
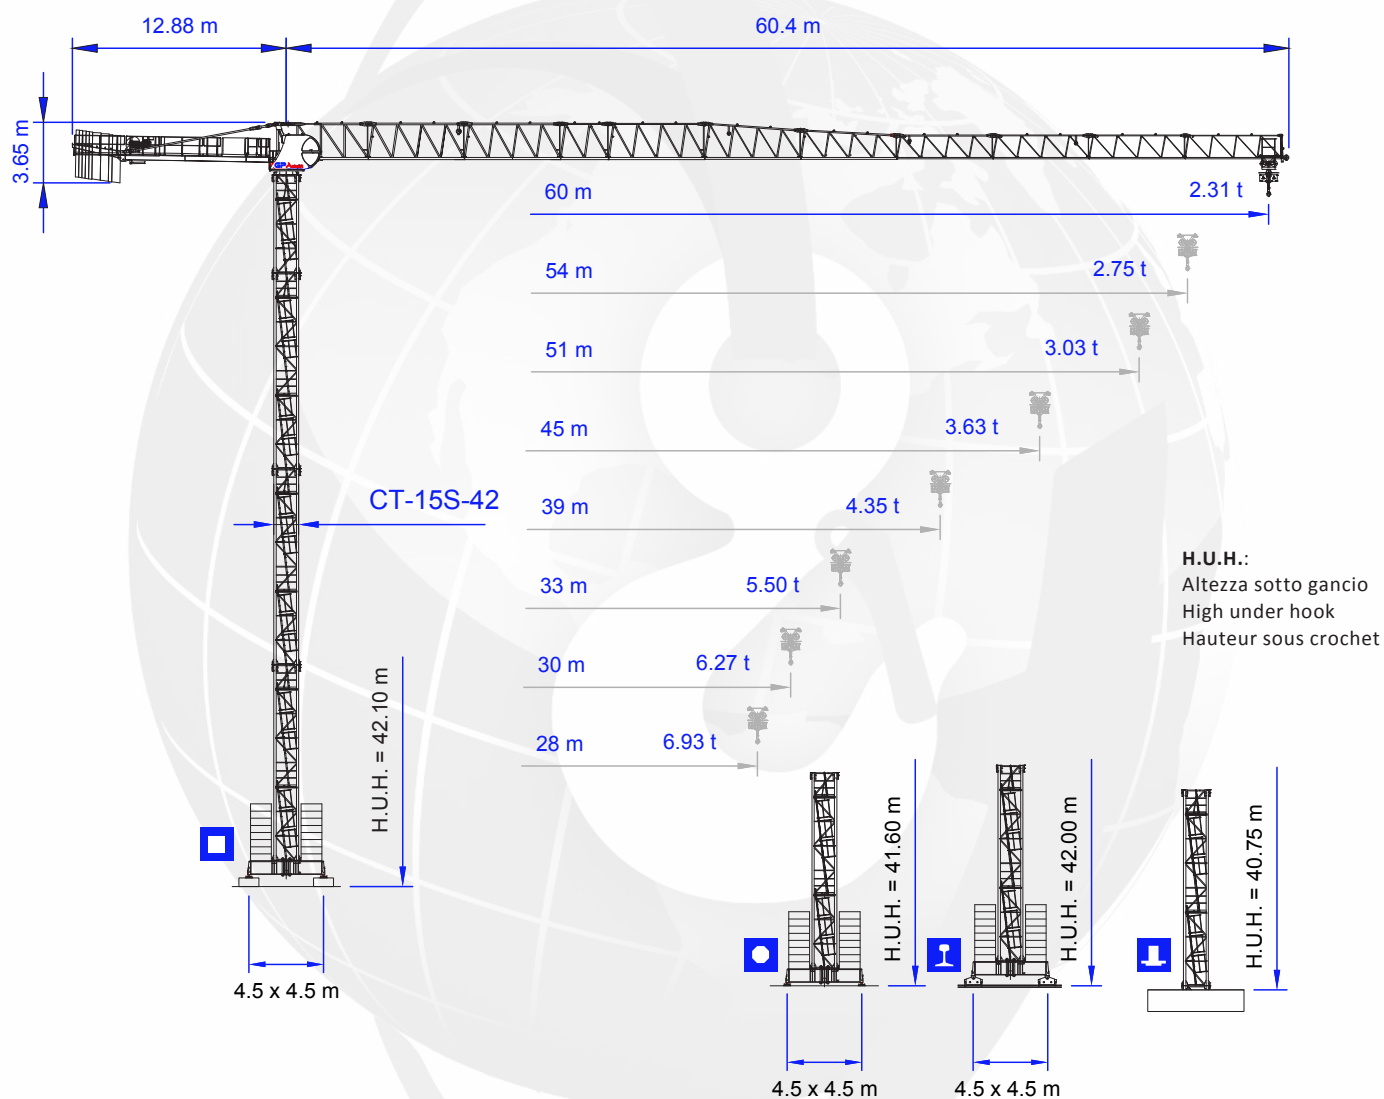






REALIZZAZIONE, PROGETTAZIONE E DEPOSITO DI PROPRIETÀ DELLA GP AUTOLIFT SRL
RÉALISATION ET LA CONCEPTION DE LA PROPRIÉTÉ DÉPOSÉE PAR GP AUTOLIFT SRL
REALIZATION AND DESIGN BY GP AUTOLIFT SRL INTELLECTUAL PROPERTY

PROGETTO E DESIGN A CURA DI INGEGNER EMANUELE GREPPI
PROJECT AND DESIGN BY EMANUELE GREPPI
ARCHITECTE INGÉNIEUR CHEF M. EMANUELE GREPPI

Jib 8T [m]	Diagramma di portata • load diagrams • diagramme de charge • Kaldırma Kapasitesi диаграмма											
	19,8	20,3	20,6	21,1	21,7	21,8	22,5	22,7	23,0	23,6	24,1	24,6
28	5434	5585	5687	5843	6034	6062	6280	6323	6424	6611	6771	6930
30	5024	5165	5261	5406	5583	5609	5812	5853	5947	6121	6270	
33	4505	4633	4720	4851	5012	5036	5220	5257	5342	5500		
36	4075	4191	4271	4391	4538	4560	4728	4762	4840	II Ropes		
39	3712	3819	3892	4003	4139	4159	4314	4345				
42	3401	3501	3569	3672	3798	3816	3960					
45	3133	3226	3289	3385	3503	3520						
48	2899	2986	3045	3135	3245							
51	2693	2775	2831	2915								
54	2510	2587	2640							+ 100 Kg		
57	2347	2420										
60	2200											

AUTOLIFT Senza il sistema Autolift tutte le portate intermedie diminuiscono il carico del 10% / All intermediate loads are decreased of 10% if the crane is not equipped with Autolift control / Les charges intermédiaires sont diminuées de 10% si la grue n'est pas équipé d'un contrôle Autolift / Eğer kreyin Autolift sistemi ile donatılmamışsa, bütün orta seviye yüklemelerde kapasite %10 azalır.- (Autolift, GPA tarafından opsiyonel olarak sunulmaktadır) / без Autolift промежуточной уменьшается на 10% нагрузки.

Meccanismi • Mechanisms • Mécanismes • Mekanizmalar • механизмы							
[kW]			[kg]	[m/min]	[kg]	[m/min]	
							
	40 HP - 30 kW fune φ12mm LEBUS Fune 450m	1	8000	3,5	4000	7	
		2	8000	10	4000	20	
		3	8000	19,5	4000	39	
		4	6000	29	3000	58	
		5	3000	42	1500	84	
		5*	1000	47	500	94	
	50 HP - 37 kW fune φ12mm LEBUS Fune 670m	1	8000	4,0	4000	8	
		2	8000	13	4000	25	
		3	8000	21	4000	42	
		4	6000	38	2870	75	
		5	4000	50	1500	100	
		5*	1000	58	1000	116	
	60 HP - 45 kW fune φ12mm LEBUS Fune 570m	1	8000	5,5	4000	11	
		2	8000	13	4000	26	
		3	8000	24	4000	48	
		4	5700	46	2870	92	
		5	3000	65	1500	130	
		5*	1600	75	800	150	
			m/min	5.5 kW	* velocità regolata automaticamente da sensore di corrente / speed automatically controlled by a current sensor / vitesse réglée automatiquement par capteur de courant / Hız sensörler tarafından otomatik olarak kontrol edilir / скорость автоматически регулируется датчиком тока		
			rpm	n. 2 x 4.0 kW			
	19		m/min	n. 2 x 3.0 kW			
Assorbimenti / Power consumption / Puissance électrique /Enerji / поглощения				Kw	40HP	50HP	60HP
					35	40	47



GP Autolift

Gru, Progetti e Automazioni per il sollevamento - Cranes, Projects and lifts'automations

Sede Legale: Via Melchiorre Gioia, 8 - 20124 Milano

Sede operativa: via U. Giordano, 1/13 - 21017 Samarate (VA) - Tel. +39 0331 1820275 - Fax +39 0331 1820276 • info@gpautolift.com
www.gpautolift.com