

# Hydraulic Crawler Crane

# CKE

# 900G


Model : CKE900G

Max. Lifting Capacities : **90 t x 3.4 m\***

Max. Crane Boom Length : **61.0 m**

Max. Fixed Jib Combination: **51.8 m + 18.3 m**

\* Auxiliary sheave is necessary.

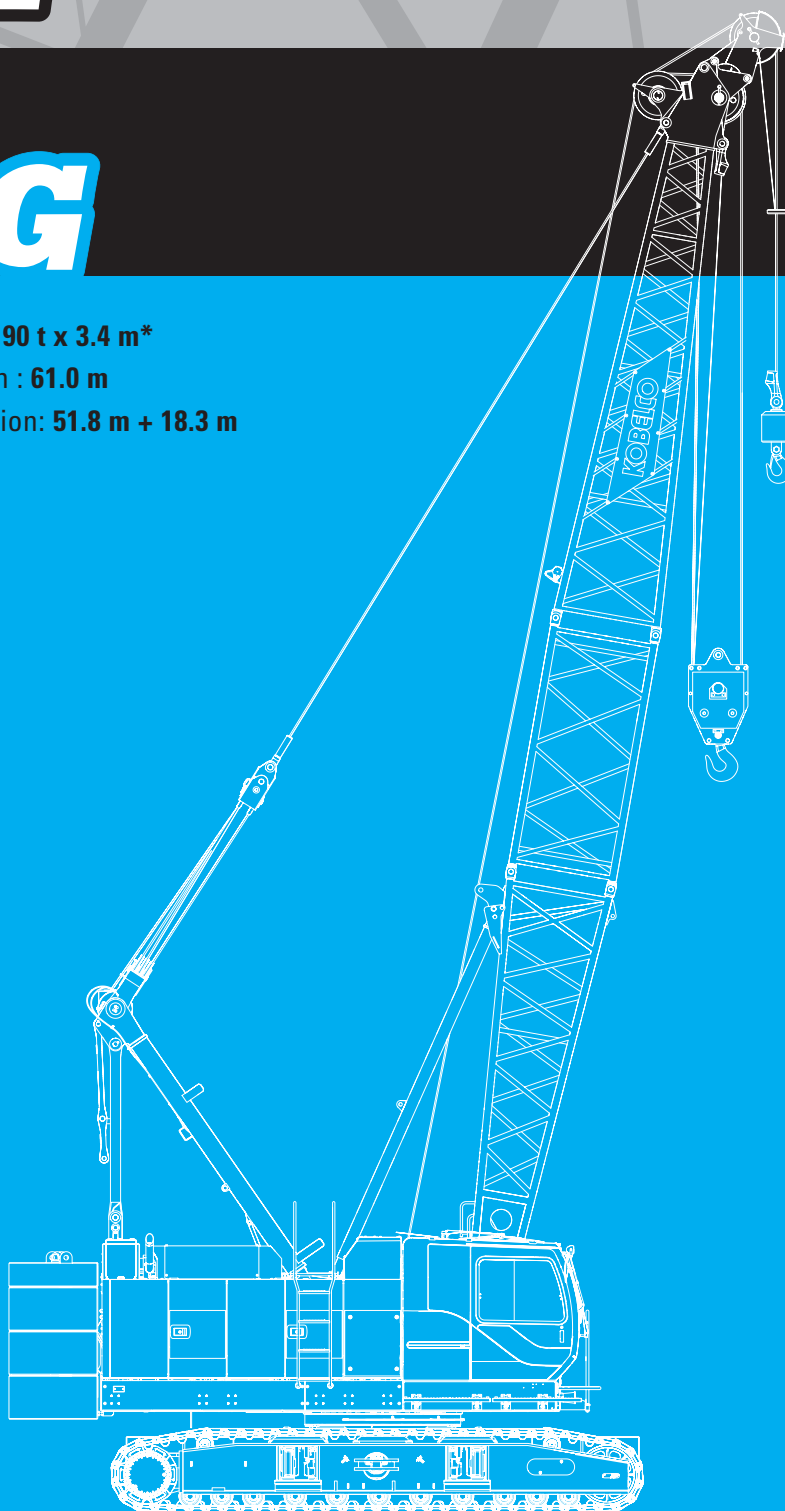

# KOBELCO



# **CKE900G**

## **CONTENTS**

**3**

**SPECIFICATIONS**

**5**

**GENERAL DIMENSIONS**

**6**

**BOOM AND JIB ARRANGEMENTS**

**7**

**WORKING RANGES**

**10**

**SUPPLEMENTAL DATA**

**11**

**LIFTING CAPACITIES**

**16**

**TRANSPORTATION PLAN**

**17**

**PARTS AND ATTACHMENTS**

# SPECIFICATIONS



## Power Plant

**Model:** HINO J08E-UV

**Type:** 4 cycle, water-cooled, vertical in-line 6, direct injection, turbo-charger, intercooler

Complies with NRMM (Europe) Stage IIIB and US EPA Tier Interim Tier 4

**Displacement:** 7,684 liters

**Rated power:** 213 kW/2100 min<sup>-1</sup> (285 HP/2,100 rpm)

**Max. Torque:** 1,017 N·m/1,600 min<sup>-1</sup>

**Cooling System:** Water-cooled

**Starter:** 24V-5kW

**Radiator:** Corrugated type core, thermostatically controlled

**Air cleaner:** Dry type with replaceable paper element

**Throttle:** Twist grip type hand throttle, electrically actuated

**Fuel filter:** Replaceable paper element

**Batteries:** Two 12V x 136 Ah/5HR capacity batteries, series connected

**Fuel tank capacity:** 400 liters



## Hydraulic System

**Main pumps:** 3 variable displacement piston pumps

**Control:** Full-flow hydraulic control system for infinitely variable pressure to all winches, propel and swing. Controls respond instantly to the touch, delivering smooth function operation.

**Cooling:** Oil-to-air heat exchanger (plate-fin type)

**Filtration:** Full-flow and bypass type with replaceable element

**Max. relief valve pressure:**

**Load hoist, boom hoist and propel system:**

31.9 MPa (4,626 psi)

**Swing system:** 27.5 MPa (3,989 psi)

**Control system:** 5.4 MPa (783 psi)

**Hydraulic Tank Capacity:** 440 liters (116.2 US Gal)



## Boom Hoisting System

Powered by a hydraulic motor through a planetary reducer.

**Brake:** A spring-set, hydraulically released multiple-disc brake is mounted on the boom hoist motor and operated through a counter-balance valve.

**Drum Lock:** External ratchet for locking drum

**Drum:** Single drum, grooved for 16mm dia. wire rope

**Line Speed:** Single line on first drum layer

**Hoisting/Lowering:** 70 to 2 m/min

**Diameter of wire rope**

**Main winch:** 26 mm x 240 m (1-1/32 in x 771 ft)

**Aux. winch:** 26 mm x 165 m (1-1/32 in x 525 ft)

**Third winch:** 22 mm x 145 m (5/8 in. x 492 ft)

**Boom hoisting/lowering:** 16 mm x 150 m (5/8 in. x 492 ft)

**Boom guy line:** 30 m (1-3/16 in.)

**Boom backstops:** Required for all boom length



## Load Hoisting System

Front and rear drums for load hoist powered by a hydraulic variable plunger motors, driven through planetary reducers.

**Negative Brake:** A spring-set, hydraulically released multiple-disc brake is mounted on the hoist motor and operated through a counter-balance valve. (Positive free fall brake is optional)

**Drum Lock:** External ratchet for locking drum

**Drums:**

**Front Drums:**

614 mm (2 ft 3/16 inch) P.C.D x 545 m (2 ft 9/32 inch) wide drum, grooved for 26 mm (1-1/32 inch) wire rope. Rope capacity is 240 m (787 ft) working length and 360 m (1,181 ft) storage length.

**Rear Drum:** 614 mm (2 ft 3/16 inch) P.C.D x 617 m (2 ft 9/32 inch), grooved for 26 mm (1-1/32 inch) wire rope. Rope capacity is 165 m (541 ft) working length and 360 m (1,181 ft) storage length.

**Line Speed:** Single line on first drum layer

**Hoisting/lowering:** 120 to 3 m/min

**Line Pull:**

**Max. Line Pull (Single Line):** 208 kN (46,800 lbs)

(Referential performance)

**Rated Line Pull:** 112 kN (25,200 lbs)



## Swing System

Swing unit is powered by hydraulic motor driving spur gears through planetary reducers (2 set), the swing system provides 360° rotation.

**Swing parking brakes:** A spring-set, hydraulically released multiple-disc brake is mounted on swing motor.

**Swing circle:** Single-row ball bearing with an integral internally cut swing gear.

**Swing lock:** Manually, four position lock for transportation

**Swing Speed:** 4.0 min<sup>-1</sup> (rpm)



## Upper Structure

Torsion-free precision machined upper frame. All components are located clearly and service friendly. Engine will with low noise level.

**Counter weight:** 31.9 ton



## Cab & Control

Totally enclosed, full vision cab with safety glass, fully adjustable, high backed seat with a headrest and armrests, and intermittent wiper and window washer (skylight and front window).

**Cab fittings:**

Air conditioner, convenient compartment (for tool), cup holder, ashtray, cigarette lighter, sun visor, roof blind, tinted glass, floor mat, footrest, and shoe tray

**Controls:**

Four adjustable levers for front drum, rear drum, boom drum and swing controls.

**Lower Structure**

Steel-welded carbody with axles. Crawler assemblies are designed with quick disconnect feature for individual removal as a unit from axles. Crawler belt tension is maintained by hydraulic jack force on the track adjusting bearing block.

**Carbodyweight:** 14.4 ton

**Crawler drive:** Independent hydraulic propel drive is built into each crawler side frame. Each drive consists of a hydraulic motor propelling a driving tumbler through a planetary gear box. Hydraulic motor and gear box are built into the crawler side frame within the shoe width.

**Crawler brakes:** Spring-set, hydraulically released parking brakes are built into each propel drive.

**Steering mechanism:** A hydraulic propel system provides both skid steering (driving one track only) and counter-rotating steering (driving each track in opposite directions).

**Track rollers:** Sealed track rollers for maintenance-free operation.

**Shoe (flat):** 800 mm wide each crawler

**Max. gradeability:** 40%

**Weight**

Including upper and lower machine, 31.9 ton counterweight and 14.4 ton carbody weight, basic boom (or basic boom + basic jib), hook, and other accessories.

**Weight:** 90.1 ton

**Ground pressure:** 101 kPa (10.8 psi)

**Attachment****Boom & Jib:**

Welded lattice construction using tubular, high-tensile steel chords with pin connection between sections.

**Boom and Jib length**

	Min. Length (Min. combination)	Max. Length (Min. combination)
Crane Boom	40 m	61.0 m
Fixed jib	24.4 m + 9.1 m	51.8 m + 18.3 m

**Main Specifications (Model: CKE900G)**

Crane Boom	
Max. Lifting Capacity	90 t x 3.4 m <sup>*3</sup>
Max. Length	61.0 m
Fixed Jib	
Max. Lifting Capacity	10.9 t x 18.0 m
Max. Combination	51.8 m + 18.3 m
Main & Aux. Winch	
Max. Line Speed (1st layer)	120 m/min
Rated Line Pull (Single line)	112 kN {11.4 tf}
Wire Rope Diameter	26 mm x 240 m
Wire Rope Length	240 m (Main), 165 m (Aux)
Brake Type	Wet-type multiple disc brake (Optional)
Working Speed	
Swing Speed	4.0 min <sup>-1</sup> {rpm}
Travel Speed	1.73/1.15 km/h
Power Plant	
Model	HINO J08E-UV
Engine Output	213 kW/2100min <sup>-1</sup>
Fuel Tank	400 liters

**Hydraulic System**

Main Pumps	3 variable displacement
Max. Pressure	31.9 Mpa {325 kg/cm <sup>2</sup> }
Hydraulic Tank Capacity	440 liters

**Self-Removal Device**

	Counterweight/crawler self-removal device (Option)
--	--

**Weight**

Operating Weight	90.1 t <sup>*1</sup>
Ground Pressure	101 kPa
Counterweight	31,900 kg
Transport Weight	41,360 kg <sup>*2</sup>

Units are SI units. { } indicates conventional units.

Line speeds in table are for light loads. Line speed varies with load.


<sup>\*1</sup> Including upper and lower machine, 31.9 ton counterweight, 14.4 ton carbody weight, basic boom, hook, and other accessories.

<sup>\*2</sup> Base machine with boom base, gantry, crawlers, and wire ropes (front/boom hoist)


<sup>\*3</sup> Auxiliary sheave is must.

# GENERAL DIMENSIONS


(Unit: mm)

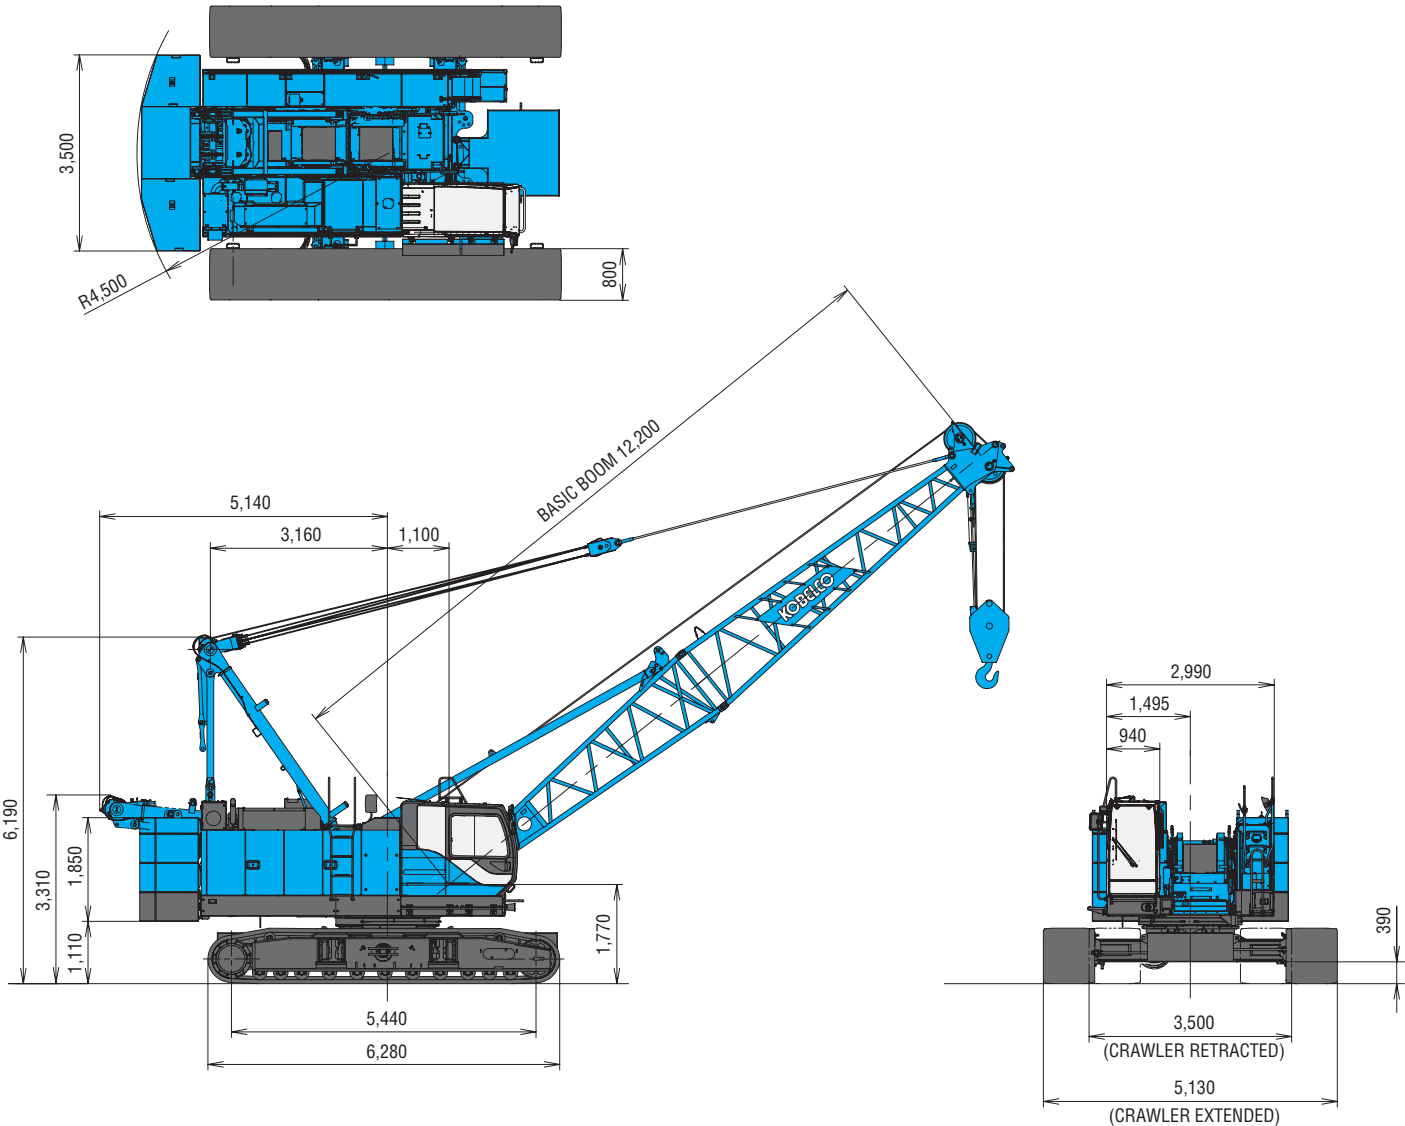

## Limit of Hook Lifting

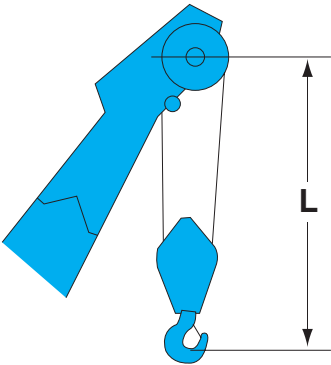

Hook	L
90 t hook	4.1 m
70 t hook	4.1 m
50 t hook	4.0 m
35 t hook	3.9 m

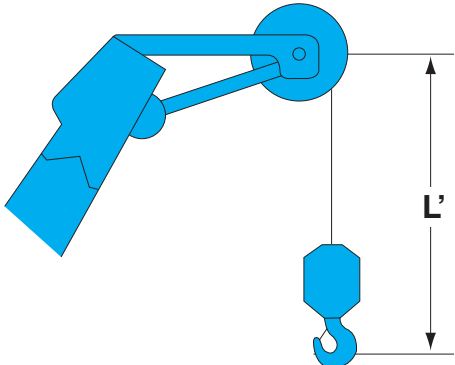

Hook	L'
11 t ball hook	3.5 m
11 t swivel hook	3.3 m

# BOOM AND JIB ARRANGEMENTS

## Crane Boom Arrangements

Boom length m (ft)	Boom arrangement
12.2 (40)	
15.2 (50)	
18.3 (60)	
21.3 (70)	
24.4 (80)	
27.4 (90)	
30.5 (100)	
33.5 (110)	
36.6 (120)	
39.6 (130)	

Boom length m (ft)	Boom arrangement
42.7 (140)	
45.7 (150)	
48.8 (160)	
51.8 (170)	
54.9 (180)	
57.9 (190)	
61.0 (200)	


Symbol	Boom Length	Remarks
	5.8 m	Boom Base
	6.4 m	Boom Top
	3.0 m	Insert Boom
	6.1 m	Insert Boom
	12.2 m	Insert Boom
	12.2 m	Insert Boom with lug

↗ mark shows the boom insert with lug attached and the guy line installing position when the fixed jib is used.

mark shows the standard boom arrangement which make the boom arrangement of less than the each boom length possible.

mark shows the installing of the cable roller for the insert boom.

## Fixed Jib Arrangements

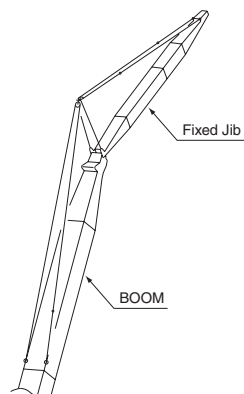


Crane boom length	Jib length m (ft)	Jib arrangement
24.4 m ~ 51.8 m	9.1 (30)	
	12.2 (40)	
	15.2 (50)	
	18.3 (60)	

Symbol	Jib Length	Remarks
	4.6 m	Jib Base
	4.6 m	Jib Top
	3.0 m	Insert Jib
	6.1 m	Insert Jib


# WORKING RANGES

## Crane Boom

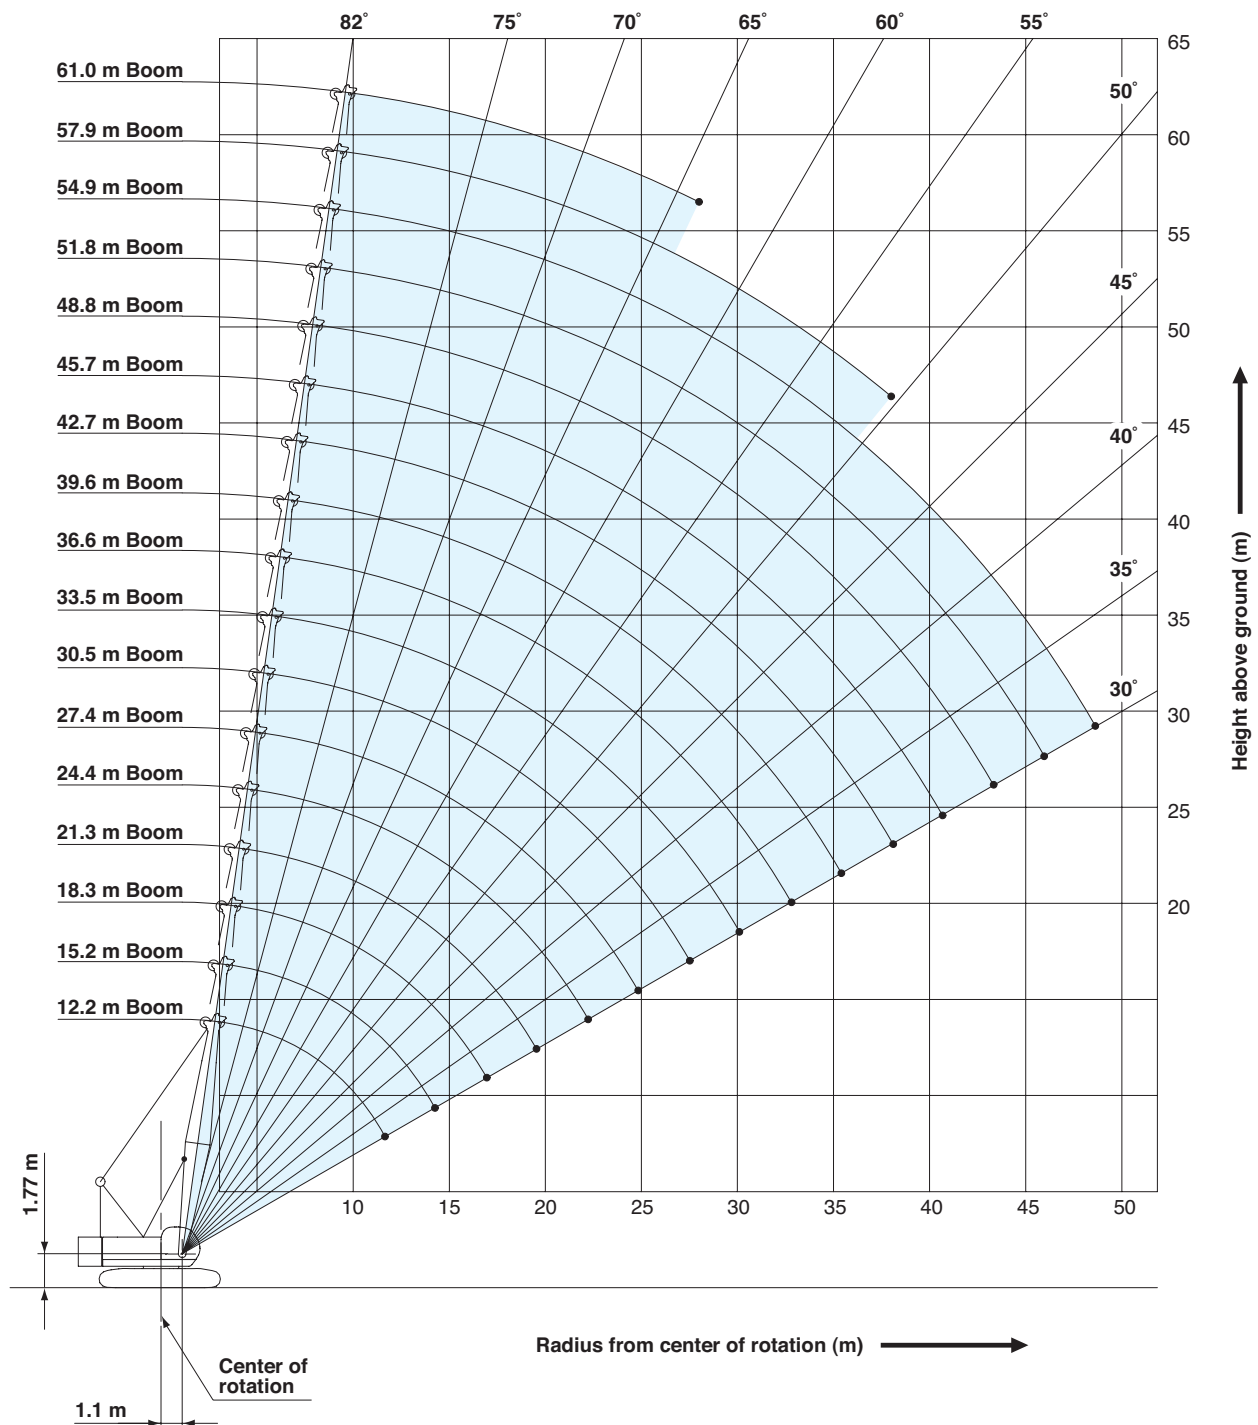





# Fixed Jib 10°

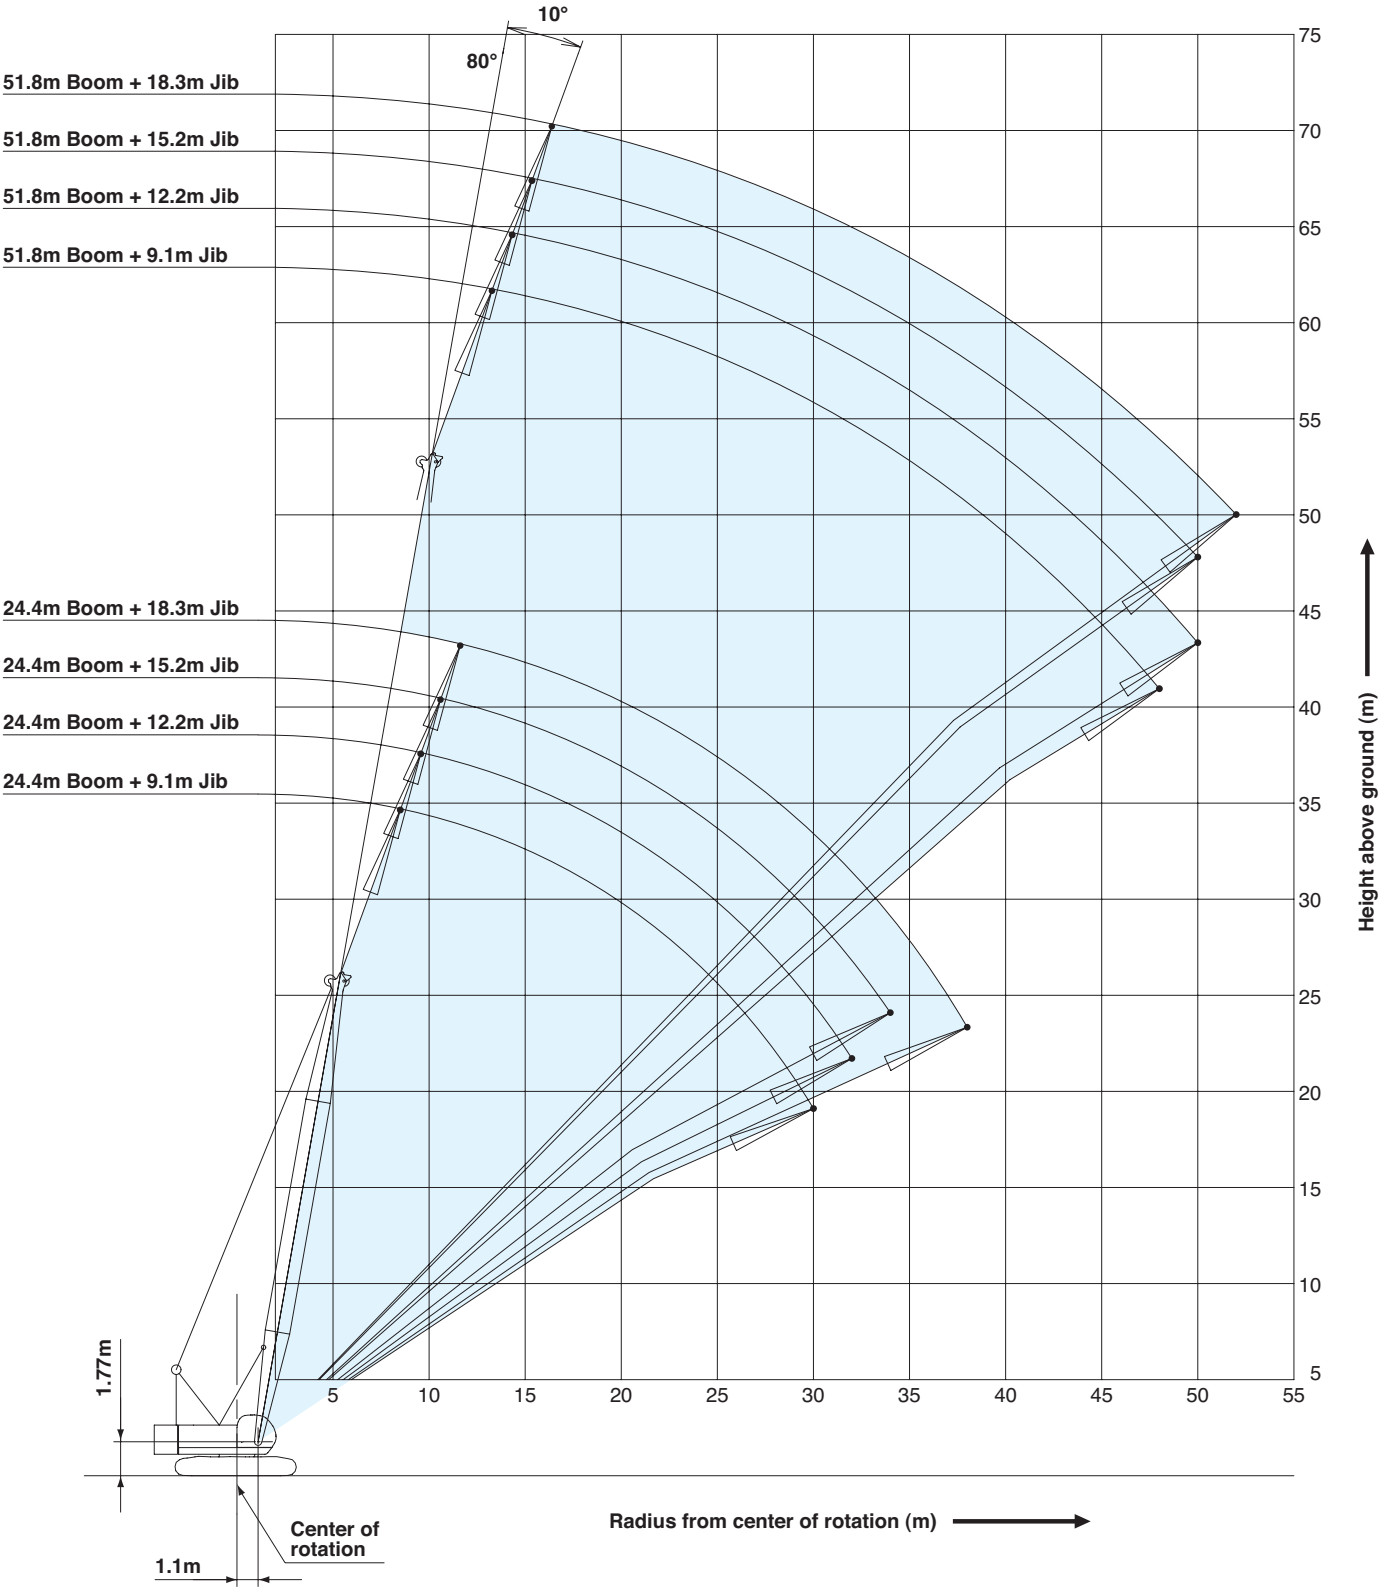

# WORKING RANGES

## Fixed Jib 30°

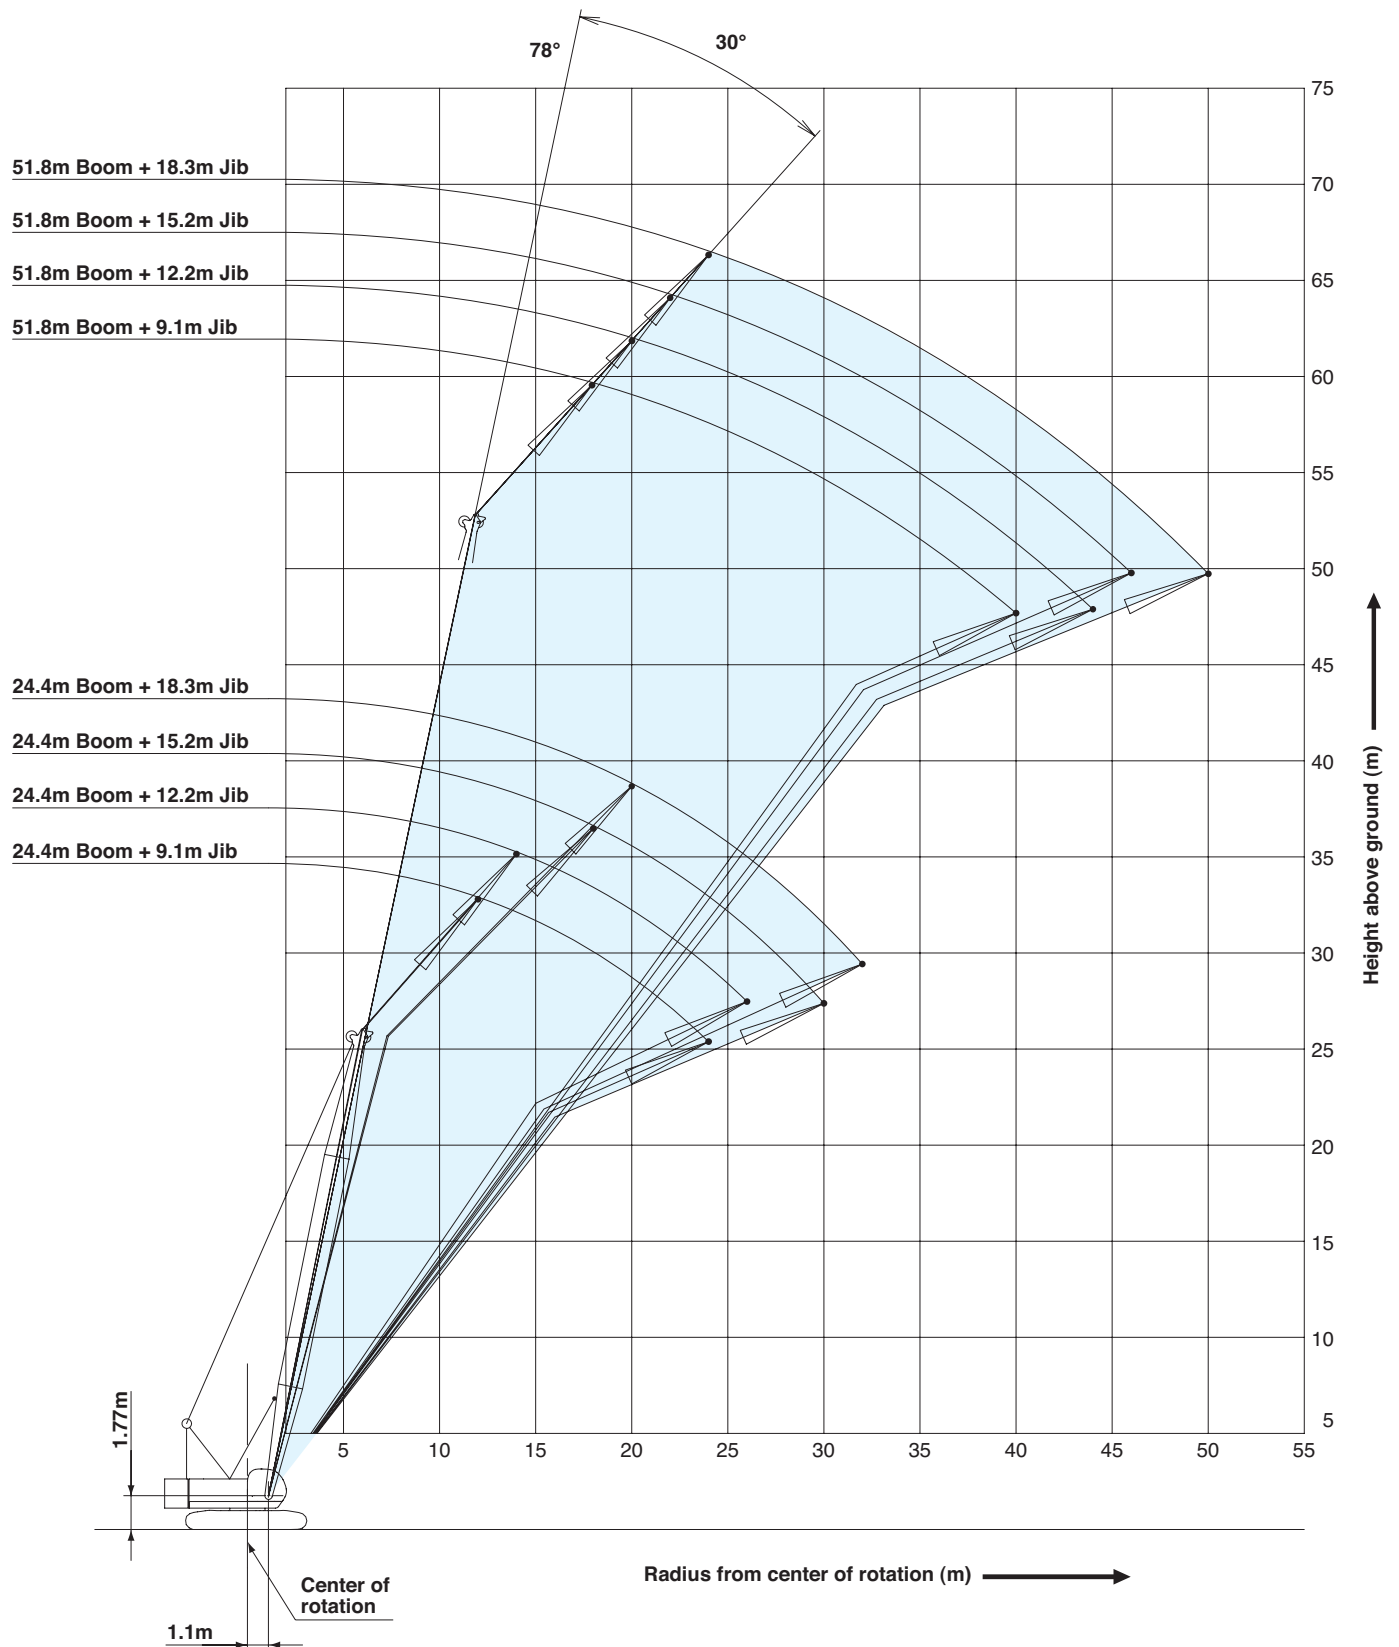

- Ratings according to EN13000.
- Operating radius is the horizontal distance from centerline of rotation to a vertical line through the center of gravity of the load.
- Deduct weight of hook block (s), slings and all other load handling accessories from main boom ratings shown.
- Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions, out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment.  
The operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
- Ratings are for operation on a firm and level surface, up to 1 % gradient.
- At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
- Boom inserts and guy lines must be arranged as shown in the "operator's manual".
- Boom hoist reeving is 12 part line.
- Gantry must be in raised position for all conditions.
- Boom backstops are required for all boom lengths.
- The boom should be erected over the front of the crawlers, not laterally.
- Ratings inside of boxes  are limited by strength of materials.
- The minimum rated load is 1.4 (ton).
- Crawler frames must be fully extended for all crane operations.

## (Main boom)

- The total load that can be lifted is the value for weight of hook block, slings, and all other load handling accessories deducted from main boom ratings shown.

## (Main boom with auxiliary sheave frame)

- The total load that can be lifted is the value for weight of main hook block, slings, and all other load handling accessories deducted from main boom with auxiliary sheave ratings shown.

## (Auxiliary sheave)

- The total load that can be lifted is the value for weight of auxiliary sheave hook block, slings, and all other load handling accessories deducted from auxiliary sheave ratings shown.
- Boom lengths for auxiliary sheave mounting are 12.2 m to 57.9 m.

## (Main boom with fixed jib)

- The total load that can be lifted is the value for weight of main hook block, slings, and all other load handling accessories deducted from main boom with fixed jib ratings shown.
- Only 35 t, 50 t and 70 t hook block can be used for main hook.

## (Fixed jib)

- The total load that can be lifted is the value for weight of jib hook block, slings, and all other load handling accessories deducted from fixed jib ratings shown.
- Boom lengths for fixed jib mounting are 24.4 m to 51.8 m.

## Main hoist loads

No. of Parts of Line	1	2	3	4	5
Maximum Loads (kN)	112	224	335	447	559
Maximum Loads (t)	11.4	22.8	34.2	45.6	57.0

No. of Parts of Line	6	7	8
Maximum Loads (kN)	671	779	883
Maximum Loads (t)	68.4	79.4	90.0

## Auxiliary hoist loads

No. of Parts of Line	1
Maximum Loads (kN)	108
Maximum Loads (t)	11.0

Weight of hook block					
Hook Block	90 t	70 t	50 t	35 t	11 t Ball Hook
Weight (t)	1.3	0.9	0.85	0.7	0.3

Operation of this equipment in excess of rated loads or disregard of instruction voids the warranty.

# LIFTING CAPACITIES



## Crane Boom Lifting Capacities

Counterweight: 31.9 t  
Carbody Weight: 14.4 t

Unit: metric ton

Working radius (m) \ Boom Length (m)	12.2	15.2	18.3	21.3	24.4	27.4	30.5	33.5	36.6	39.6	Working radius (m) \ Boom Length (m)
3.9	90.0	89.9	89.7								3.9
4.0	89.0	88.9	88.7	4.3m/68.4							4.0
4.5	79.6	79.5	79.4	68.4	4.7m/68.4						4.5
5.0	72.1	71.9	71.8	68.4	67.6	5.1m/57.0					5.0
5.5	65.8	65.7	65.5	63.6	60.6	57.0	5.6m/54.0				5.5
6.0	60.5	60.3	59.9	57.5	54.9	52.7	50.5	45.6	6.4m/41.9	6.8m/34.2	6.0
7.0	48.6	48.5	48.4	48.1	46.2	44.5	42.9	41.5	40.0	34.2	7.0
8.0	39.9	39.8	39.7	39.9	39.8	38.5	37.2	36.1	35.0	33.9	8.0
9.0	33.8	33.7	33.6	33.8	33.6	33.6	32.8	31.9	31.0	30.1	9.0
10.0	29.3	29.2	29.1	29.2	29.1	29.0	28.9	28.5	27.7	27.0	10.0
12.0	11.8m/22.9	22.9	22.8	22.9	22.8	22.7	22.6	22.6	22.5	22.3	12.0
14.0		18.8	18.6	18.8	18.6	18.5	18.4	18.4	18.3	18.3	14.0
16.0		14.4m/18.1	15.7	15.8	15.7	15.6	15.5	15.4	15.3	15.3	16.0
18.0			17.0m/14.5	13.7	13.5	13.4	13.3	13.2	13.1	13.1	18.0
20.0				19.6m/12.2	11.8	11.7	11.6	11.5	11.4	11.4	20.0
22.0					10.5	10.4	10.2	10.2	10.0	10.0	22.0
24.0					22.3m/10.3	9.3	9.1	9.1	8.9	8.9	24.0
26.0						24.9m/8.8	8.2	8.2	8.0	8.0	26.0
28.0							27.6m/7.6	7.4	7.2	7.2	28.0
30.0								6.8	6.6	6.5	30.0
32.0								30.2m/6.7	6.0	6.0	32.0
34.0									32.9m/5.8	5.5	34.0
36.0										35.5m/5.1	36.0
Reeves	8	8	8	6	6	5	5	4	4	4	Reeves

Working radius (m) \ Boom Length (m)	42.7	45.7	48.8	51.8	54.9	57.9	61.0	Working radius (m) \ Boom Length (m)
7.0	7.3m/31.9	7.7m/28.0						7.0
8.0	31.4	27.8	8.1m/22.1	8.5m/19.2				8.0
9.0	29.2	26.2	20.8	18.6	16.2	9.4m/13.9	9.8m/11.8	9.0
10.0	26.2	24.5	19.5	17.4	15.2	13.4	11.7	10.0
12.0	21.7	21.2	17.3	15.4	13.3	11.7	10.2	12.0
14.0	18.1	18.0	15.5	13.8	11.9	10.4	9.0	14.0
16.0	15.2	15.1	14.1	12.4	10.7	9.3	8.0	16.0
18.0	12.9	12.9	12.8	11.4	9.7	8.4	7.2	18.0
20.0	11.2	11.2	11.1	10.4	8.9	7.6	6.5	20.0
22.0	9.9	9.8	9.8	9.6	8.1	7.0	5.9	22.0
24.0	8.7	8.7	8.6	8.5	7.5	6.4	5.4	24.0
26.0	7.8	7.7	7.7	7.6	6.9	5.9	4.9	26.0
28.0	7.0	7.0	6.9	6.8	6.4	5.4	4.5	28.0
30.0	6.4	6.3	6.3	6.1	6.0	5.0		30.0
32.0	5.8	5.7	5.7	5.6	5.4	4.6		32.0
34.0	5.3	5.2	5.1	5.0	4.9	4.3		34.0
36.0	4.8	4.8	4.7	4.6	4.4	4.0		36.0
38.0	4.4	4.4	4.2	4.1	4.0	3.6		38.0
40.0	38.1m/4.4	4.0	3.9	3.8	3.6			40.0
44.0		40.8m/3.9	43.4m/3.3	3.1	3.0			44.0
48.0				46.1m/2.8	2.5			48.0
52.0					48.7m/2.4			52.0
Reeves	4	4	2	2	2	2	2	Reeves

Note:

Ratings according to EN13000.

Ratings shown in   are determined by the strength of the boom or other structural components.



# Fixed Jib Lifting Capacities (Without Main Hook Block)

Counterweight: 31.9 t

Carbody Weight: 14.4 t

Jib Offset Angle : 10°

Unit: metric ton

Boom length (m)		24.4				27.4				30.5				Boom length (m)
Jib length (m)		9.1	12.2	15.2	18.3	9.1	12.2	15.2	18.3	9.1	12.2	15.2	18.3	Jib length (m)
Working radius (m)	9.0	10.9												9.0
	10.0	10.9				10.9				10.9				10.0
	12.0	10.9	10.9	9.0		10.9	10.9	9.0		10.9	10.9			12.0
	14.0	10.9	10.9	9.0	8.1	10.9	10.9	9.0	8.1	10.9	10.9	9.0	8.1	14.0
	16.0	10.9	10.5	8.7	7.7	10.9	10.9	9.0	7.9	10.9	10.9	9.0	8.1	16.0
	18.0	10.9	9.5	7.8	6.8	10.9	10.2	8.3	7.2	10.9	10.6	8.7	7.5	18.0
	20.0	10.3	8.6	7.1	6.2	10.2	9.2	7.5	6.5	10.1	9.7	7.9	6.8	20.0
	22.0	9.0	7.8	6.5	5.6	8.9	8.4	6.9	5.9	8.8	8.9	7.2	6.2	22.0
	24.0	8.0	7.2	5.9	5.1	7.9	7.7	6.3	5.4	7.8	8.0	6.6	5.7	24.0
	26.0	7.2	6.7	5.5	4.7	7.1	7.1	5.8	5.0	7.0	7.1	6.2	5.3	26.0
	28.0	6.5	6.2	5.1	4.4	6.4	6.5	5.4	4.6	6.3	6.4	5.7	4.9	28.0
	30.0	5.9	5.8	4.8	4.1	5.8	5.9	5.1	4.3	5.7	5.8	5.4	4.6	30.0
	32.0		5.5	4.5	3.8	5.3	5.4	4.8	4.1	5.2	5.3	5.1	4.3	32.0
	34.0			4.2	3.6		4.9	4.5	3.8	4.7	4.8	4.8	4.0	34.0
	36.0				3.4			4.3	3.6		4.4	4.5	3.8	36.0
	38.0				3.2			4.1	3.4		4.0	4.1	3.6	38.0
	40.0								3.2			3.8	3.4	40.0
	42.0												3.3	42.0
	44.0												3.1	44.0
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	Reeves

Boom length (m)		33.5				36.6				39.6				Boom length (m)
Jib length (m)		9.1	12.2	15.2	18.3	9.1	12.2	15.2	18.3	9.1	12.2	15.2	18.3	Jib length (m)
Working radius (m)	12.0	10.9	10.9			10.9				10.9				12.0
	14.0	10.9	10.9	9.0	8.1	10.9	10.9	9.0		10.9	10.9	9.0		14.0
	16.0	10.9	10.9	9.0	8.1	10.9	10.9	9.0	8.1	10.9	10.9	9.0	8.1	16.0
	18.0	10.9	10.9	9.0	7.8	10.9	10.9	9.0	8.1	10.9	10.9	9.0	8.1	18.0
	20.0	10.0	10.1	8.3	7.1	9.9	10.9	8.6	7.4	9.8	9.9	9.0	7.7	20.0
	22.0	8.7	8.8	7.6	6.5	8.6	10.1	8.0	6.8	8.5	8.6	8.2	7.0	22.0
	24.0	7.8	7.8	7.0	6.0	7.5	8.8	7.3	6.2	7.4	7.6	7.7	6.5	24.0
	26.0	7.0	7.0	6.5	5.5	6.7	7.8	6.8	5.8	6.6	6.8	6.9	6.0	26.0
	28.0	6.2	6.3	6.0	5.1	6.1	7.0	6.2	5.4	6.0	6.1	6.1	5.6	28.0
	30.0	5.6	5.7	5.6	4.8	5.5	6.3	5.7	5.0	5.4	5.4	5.6	5.2	30.0
	32.0	5.1	5.2	5.2	4.5	5.0	5.7	5.1	4.7	4.8	4.9	5.0	4.9	32.0
	34.0	4.7	4.7	4.8	4.2	4.5	5.2	4.7	4.4	4.4	4.5	4.5	4.6	34.0
	36.0	4.2	4.3	4.4	4.0	4.1	4.7	4.2	4.2	4.0	4.1	4.1	4.2	36.0
	38.0	3.9	4.0	4.0	3.8	3.8	4.3	3.9	3.9	3.7	3.7	3.8	3.8	38.0
	40.0		3.7	3.7	3.6	3.4	4.0	3.6	3.6	3.3	3.4	3.4	3.5	40.0
	42.0			3.4	3.4		3.7	3.3	3.3	3.0	3.1	3.2	3.2	42.0
	44.0				3.2			3.0	3.1		2.7	2.9	2.9	44.0
	46.0								2.8			2.6	2.7	46.0
	48.0								2.4			2.2	2.4	48.0
	50.0												2.1	50.0
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	Reeves

Note:

Ratings according to EN13000.

Ratings shown in   are determined by the strength of the boom or other structural components.

# LIFTING CAPACITIES



## Fixed Jib Lifting Capacities (Without Main Hook Block) Jib Offset Angle : 10°

Counterweight: 31.9 t  
Carbody Weight: 14.4 t

Unit: metric ton

Boom length (m)		42.7				45.7				48.8				Boom length (m)
Jib length (m)		9.1	12.2	15.2	18.3	9.1	12.2	15.2	18.3	9.1	12.2	15.2	18.3	Jib length (m)
Working radius (m)	14.0	10.9	10.9			10.9	10.9			10.9				14.0
	16.0	10.9	10.9	9.0		10.9	10.9	9.0		10.9	10.9			16.0
	18.0	10.9	10.9	9.0	8.1	10.8	10.9	9.0	8.1	10.8	10.9	9.0	8.1	18.0
	20.0	9.6	9.8	9.0	7.9	9.5	9.6	9.0	8.1	9.5	9.6	9.0	8.1	20.0
	22.0	8.4	8.5	8.5	7.3	8.3	8.4	8.5	7.6	8.2	8.4	8.5	7.8	22.0
	24.0	7.3	7.5	7.6	6.7	7.2	7.4	7.5	7.0	7.2	7.3	7.4	7.2	24.0
	26.0	6.5	6.7	6.7	6.3	6.4	6.5	6.7	6.5	6.3	6.5	6.6	6.7	26.0
	28.0	5.8	5.9	6.0	5.8	5.7	5.8	5.9	6.0	5.7	5.8	5.9	5.9	28.0
	30.0	5.2	5.3	5.4	5.4	5.1	5.2	5.3	5.4	5.1	5.2	5.2	5.3	30.0
	32.0	4.7	4.8	4.9	4.9	4.6	4.7	4.8	4.8	4.6	4.6	4.7	4.8	32.0
	34.0	4.3	4.3	4.4	4.5	4.2	4.2	4.3	4.4	4.1	4.2	4.3	4.3	34.0
	36.0	3.8	3.9	4.0	4.0	3.7	3.8	3.9	3.9	3.7	3.8	3.8	3.9	36.0
	38.0	3.5	3.6	3.6	3.7	3.5	3.5	3.5	3.6	3.4	3.4	3.5	3.5	38.0
	40.0	3.2	3.3	3.3	3.3	3.1	3.2	3.2	3.3	3.0	3.1	3.2	3.2	40.0
	42.0	2.9	3.0	3.0	3.1	2.8	2.9	2.9	3.0	2.8	2.8	2.9	2.9	42.0
	44.0	2.5	2.7	2.8	2.8	2.5	2.6	2.7	2.7	2.5	2.5	2.6	2.6	44.0
	46.0	2.2	2.3	2.5	2.6	2.2	2.3	2.4	2.5	2.2	2.2	2.4	2.4	46.0
	48.0		2.0	2.2	2.3	1.8	2.0	2.1	2.2	1.8	1.9	2.1	2.1	48.0
	50.0			1.9	2.0		1.7	1.8	1.9	1.4	1.6	1.8	1.9	50.0
	52.0				1.7			1.6	1.7			1.5	1.6	52.0
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	Reeves

Boom length (m)		51.8			
Jib length (m)		9.1	12.2	15.2	18.3
Working radius (m)	14.0	10.9			
	16.0	10.9	10.9		
	18.0	10.7	10.8	9.0	8.1
	20.0	9.4	9.5	9.0	8.1
	22.0	8.1	8.3	8.3	8.0
	24.0	7.1	7.2	7.3	7.4
	26.0	6.2	6.4	6.5	6.6
	28.0	5.6	5.7	5.8	5.8
	30.0	5.0	5.1	5.1	5.2
	32.0	4.4	4.5	4.6	4.7
	34.0	4.0	4.1	4.2	4.2
	36.0	3.6	3.6	3.7	3.8
	38.0	3.3	3.3	3.4	3.4
	40.0	2.9	3.0	3.0	3.1
	42.0	2.7	2.7	2.8	2.8
	44.0	2.3	2.4	2.5	2.5
	46.0	2.1	2.1	2.2	2.3
	48.0	1.7	1.8	1.9	2.0
	50.0		1.5	1.6	1.7
	52.0				1.5
Reeves		1	1	1	1

Note:

Ratings according to EN13000.

Ratings shown in   are determined by the strength of the boom or other structural components.



# Fixed Jib Lifting Capacities (Without Main Hook Block)

## Jib Offset Angle : 30°

Counterweight: 31.9 t

Carbody Weight: 14.4 t

Unit: metric ton

Boom length (m)		24.4				27.4				30.5				Boom length (m)
Jib length (m)		9.1	12.2	15.2	18.3	9.1	12.2	15.2	18.3	9.1	12.2	15.2	18.3	Jib length (m)
Working radius (m)	12.0	9.5												12.0
	14.0	9.3	6.9			9.4				9.5				14.0
	16.0	8.6	6.4			8.9	6.5			9.0	6.7			16.0
	18.0	8.0	5.9	4.8		8.3	6.1	4.9		8.6	6.2	5.0		18.0
	20.0	7.5	5.6	4.5	3.8	7.8	5.7	4.6	3.9	8.0	5.9	4.7	3.9	20.0
	22.0	7.1	5.3	4.2	3.6	7.4	5.4	4.3	3.6	7.6	5.6	4.4	3.7	22.0
	24.0	6.8	5.0	4.0	3.4	7.0	5.1	4.1	3.4	7.3	5.3	4.2	3.5	24.0
	26.0		4.8	3.8	3.2		4.9	3.9	3.2	7.0	5.1	4.0	3.3	26.0
	28.0			3.6	3.0		4.7	3.7	3.0	6.4	4.9	3.8	3.1	28.0
	30.0			3.5	2.9			3.6	2.9		4.7	3.7	3.0	30.0
	32.0				2.8			3.5	2.8			3.6	2.9	32.0
	34.0								2.7				2.8	34.0
	36.0												2.7	36.0
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	Reeves

Boom length (m)		33.5				36.6				39.6				Boom length (m)
Jib length (m)		9.1	12.2	15.2	18.3	9.1	12.2	15.2	18.3	9.1	12.2	15.2	18.3	Jib length (m)
Working radius (m)	14.0	9.5				9.5								14.0
	16.0	9.3	6.8			9.4				9.5				16.0
	18.0	8.8	6.4			9.0	6.5			9.2	6.6			18.0
	20.0	8.3	6.1	4.8	4.0	8.5	6.2	4.9	4.1	8.8	6.3	4.9		20.0
	22.0	7.9	5.7	4.5	3.8	8.1	5.9	4.6	3.9	8.3	6.0	4.7	3.9	22.0
	24.0	7.5	5.5	4.3	3.6	7.7	5.6	4.4	3.7	7.7	5.7	4.5	3.7	24.0
	26.0	7.1	5.2	4.1	3.4	7.0	5.4	4.2	3.5	6.9	5.5	4.3	3.5	26.0
	28.0	6.4	5.0	3.9	3.2	6.2	5.1	4.0	3.3	6.1	5.2	4.1	3.3	28.0
	30.0	5.7	4.8	3.8	3.1	5.6	4.9	3.8	3.2	5.5	5.1	3.9	3.2	30.0
	32.0		4.7	3.7	3.0	5.1	4.8	3.7	3.1	5.0	4.9	3.8	3.1	32.0
	34.0			3.5	2.9		4.6	3.6	3.0		4.6	3.7	3.0	34.0
	36.0				2.8			3.5	2.9		4.1	3.6	2.9	36.0
	38.0				2.7			3.4	2.8			3.5	2.8	38.0
	40.0								2.7				2.7	40.0
	42.0												2.6	42.0
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	Reeves

Note:

Ratings according to EN13000.

Ratings shown in   are determined by the strength of the boom or other structural components.

# LIFTING CAPACITIES



## Fixed Jib Lifting Capacities (Without Main Hook Block) Jib Offset Angle : 30°

Counterweight: 31.9 t  
Carbody Weight: 14.4 t

Unit: metric ton

Boom length (m)		42.7				45.7				48.8				Boom length (m)
Jib length (m)		9.1	12.2	15.2	18.3	9.1	12.2	15.2	18.3	9.1	12.2	15.2	18.3	Jib length (m)
Working radius (m)	16.0	9.5				9.5								16.0
	18.0	9.4	6.7			9.5				9.5				18.0
	20.0	8.9	6.4	5.1		9.1	6.5	5.1		9.2	6.6	5.1		20.0
	22.0	8.4	6.1	4.8	4.0	8.4	6.2	4.9	4.0	8.5	6.3	4.9	4.1	22.0
	24.0	7.6	5.8	4.6	3.8	7.6	5.9	4.7	3.8	7.5	6.0	4.7	3.9	24.0
	26.0	6.7	5.6	4.4	3.6	6.6	5.7	4.5	3.7	6.6	5.8	4.5	3.7	26.0
	28.0	6.0	5.4	4.2	3.4	5.9	5.5	4.3	3.5	5.9	5.6	4.3	3.6	28.0
	30.0	5.3	5.2	4.0	3.3	5.3	5.3	4.1	3.3	5.2	5.4	4.1	3.4	30.0
	32.0	4.8	5.0	3.9	3.2	4.8	4.9	4.0	3.2	4.7	4.9	4.0	3.3	32.0
	34.0	4.4	4.5	3.8	3.1	4.3	4.4	3.9	3.1	4.2	4.4	3.9	3.2	34.0
	36.0	3.9	4.1	3.7	3.0	3.9	4.0	3.7	3.0	3.9	3.9	3.8	3.1	36.0
	38.0		3.7	3.6	2.9	3.5	3.6	3.6	2.9	3.5	3.6	3.7	3.0	38.0
	40.0			3.5	2.8			3.4	2.8		3.2	3.4	2.9	40.0
	42.0				2.7			3.1	2.7		2.9	3.0	2.8	42.0
	44.0				2.6				2.7			2.7	2.7	44.0
	46.0												2.6	46.0
	48.0												2.3	48.0
	Reeves	1	1	1	1	1	1	1	1	1	1	1	1	Reeves

Boom length (m)		51.8			
Jib length (m)		9.1	12.2	15.2	18.3
Working radius (m)	18.0	9.5			
	20.0	9.3	6.6		
	22.0	8.5	6.4	5.0	
	24.0	7.5	6.1	4.8	3.9
	26.0	6.6	5.9	4.6	3.8
	28.0	5.9	5.7	4.4	3.6
	30.0	5.2	5.4	4.2	3.5
	32.0	4.7	4.8	4.1	3.4
	34.0	4.2	4.3	4.0	3.3
	36.0	3.7	3.8	3.9	3.2
	38.0	3.3	3.5	3.6	3.1
	40.0	3.0	3.2	3.3	3.0
	42.0		2.9	3.0	2.9
	44.0		2.6	2.7	2.6
	46.0			2.4	2.4
	48.0				2.2
	50.0				2.0
	Reeves	1	1	1	1











Note:

Ratings according to EN13000.

Ratings shown in   are determined by the strength of the boom or other structural components.





# TRANSPORTATION PLAN

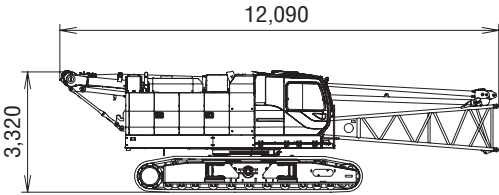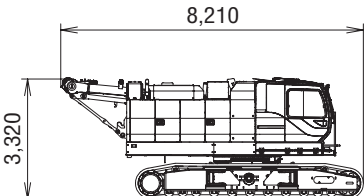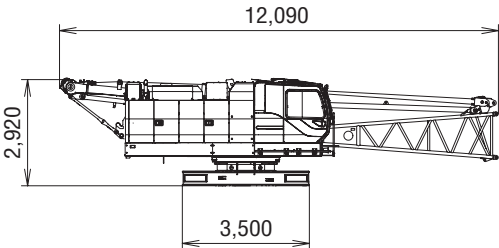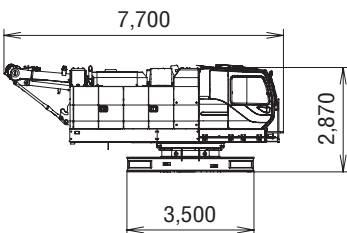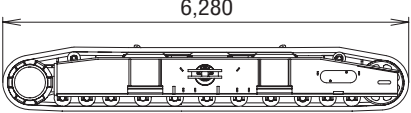Name	Dimension	Weight (kg)
<b>Base Machine</b> <ul style="list-style-type: none"> <li>• Boom base</li> <li>• Gantry</li> <li>• Crawler</li> <li>• Wire rope (Front / boom hoist)</li> </ul>	 	41,360
<b>Base Machine</b> <ul style="list-style-type: none"> <li>• Gantry</li> <li>• Crawler</li> <li>• Wire rope (Front / rear / boom hoist)</li> </ul>	 	39,300
<b>Base Machine</b> <ul style="list-style-type: none"> <li>• Boom base</li> <li>• Gantry</li> <li>• Wire rope (Front / rear / boom hoist)</li> <li>• Without crawler</li> </ul>	 	27,000
<b>Base Machine</b> <ul style="list-style-type: none"> <li>• Gantry</li> <li>• Wire rope (Front / rear / boom hoist)</li> <li>• Without crawler</li> </ul>	 	24,940
Crawler	 	7,180

# PARTS AND ATTACHMENTS


## Base Machine

Boom base, Gantry, Crawler, Wire rope (Front/boom hoist)  
Weight: 41,360 kg Width: 3,500mm

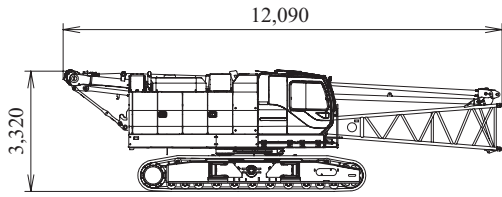


## Crawler

Weight: 7,180 kg

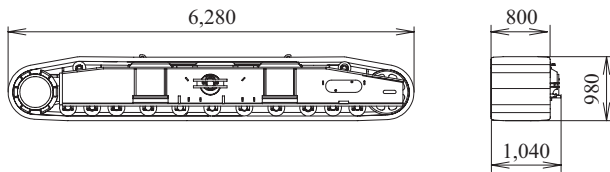


## Upper Jib

Weight: 180 kg



## Lower jib


Weight: 200 kg



## 3.0m (10ft)

### Jib insert


Weight: 100 kg



## 6.1m (20ft)


### Jib insert

Weight: 180 kg



## Strut


Weight: 250 kg

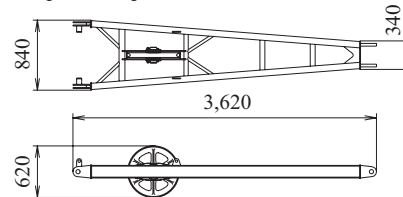

## Crane


### Backstop

Weight: 270 kg




## Counterweight No.1

Weight: 10,540 kg

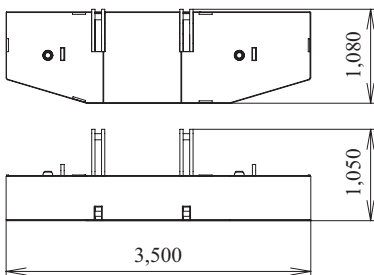


## Counterweight No.2

Weight: 9,930 kg

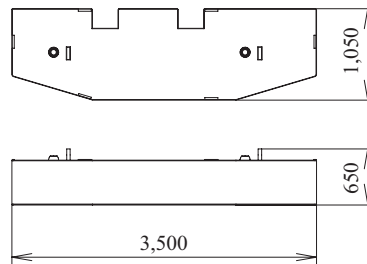


## Counterweight No.3

Weight: 8,250 kg

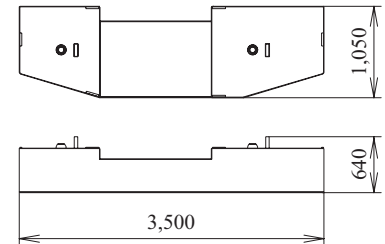


## Counterweight No.4 (L)

Weight: 1,280 kg




## Counterweight No.4 (R)

Weight: 1,900 kg




## Carbody weight


Weight: 7,200 kg




**Boom tip**  
Weight: 1,220 kg

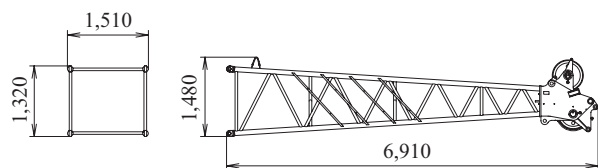


**Boom base**  
Weight: 1,120 kg

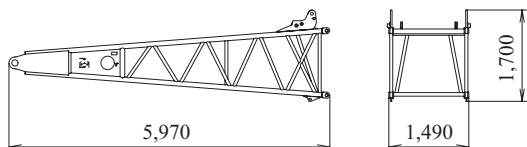


**3.0m (10ft)  
Boom insert**  
Weight: 300 kg

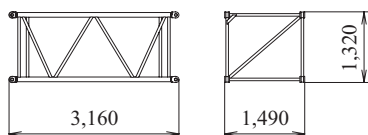


**6.1m (20ft)  
Boom insert**  
Weight: 510 kg

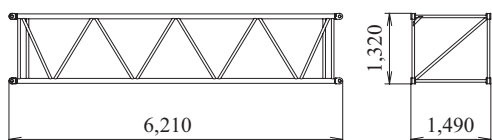


**12.2m (40ft)  
Insert Boom**  
Weight: 950 kg

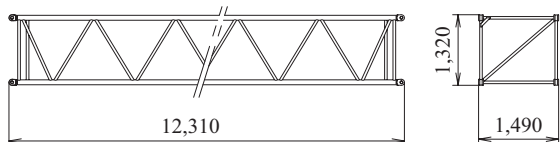


**12.2m (40ft)  
Boom insert (with lug)**  
Weight: 1,220 kg

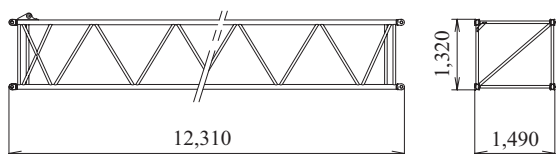


**Auxiliary sheave**  
Weight: 195 kg

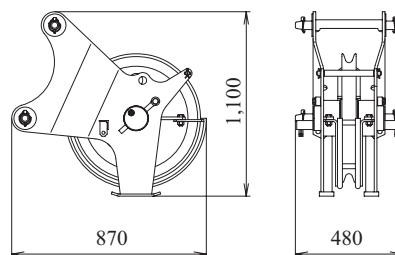


**Upper spreader**  
Weight: 280 kg

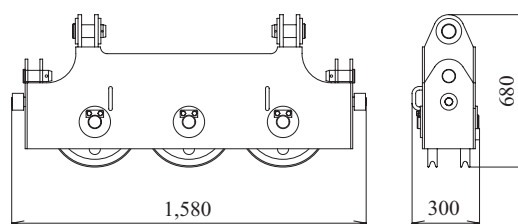


**Ball hook**  
Weight: 460 kg



**35t hook**  
Weight: 700 kg



**90t hook**  
Weight: 1,300 kg



Note: This catalog may contain photographs of machines with specifications, attachments and optional equipment not certified for operation in your country. Please consult KOBELCO for those items you may require. Due to our policy of continual product improvements all designs and specifications are subject to change without advance notice.

Copyright by KOBELCO CRANES CO., LTD. No part of this catalog may be reproduced in any manner without notice.



## **KOBELCO CRANES CO., LTD.**

17-1, Higashigotanda 2-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN

Tel: +81-3-5789-2130 Fax: +81-3-5789-3372

URL: <http://www.kobelco-cranes.com/>

Inquiries To: