


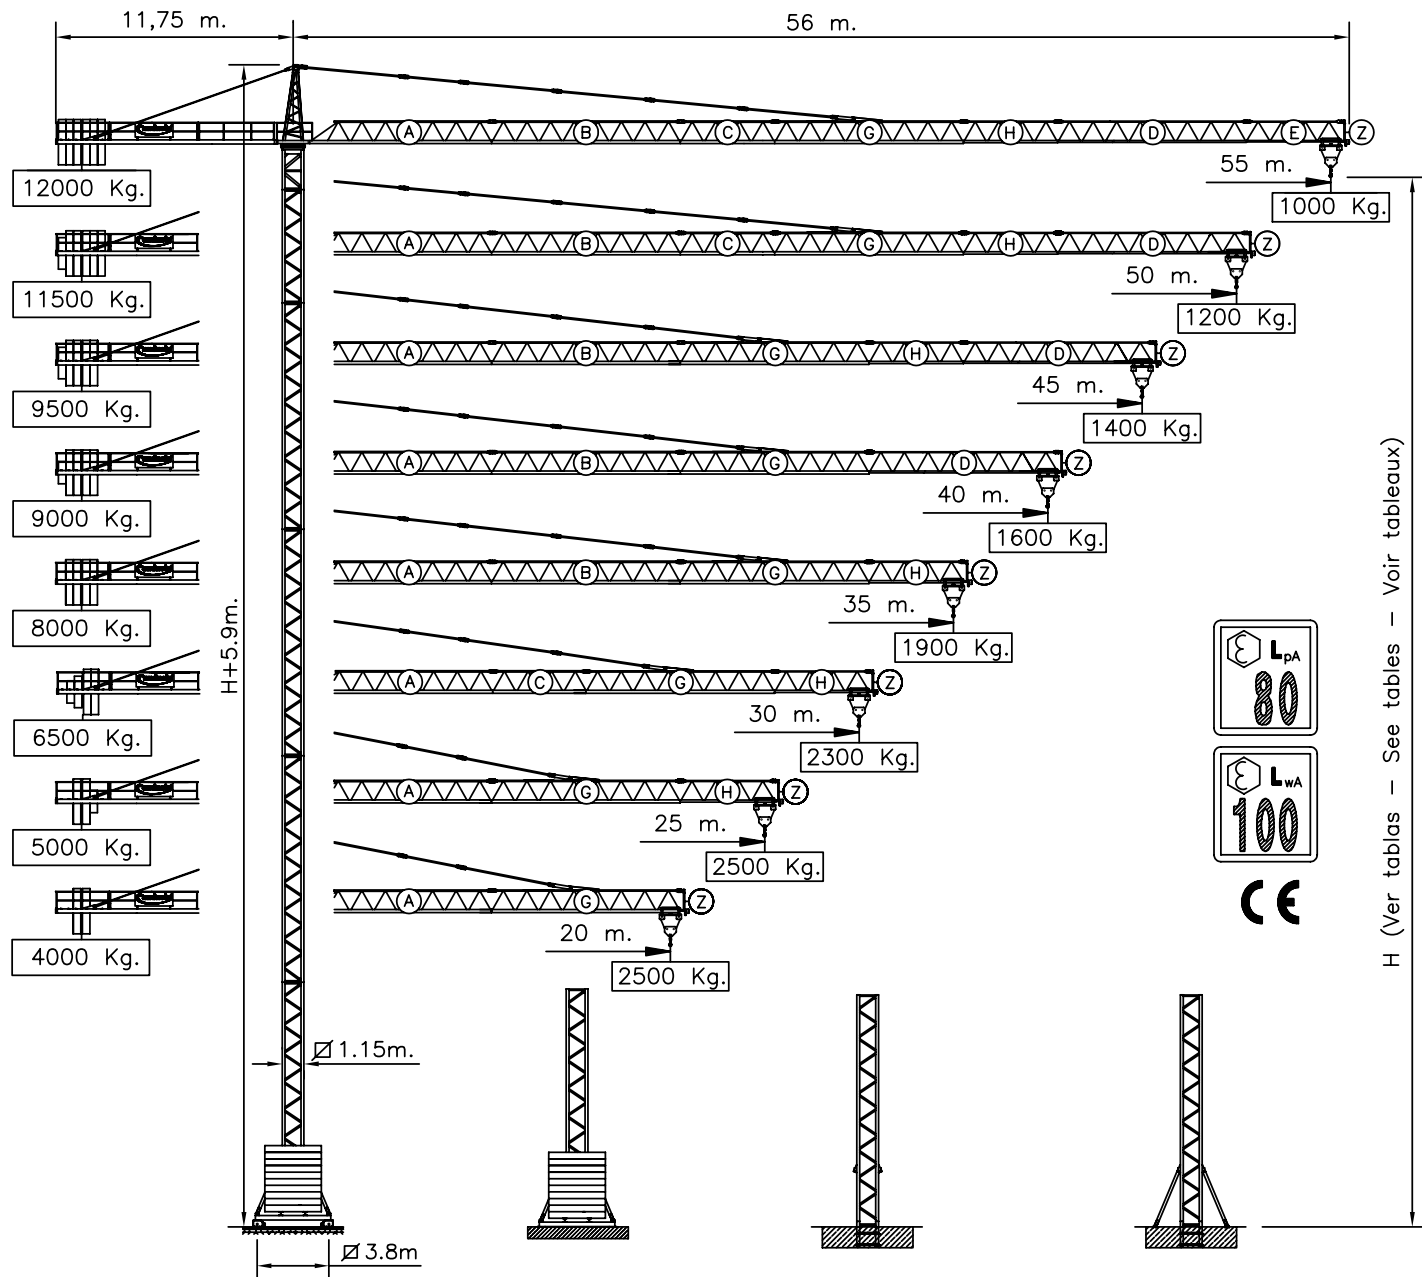

1

MOVIL
MOBILE
MOBILE

2

FIJA
STATIONARY
STATIONNAIRE

3

EMPOTRADA
EMBEDDED
ENCASTREE

4

CARACTERISTICAS-CHARACTERISTICS-CARACTERISTIQUES

Tensión de alimentación Operating voltage Tension de service	Peso de la grúa Weight of crane Poids de la grue	Lastre de base Base ballast Lest de base	Reacción máxima - Maximum reaction	
380 V. 3 ph 50 Hz.	25.1 Tn. (*)27.5 Tn.	52 Tn. (*)62.4 Tn.	En servicio In service En service	Fuera de servicio Out of service Hors service
			42.2 Tn. (*)49.2 Tn.	46.5 Tn. (*)59.3 Tn.



(*) Serie Alta - High Series - Serie Haute



15/15/3.7 K.W.	2500	2500	1250	Kg.
	8	35	70	m/min.

2.2 K.W. 0.....50 m/min.	2 x 45 Nm. 0.8 v.p.m.	2 x 2.2 K.W. 15 m/min.
-----------------------------	--------------------------	---------------------------

ALTURAS "H" SIN ARRIOSTRAR - HEIGHTS "H" WITHOUT BRACING - HAUTEURS "H" SANS JAMBE DE FORCE

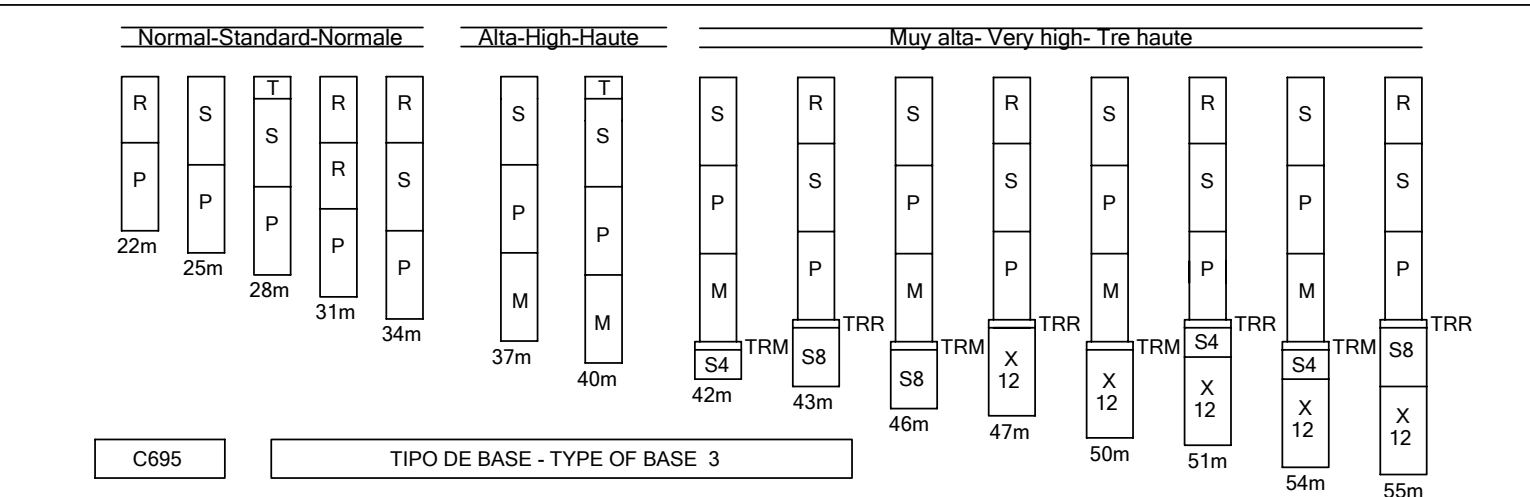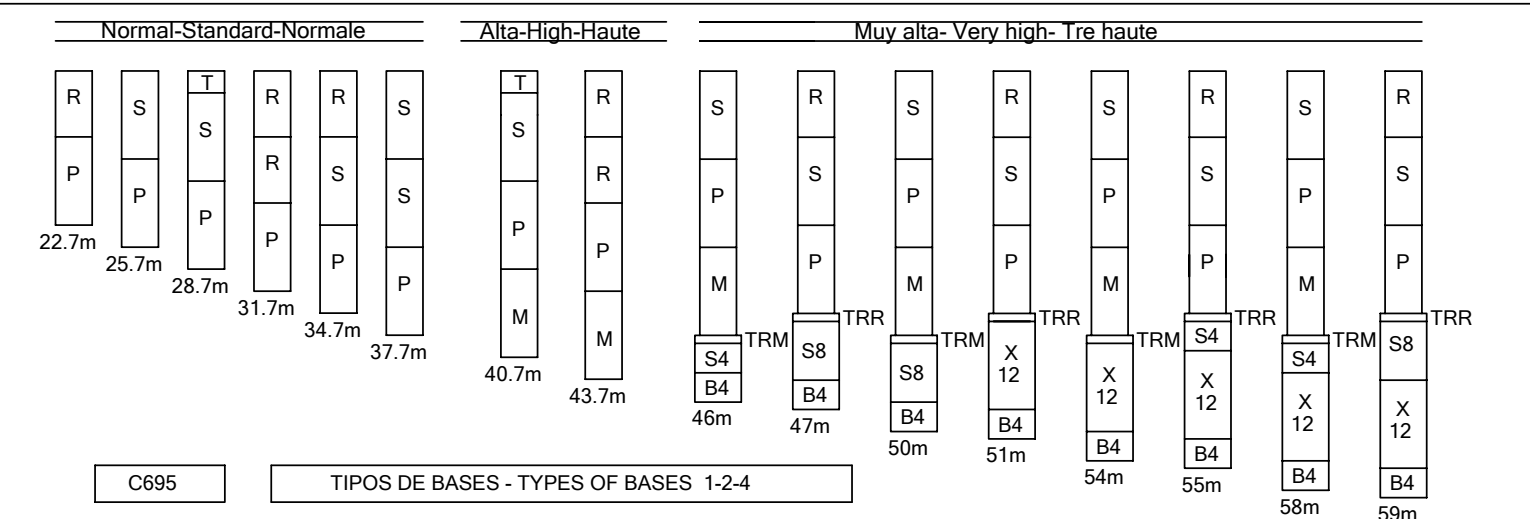

M - P - S - S12 - X12	= LONGITUD - LENGTH - LONGITUDE 12 m.
R	= LONGITUD - LENGTH - LONGITUDE 9 m.
S8	= LONGITUD - LENGTH - LONGITUDE 8 m.
S4 - B4	= LONGITUD - LENGTH - LONGITUDE 4 m.
T	= LONGITUD - LENGTH - LONGITUDE 3 m.

ALCANCES Y CARGAS - RADIUS AND CAPACITY - PORTEES ET CHARGES									
	2.2 - 24	30	35	40	45	50	55	m.	
55 m.	2500	2000	1700	1450	1300	1120	1000	Kg.	
	2.2 - 26	30	35	40	45	50	m.		
50 m.	2500	2130	1800	1550	1350	1200	Kg.		
	2.2 - 26	30	35	40	45	m.			
45 m.	2500	2200	1850	1600	1400	Kg.			
	2.2 - 26	30	35	40	m.				
40 m.	2500	2200	1850	1600	Kg.				
	2.2 - 27	30	35	m.					
35 m.	2500	2250	1900	Kg.					
	2.2 - 27	30	m.						
30 m.	2500	2300	Kg.						
	2.2 - 25	m.							
25 m.	2500	Kg.							
	2.2 - 20	m.							
20 m.	2500	Kg.							

Reserva de modificaciones - Subject to modifications - Modifications reserves

01/05



Teléfono: 902 199 783
Fax: 902 199 784
<http://www.gruascanduela.com>