

Product advantages

Mobile crane LTM 1030/2



Max. lifting capacity: 35 t at 3 m radius

Max. height under hook: 45 m with biparted swing-away jib

Max. radius: 40 m with biparted swing-away jib




Performance profile of the LTM 1030/2 at a glance.

- 24 t total weight, incl. 2.5 t counterweight, 15 m biparted swing-away jib, 14-size tyres, and 22.4 t hook block (axle load 2 x 12 t)
- Outstanding range of lifting capacities, counterweight variants 5.5 t and 2.5 t
- Modern 205 kW/278 h.p. Mercedes-Benz 6-cylinder in-line Diesel engine with exhaust gas turbo-charger and charge cooling (EURO III), fully electronic engine management
- Liebherr-System-Bus (LSB) for data transfer, e.g. for the engine and transmission management as well as for the vehicle electric system
- Compact and manoeuvrable due to all-wheel drive and all-wheel steering, smallest turning radius 6.3 m across vehicle
- Travelling control and setting on outriggers from crane cab - standard features
- Load-sensing system for optimized crane control
- 4-section telescopic boom of maximum stability, length 9.2 m - 30 m, and 8.6 - 15 m long biparted swing-away jib for heights under hook of up to 45 m and radii of up to 40 m
- LICCON, the most modern crane computer system world-wide, with comprehensive informative, monitoring and control functions
- Slewing rim, slewing gear, winch and hydraulic pump are self-manufactured, quality checked components
- Quality assurance system according to DIN ISO 9001

LIEBHERR


The better crane.

CD-

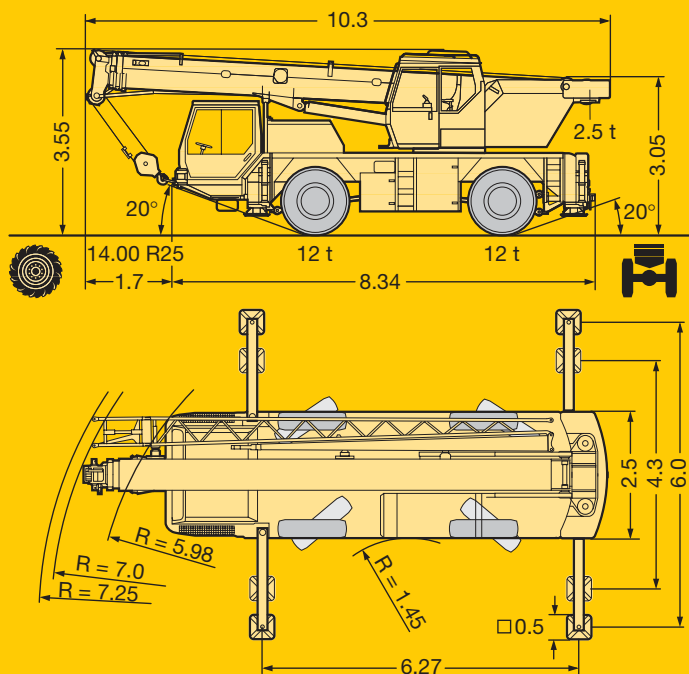

Compact, manoeuvrable and weight-optimized.

- Overall length 10.3 m only, length of carrier just 8.38 m only, overall height without cab upper section 2.95 m (vehicle in lowered condition)
- Large overhang angles of up to 21° (tyre equipment 16.00 R 25)
- Small turning radius of 7,3 m due to all-wheel steering
- 24 t total weight, incl. 2.5 t counterweight, 14-size tyres, 15 m biparted swing-away jib, drive 4 x 4 and 21.7 t hook block (axle load 2 x 12 t)
- 2 optional tyre sizes
 - 14.00 R 25 - vehicle width 2.5 m
 - 16.00 R 25 - vehicle width 2.5 m


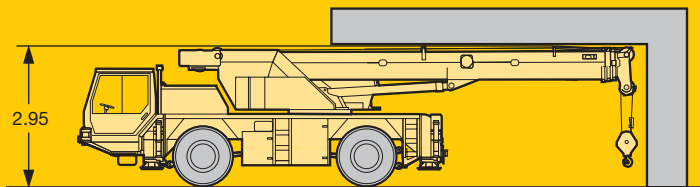


Minimum overall height.

- By detachable cab upper section (by means of mechanical dismantling device)
- By lowering the crane by 100 mm with the aid of the „Niveaumatik“ suspension

Activating/locking suspension and levelling vehicle by the „Niveaumatik“.

- Raising the crane by 100 mm to improve the fording ability
- Lowering the crane by 100 mm to reduce the overhead clearance
- 100 mm more space between supporting pads and ground for setting crane on outriggers
- Raising front or rear of carrier to increase overhang angles
- Lateral inclination of crane up to 2 x 7.6° for negotiating slopes
- Automatic level adjustment of axles for road travel by a switch in the driving cab
- Axle load equalization

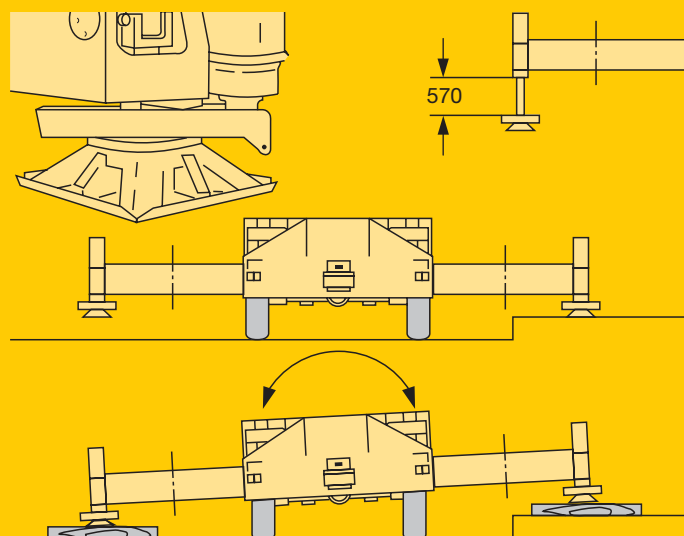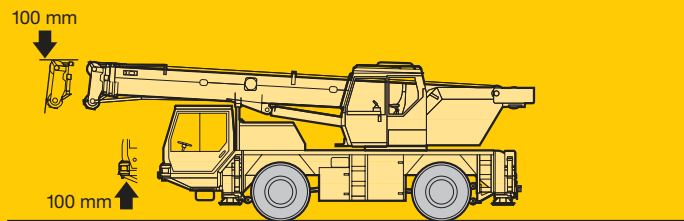

Setting crane on outriggers - quick, convenient and safe.

- Variable supporting basis
 - Outriggers retracted
 - Supporting basis 6.3 m longitudinally x 4.3 m transversely
 - Supporting basis 6.3 m longitudinally x 6 m transversely
- Fixed supporting pads, protected by splash guards
- Travel of supporting rams 570 mm
- Supporting pads 500 mm, weight 20 kg
- Time for lowering supporting rams approx. 40 s
- 2 x 7.6° lateral inclination of carrier and crane superstructure, also at locked suspension
- Illuminated and dirt-protected reflecting levels
- Operation of outrigger system in accordance with the rules for the prevention of accidents

The LTM 1030/2 - top-class engineering by Liebherr.

Torsional rigid telescopic boom.

- Oviform cross-sectional boom profile, multi-folded design, buckling-proof and torsional rigid, of excellent guiding quality
- Maintenance-free polyamide slide pads of telescopes
- First-rate lifting capacities, e.g.
 - 8.0 t at 10 m radius
 - 3.1 t at 10 m radius, free on wheels
 - 2.9 t at 20 m radius
 - 1.4 t at 30 m radius
 - 0.5 t at 40 m radius

Wide comfortable driving cab.


- Two-seated comfortable driving cab, corrosion-proof structural steel design, dip-primed and entirely powder-coated, front section mounted on rubber shock absorbers, rear section on hydraulic dampers
- Safety glass all around
- Air-cushioned driver's seat with pneumatic lumbar support, co-driver's seat air-cushioned
- Steering wheel adjustable in height and inclination, heatable and electrically adjustable exterior mirrors
- Standardized and ergonomically located operating and control elements, equally for the „Niveaumatik“ suspension

Spacious crane cab with armrest-integrated control levers.

- Galvanized crane cab, tinted panes all around, front knockout window with large parallel windscreen wiper, large skylight of bullet-proof glas with large segmental windscreen wiper and roller blind, space saving sliding door
- Operator's seat with pneumatic lumbar support and headrest
- Convenient armrest-integrated control elements, vertically adjustable master switch consoles and armrests, ergonomically inclined operating consoles
- Steering operation by means of flip switch
- Sound and heat insulated internal panelling, an auxiliary heating is part of the standard equipment
- LICCON computer system with monitor

Liebherr components – reliable and easy-to-service.

- Slewing rim, slewing gear, winch and axial piston variable displacement pump are self-produced Liebherr components, specially matched for the application in mobile cranes
- Centralized lubricating system for slewing rim, boom bearing application and bearings of winches and luffing ram

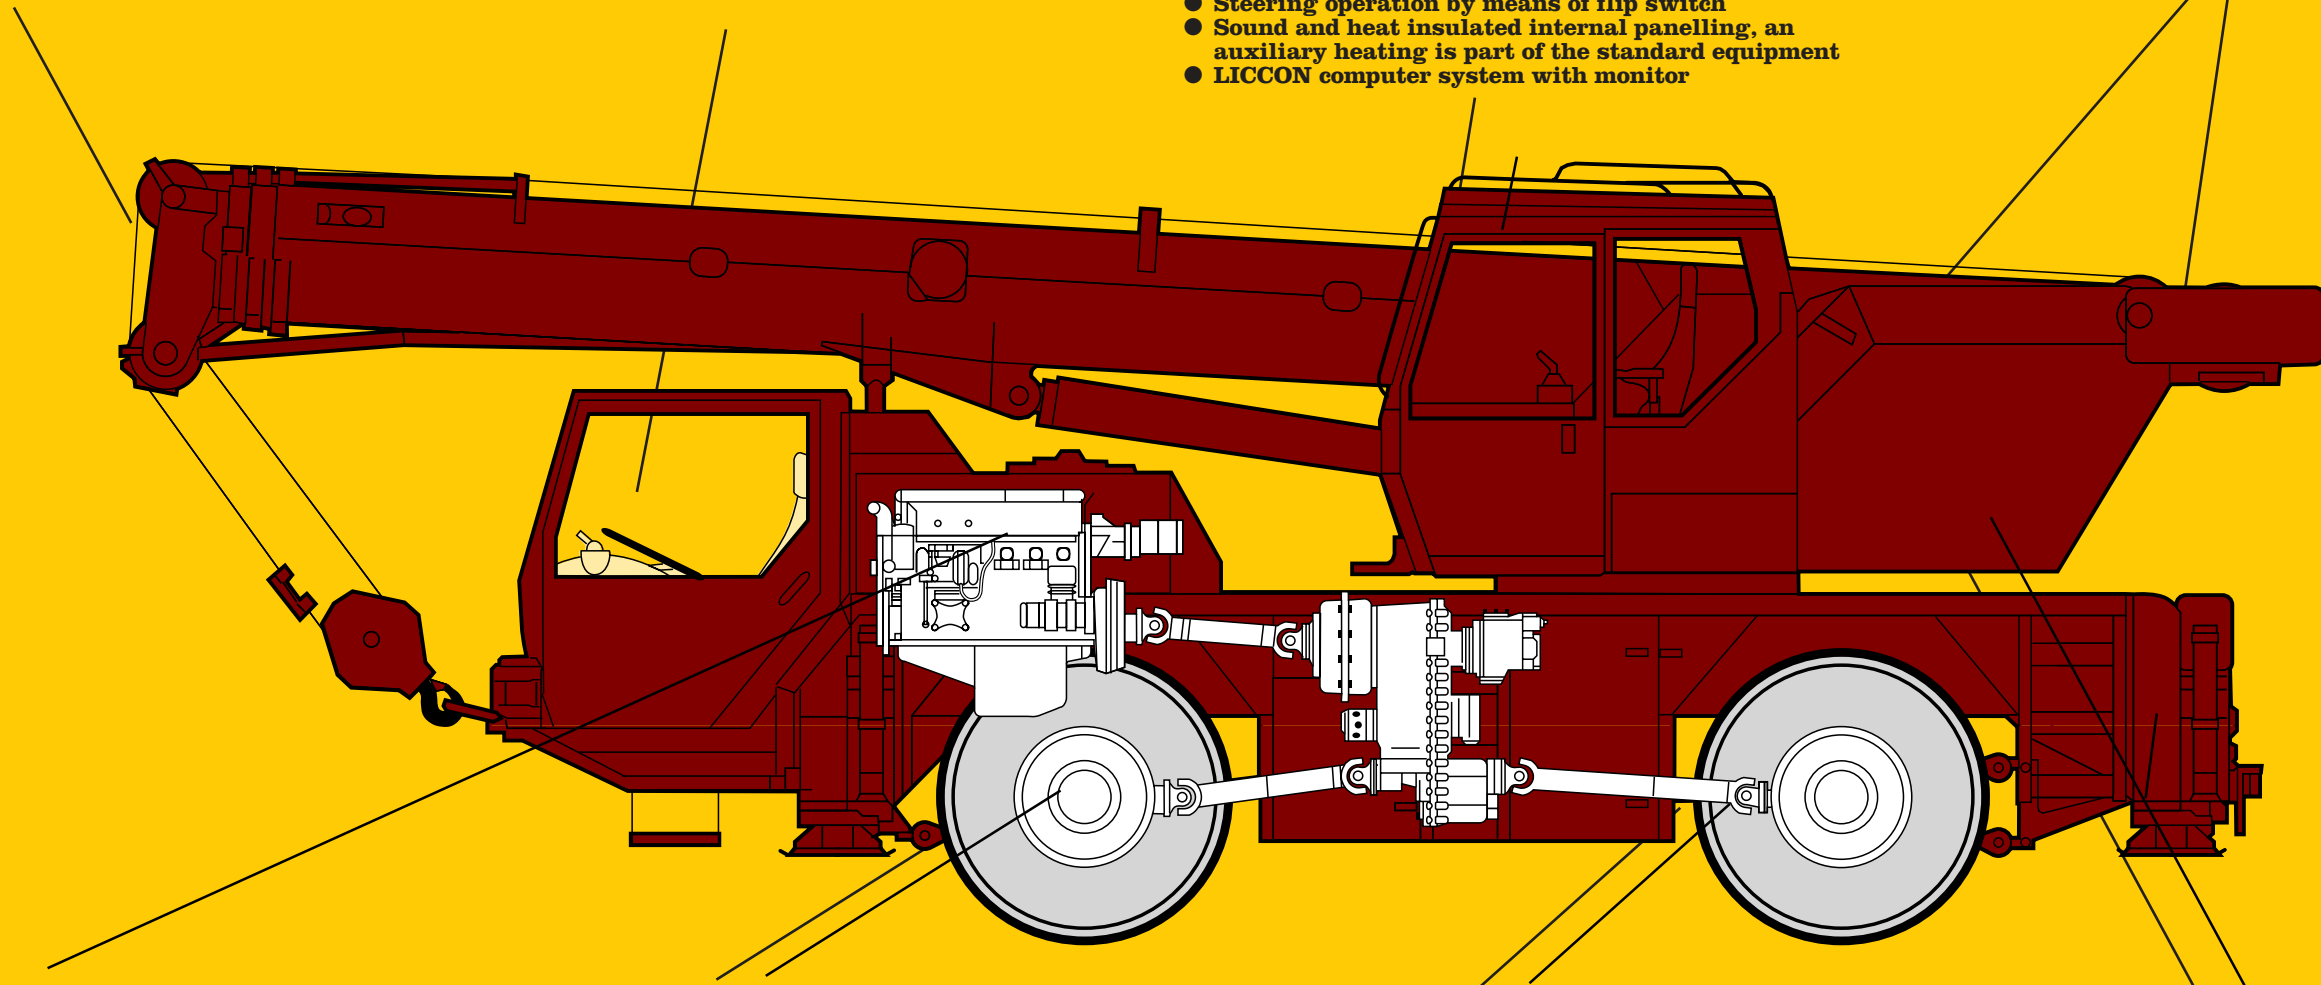

Modern and powerful carrier drive.

- Water-cooled Mercedes-Benz 6-cylinder in-line Diesel engine with exhaust gas turbo-charger and charge cooling (EURO III), with fully electronic engine management
- ZF power shift gear type 6 WG 210 with torque converter and automatic control and electronic engine management, 6 forward, 2 reverse speeds and rough-terrain ratio
- Max. driving speed 80 km/h, max. gradability 60 %
- Liebherr axial piston variable displacement pump controlled by the power shift gear, activatable for the crane drive

Outstanding carrier technology for on-road and off-road application.

- Weight-optimized axles, almost maintenance-free, made of high-tensile steel, perfect track keeping and lateral stability due to special control linkage arrangement
- Drive 4 x 4, only the rear axle is driven for on-road displacement, front axle activatable for off-road operation
- The maintenance-free steering knuckles are steel and rubber mounted
- The perfected and robust axles are manufactured in large series and are troublefree components
- The cardan shafts are maintenance-free; easy and quick fitting of the cardan shafts due to 70° diagonal toothing and 4 fixing screws

Niveaumatik suspension – preserving crane and roads.

- Maintenance-free suspension rams, free from lateral forces, protected by synthetic tubes
- Level position (suspension on „travelling mode“) can be activated automatically by push-button control from any position
- Stable cornering ability due to cross mounting of the hydropneumatic suspension
- Axle locking system (locking of suspension for travelling with load) controlled from the driving cab

Weight-optimized steel structure.

- Carrier, superstructure and telescopic boom in light-gauge design, calculated by the FEM method, weight-optimized and of maximum torsional rigidity
- Tensile property of material with high safety factors through the application of STE 960 (960 N/mm²) for all supporting members such as telescopic boom, superstructure frame and outrigger system

Handling of loads – precise and safe.

- 4-section, 30 m long telescopic boom and 8.6 m - 15 m long biparted swing-away jib for 45 m height under hook and 40 m radius
- The LICCON system calculates the optimal load curve at any boom length
- Swing-away jib mountable at 0°, 20° or 40°
- Hydraulic rigging aid for swing-away jib



Proved hydromechanic telescoping system.

- Reliable, single-stage, double-acting hydraulic ram
- Low gravity center of boom due to twin block and tackle for 2nd and 4th boom step
- Telescopes equipped with wear-resistant polyamide bearing pads
- Oviform cross-sectional boom profile





LICCON computer with SLI and test system.

- Setting of crane configuration by convenient conversational-mode functions
- Reliable acknowledgement of crane configuration set
- Representation of all essential data by graphic symbols within the operation image
- Reliable cut-off device when exceeding the premissible load moments
- Safe load values for any boom intermediate length
- Winch indications for load hook course with zero adjuster for ultra-precise lifting/lowering
- Test system for servicing including facility to check all sensors and consumers connected to the system on the display screen

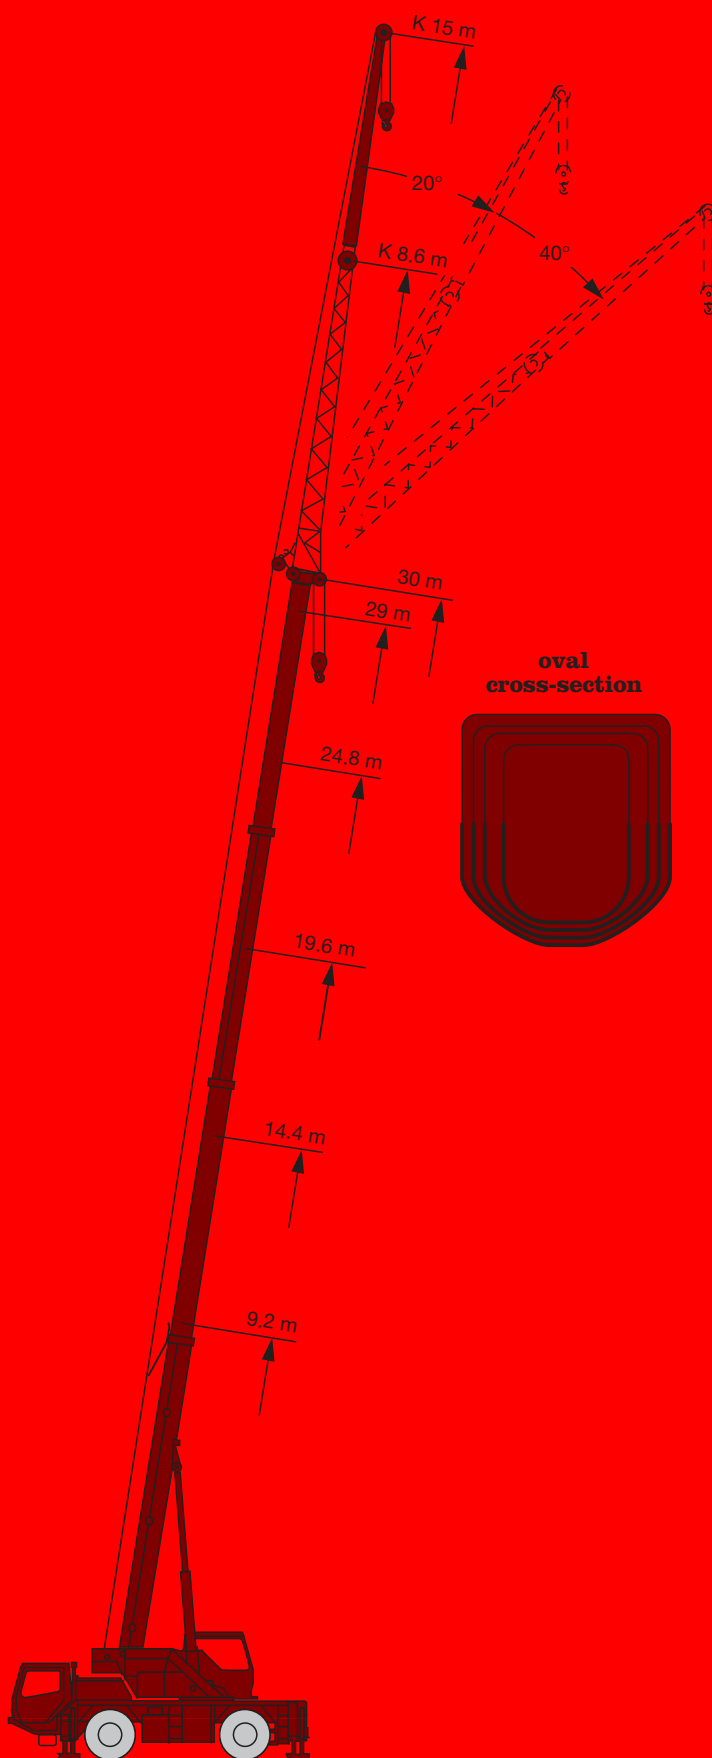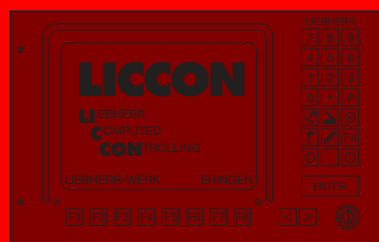


Mounting of counterweight - just a matter of minutes.

- Counterweight variants: 2.5 t and 5.5 t
- Ballasting controlled from crane cab

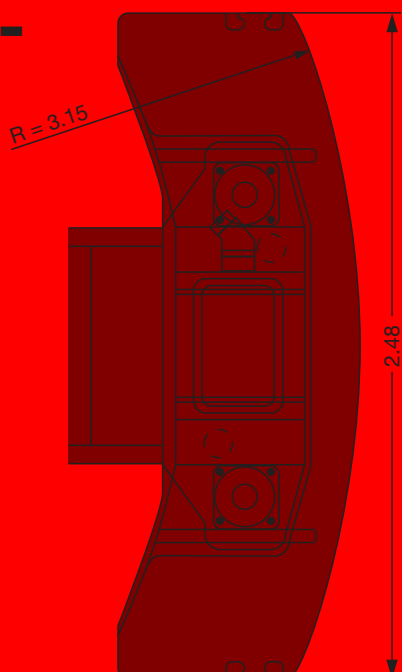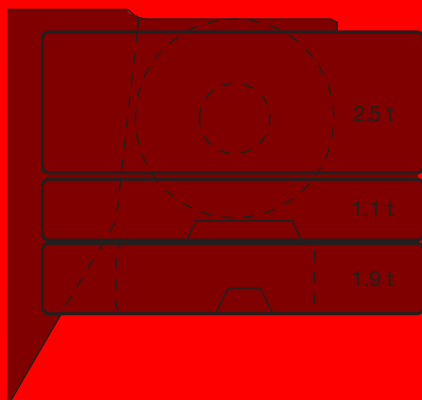

Crane control with load sensing system.

- Sensitive control of 4 working motions independent of one another
- Energy saving as the variable displacement pump only delivers the oil volume required
- Without high-speed activation, the entire oil volume can be directed to one single consumer, e.g. to increase the working speed
- The hydraulic system is perfectly accessible and easy-to-service due to its modular design
- The all-hydraulic control with the „Load Sensing System“ warrants an outstandingly sensitive and precise handling of the load

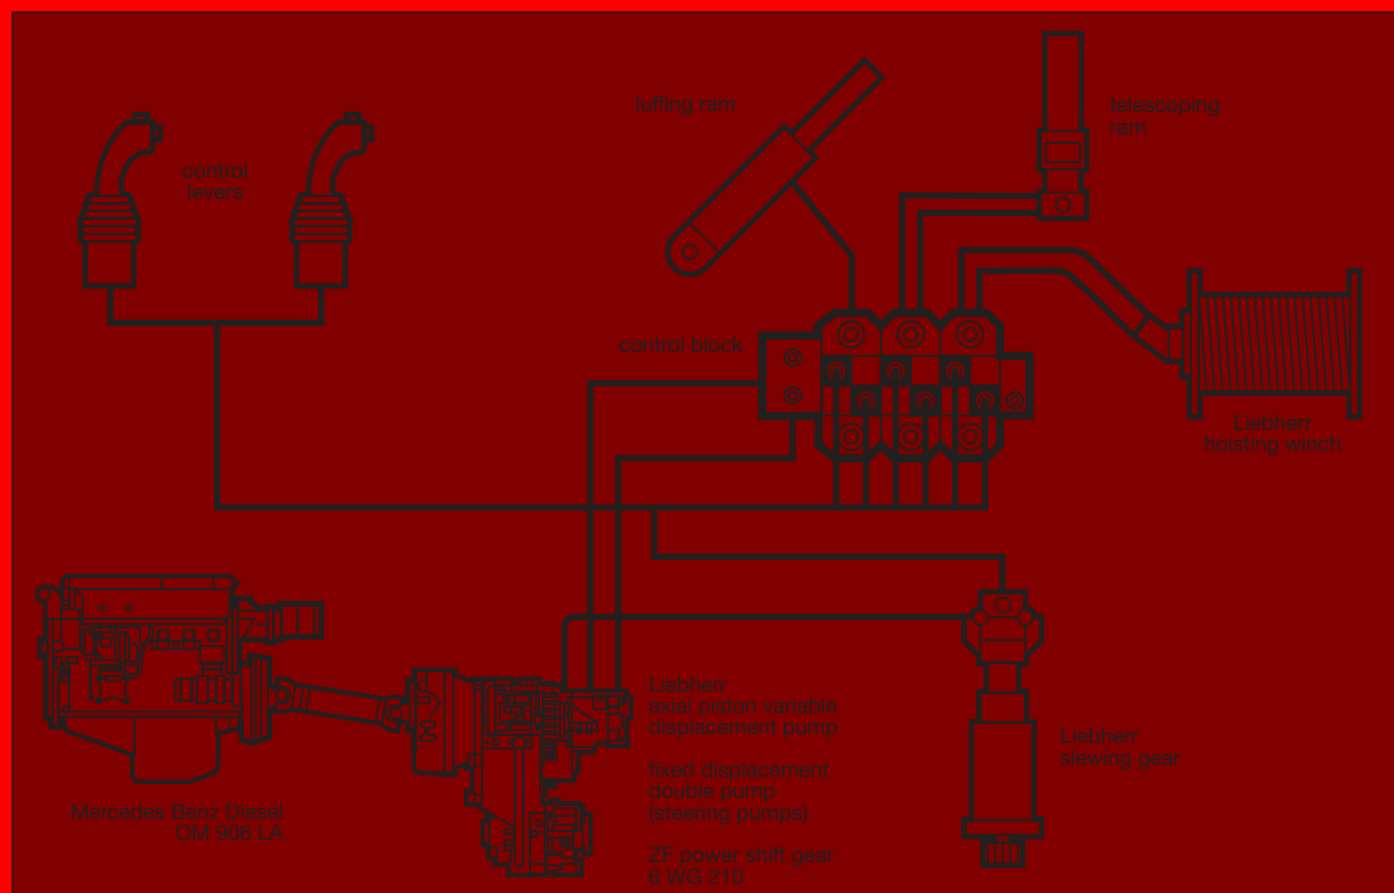

Subject to modification.

TP 266. 4.97

Please contact

LIEBHERR-WERK EHINGEN GMBH

D-89582 Ehingen/Donau, Phone (0 73 91) 5 02-0, Telefax (0 73 91) 5 02-33 99

www.lwe.liebherr.de, E-mail: info@lwe.liebherr.com

CD-