




塔帽式塔式起重机 设备配置与技术参数

QTZ63(TC5013A)

本数据仅供参考，如有更改，恕不另行通知

This data is for informational purposes only, and is subject to change without prior notice


外形尺寸 Outline Dimensions

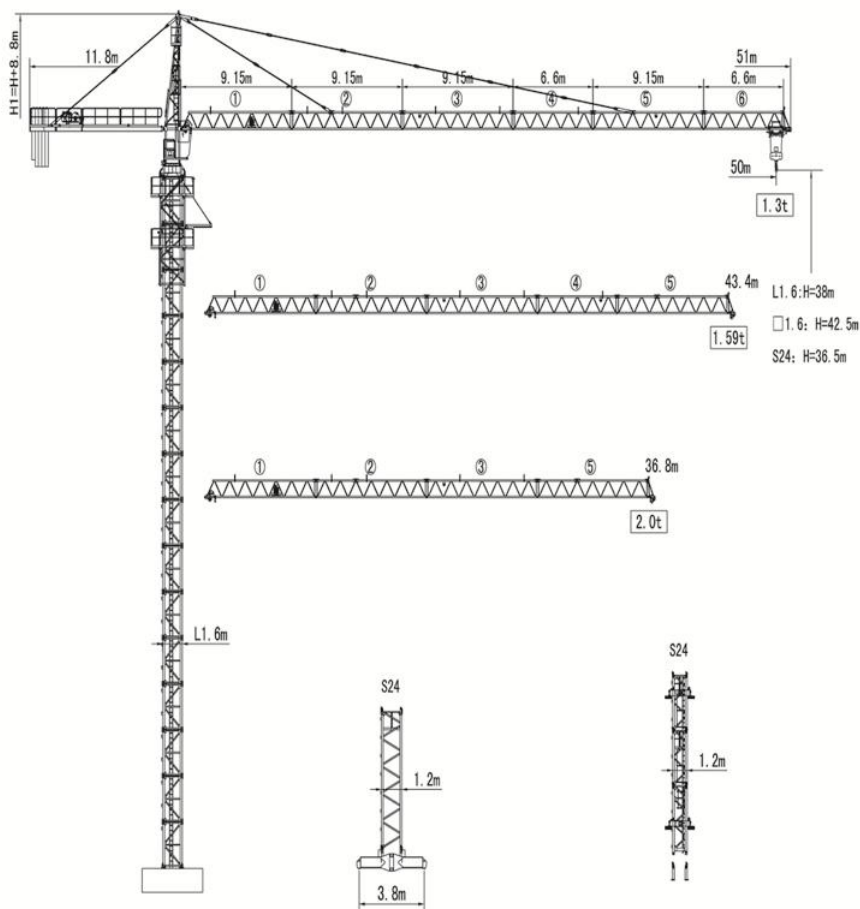

载荷特性表 Load Diagrams 5t

R(m)	Fall	$R_{C(max)}$	$C_{max}(t)$	15	20	25	30	35	36.8	40	43.4	45	50
50m		16.2	5.0	5.0	3.94	3.04	2.41	2.01	1.89	1.70	1.53	1.45	1.26
		29.5	2.5	2.5	2.5	2.5	2.45	2.04	1.92	1.73	1.56	1.49	1.3
43.4m		16.5	5.0	5.0	4.01	3.1	2.48	2.05	1.93	1.74	1.56		
		30	2.5	2.5	2.5	2.5	2.5	2.08	1.96	1.77	1.59		
36.8m		16.8	5.0	5.0	4.09	3.16	2.54	2.1	1.97				
		30.5	2.5	2.5	2.5	2.5	2.5	2.12	2.0				

塔身截面 Masts

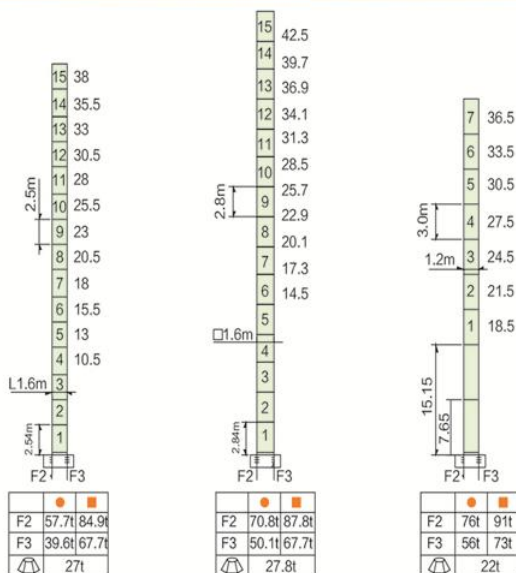


● 工作状态支反力 Reactions in service

■ 非工作状态支反力 Reactions out of service



⚖ 不含平衡重及压重塔机重量 Total weight of free standing crane (exclude Counter weight & ballast)

附着位置及塔机高度 Anchorage

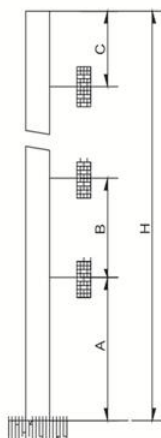

Mast	A	B	C	H
L1.6	28.8m	17.5m	24m	140m >140m*
□1.6	32.2m	19.6m	27m	140m >140m*
S24	31.6m	15m	20.8m	140m >140m*

附着道数: Number of tie collar=(H-A-C)/B+1

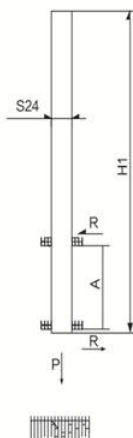

	H1	A	R	P
S24	30.7m	7-15m	12.5t	38t

机构 Mechanisms 5t

名 称	机构代号	工作速度（m/min）		起重量(t)	容绳量(m)	电机功率
起升 Hoisting	18JLD13☆	双绳 2 fall	10	2.5	280 >280*	18/18/5
			30	2.5		
			60	1.25		
		四绳 4 fall	5	5.0		
			15	5.0		
			30	2.5		
	15LVF13	双绳 2 fall	0~30	2.5	220 >220*	15
			0~60	1.25		
		四绳 4 fall	0~15	5.0		
			0~30	2.5		
变幅机构 Trolleying	BE2450 ☆	40/20				2.4/1.5
	BP4060X	0~40				4
回转机构 Slewing	HR.100.180☆	0~0.6				5.5
	RVF4	0~0.6				4
电源 Power	380V（±10%）/50Hz*					

*请与制造商联系 contact us please

☆标准配置 standamrd configuration

平衡重 Counter weight

			PHZ2350	PHZ1200
50m	11.18m	10600	4	1
43.4m	11.18m	9400	4	
36.8m	11.18m	8250	3	1



山东大汉建设机械股份有限公司

地址：山东省济南市章丘区明水经济开发区赭山工业园

电话：+86 (531) 83260789

网址：www.dhtj.com

邮编：250200

Shandong Dahan Construction Machinery Co.,Ltd.

Add：Zheshan Industrial Part,Mingshui Development

Zone,Zhangqiu,Jinan City,Shandong Province,China

TEL：+86 (531) 83260789

Web：http:// www.dhtj.com

ZIP CODE：250200