


永茂建机
YONGMAO

ST60/23
10t

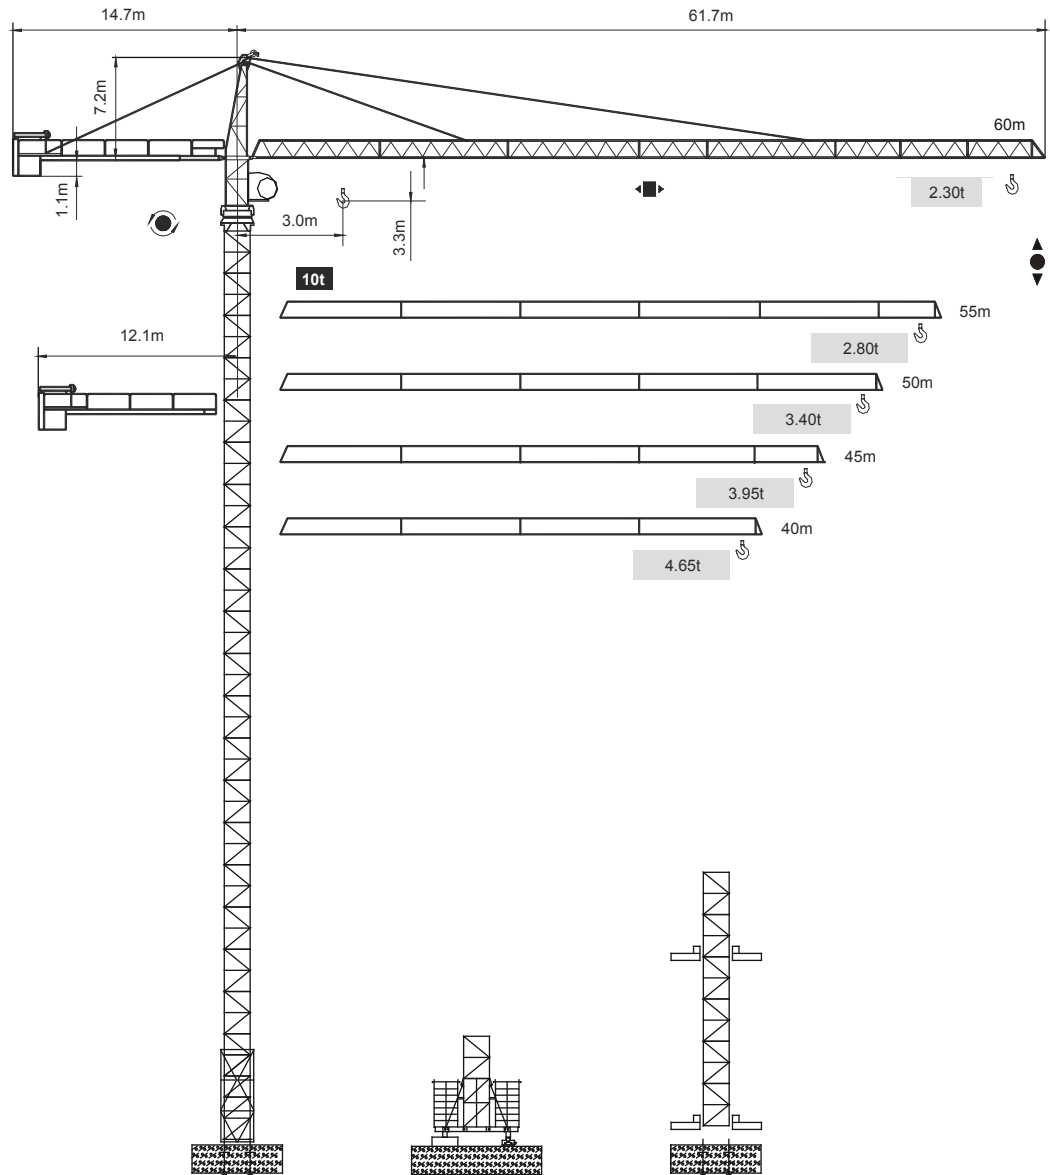

CE FEM

Topkit

V 5.0-09112014

塔帽系列

1 3 1
1 3 2



Topkit ST60/23

Topkit ST60/23

ST60/23
10t

載荷表 Load Chart

		V-10-A(B)-1-V1.0										
R (m)	倍率 Fall	R (C _{max}) (m)	C _{max} (t)	20	25	30	35	40	45	50	55	60
60	U	16.67	10.00	8.09	6.16	4.87	3.97	3.30	2.80	2.40	2.05	1.80
	L	31.50	5.00	5.00	5.00	5.00	4.47	3.80	3.30	2.90	2.55	2.30
55	U	17.83	10.00	8.73	7.04	5.18	4.36	3.63	3.09	2.65	2.30	
	L	34.00	5.00	5.00	5.00	5.00	4.83	4.13	3.58	3.15	2.80	
50	U	18.90	10.00	9.36	7.16	5.28	4.71	3.94	3.36	2.90		
	L	36.00	5.00	5.00	5.00	5.00	5.00	4.40	3.86	3.40		
45	U	19.23	10.00	9.55	7.32	5.34	4.82	4.04	3.45			
	L	37.00	5.00	5.00	5.00	5.00	5.00	4.54	3.95			
40	U	19.60	10.00	9.76	7.48	5.53	4.94	4.15				
	L	37.50	5.00	5.00	5.00	5.00	5.00	4.65				

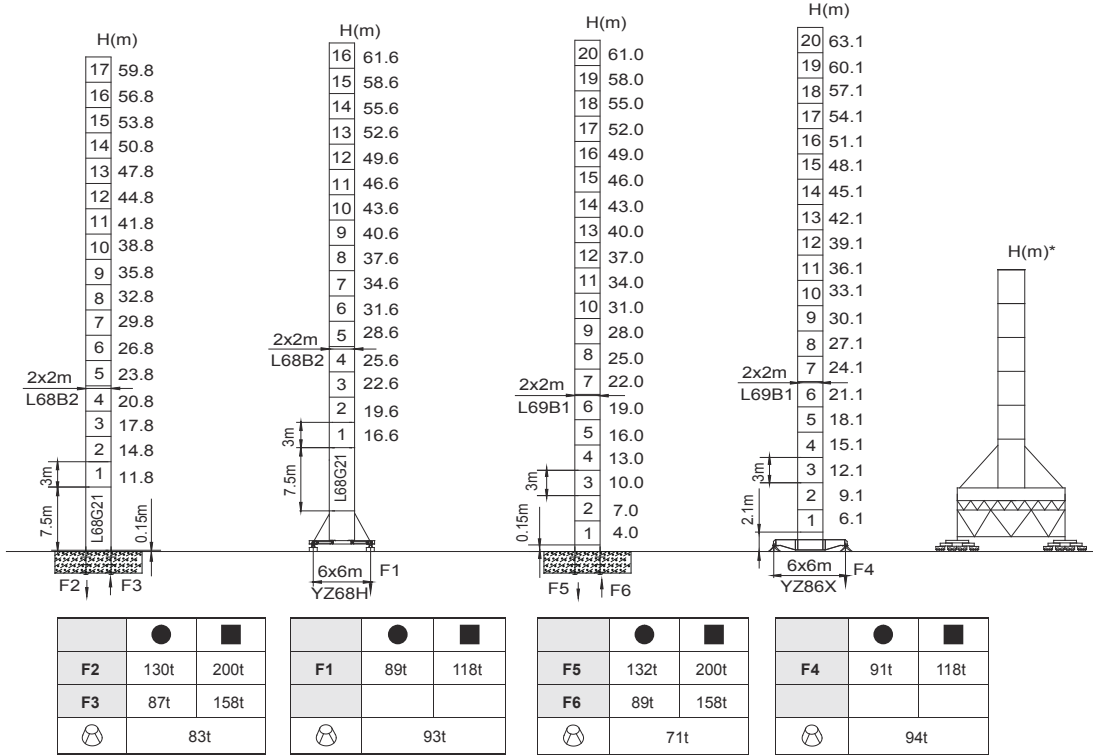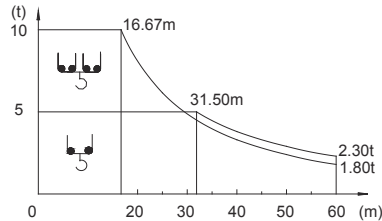

	●	■
F2	130t	200t
F3	87t	158t
⊗	83t	

	●	■
F1	89t	118t
⊗	93t	

	●	■
F5	132t	200t
F6	89t	158t
⊗	71t	

	●	■
F4	91t	118t
⊗	94t	

● 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
⊗ 整機自由高度重量 (不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

Topkit ST60/23

控永
股茂

YONGMAO HOLDINGS LIMITED


控永
股茂

YONGMAO HOLDINGS LIMITED


ST60/23

10t



塔帽系列

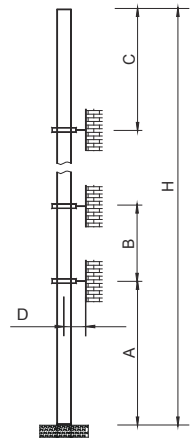

塔身節 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
L68B2	45.0	36.0	44.8	>3.6	250 >250*
L69B1	49.5	36.0	47.7	>3.5	250 >250*

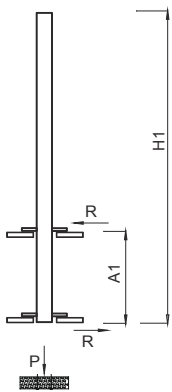

內爬框外廓尺寸
Overall dimensions of the internal climbing frame



內爬開口尺寸
Dimensions of the internal climbing opening

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
L68B2	54.6	16	85	25	2.58	2.17	2.78	3.29
L69B1	51.9	12.0	80	31.5	*	*	*	*

附著道數 Number of tie collars=(H-A-C)/B+1

超過100m高度，需降低載荷，請與公司聯繫。

Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.

主要性能參數 Specifications

機構 Mechanism							電動機 Motor kW
		m/min	t	m/min	t		
	37SWR25 ☆	0—40 0—80	5.0 2.5	0—20 0—40	10.0 5.0	500m	37
	45LFV25	0—40 0—48 0—80	5.0 4.0 1.5	0—20 0—24 0—40	10.0 8.0 3.0	500m	45
	55LFV25	0—45 0—54 0—90	5.0 4.0 1.5	0—22.5 0—27 0—45	10.0 8.0 3.0	1090m >1090m *	55
	DTC95	0—57 m/min					95 N.m
	YMD50 ☆	0—0.7 rpm					2 x 5
	RTC240	0—0.7 rpm					2x120 N.m
	RT	12.5—25 m/min					4x 2.6/5.2

供電容量 Power supply	kVA		
380V (±10%) 50 Hz	37SWR25: 60	45LFV25: 70	55LFV25: 85

* 與製造商聯繫 Contact us, please.

☆ 标准配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。

These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



YONGMAO HOLDINGS LIMITED

Topkit ST60/23

Topkit ST60/23

1 1
3 3
3 4