


永茂建机
YONGMAO

STL203C
10/12t

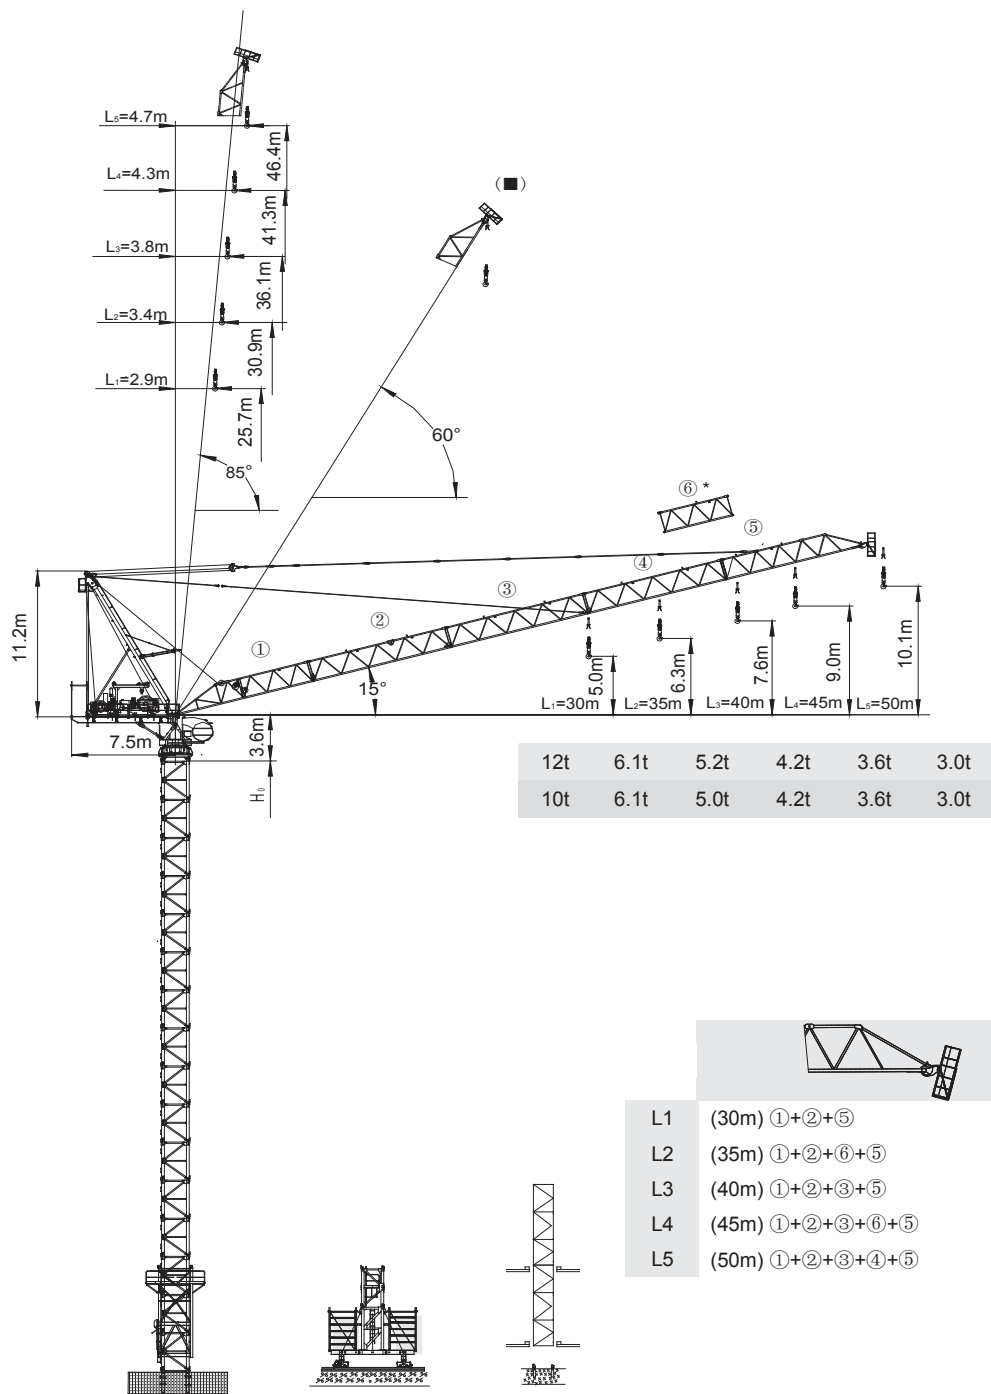

CE FEM

Luffing

V 3.0-07012012

動臂系列

1 1
8 9
9 0


Luffing STL203C
Luffing STL203C

STL203C
10/12t

載荷表 Load Chart


12t

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	20	25	30	35	40	45	50
50	1	30.0	6.0	6.0	6.0	6.0	5.0	4.1	3.4	3.0
	2	17.1	12.0	9.9	7.5	5.9	4.8	3.9	3.2	2.7
45	1	30.0	6.0	6.0	6.0	6.0	5.0	4.2	3.6	
	2	17.1	12.0	9.9	7.5	5.9	4.8	4.0	3.4	
40	1	30.0	6.0	6.0	6.0	6.0	5.0	4.2		
	2	17.1	12.0	9.9	7.5	5.9	4.8	4.0		
35	1	30.0	6.0	6.0	6.0	6.0	5.2			
	2	17.1	12.0	10.0	7.6	6.1	5.0			
30	1	30.0	6.0	6.0	6.0	6.0	6.0			
	2	17.1	12.0	10.0	7.6	6.1				




10t

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	20	25	30	35	40	45	50
50	1	35.0	5.0	5.0	5.0	5.0	5.0	4.1	3.4	3.0
	2	19.8	10.0	9.9	7.5	5.9	4.8	3.9	3.2	2.7
45	1	35.0	5.0	5.0	5.0	5.0	5.0	4.2	3.6	
	2	19.8	10.0	9.9	7.5	5.9	4.8	4.0	3.4	
40	1	35.0	5.0	5.0	5.0	5.0	5.0	4.2		
	2	19.8	10.0	9.9	7.5	5.9	4.8	4.0		
35	1	35.0	5.0	5.0	5.0	5.0	5.0	5.0		
	2	19.8	10.0	10.0	7.6	6.1	5.0			
30	1	35.0	5.0	5.0	5.0	5.0	5.0			
	2	19.8	10.0	10.0	7.6	6.1				



- 工作狀態支反力
In service reaction
- 非工作狀態支反力
Out of service reaction
- ⊗ 整機自由高度重量 (不含平衡重及壓重重量)
Total weight of free standing crane (excludes counter weight & ballast.)

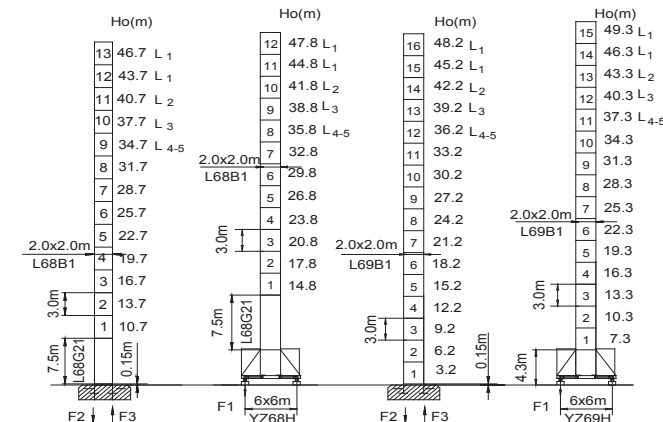

F2	124t	179t
F3	169t	218t
⊗	76t	

F1	101t	103t
⊗	90t	

F2	194t	223t
F3	143t	194t
⊗	78.5t	

F1	104t	105t
⊗	92.5t	

Luffing STL203C





YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED

STL203C
10/12t

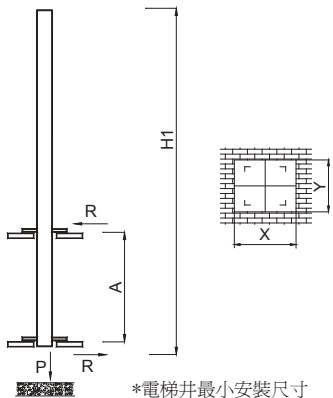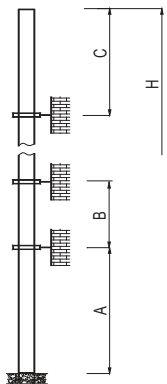

*電梯井最小安裝尺寸
Min.installation dimension of elevator shaft

塔身節 Mast	臂長 Jib length	A (m)	B (m)	C (m)	H (m)
L68B1	L1	39.5	33.5	40.7	211 >211*
	L2	33.5	27.5	34.7	
	L3	30.5	24.5	31.7	
	L4	27.5	21.5	28.7	
	L5	27.5	21.5	28.7	

塔身節 Mast	臂長 Jib length	H1 (m)	A (m)	P (t)	R (t)
L68B1	50	34.5	12	※	※
L69B1	50	40.5	12	※	※

主要性能參數 Specification

機構 Mechanism								電動機 Motor kW
			m/min	t	m/min	t		
	12t	55LFV30	0—44	6.0	0—22	12.0	630m >630m*	55
		55LFV30B	0—53	4.0	0—27	8.0		
			0—88	1.7	0—44	3.5		
	10t	45LFV25BL	0—40	5.0	0—20	10.0	500m >500m*	45
			0—48	4.0	0—24	8.0		
			0—80	1.5	0—40	3.0		
		55RCS25	0—45	5.0	0—23	10.0		
	0—90	2.5	0—45	3.0				
	45DFV40B		15°—85° 3.0min					45
	30LYWZ40		15°—85° 3.0min					30
	5RFCV		0—0.7 rpm					2x120 N·m
	RTC240		0—0.7 rpm					2x120 N·m
	RT		12.5—25 m/min					4x2.6/5.2

裝機容量 (cosΦ=0.8)	kVA	
380V (±5%) 50 Hz / 60 Hz	55LFV30, 55LFV30B : 140 ; 45LFV25BL : 125 ; 55RCS25 : 120	

* ※ 與製造商聯繫 Contact us, please.

本技术参数不受法律约束，技术信息请详见相应说明书。
Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions



YONGMAO HOLDINGS LIMITED

Luffing STL203C
Luffing STL203C

1 1
9 9
1 2