


永茂建机
YONGMAO

STL420
24t

動臂系列

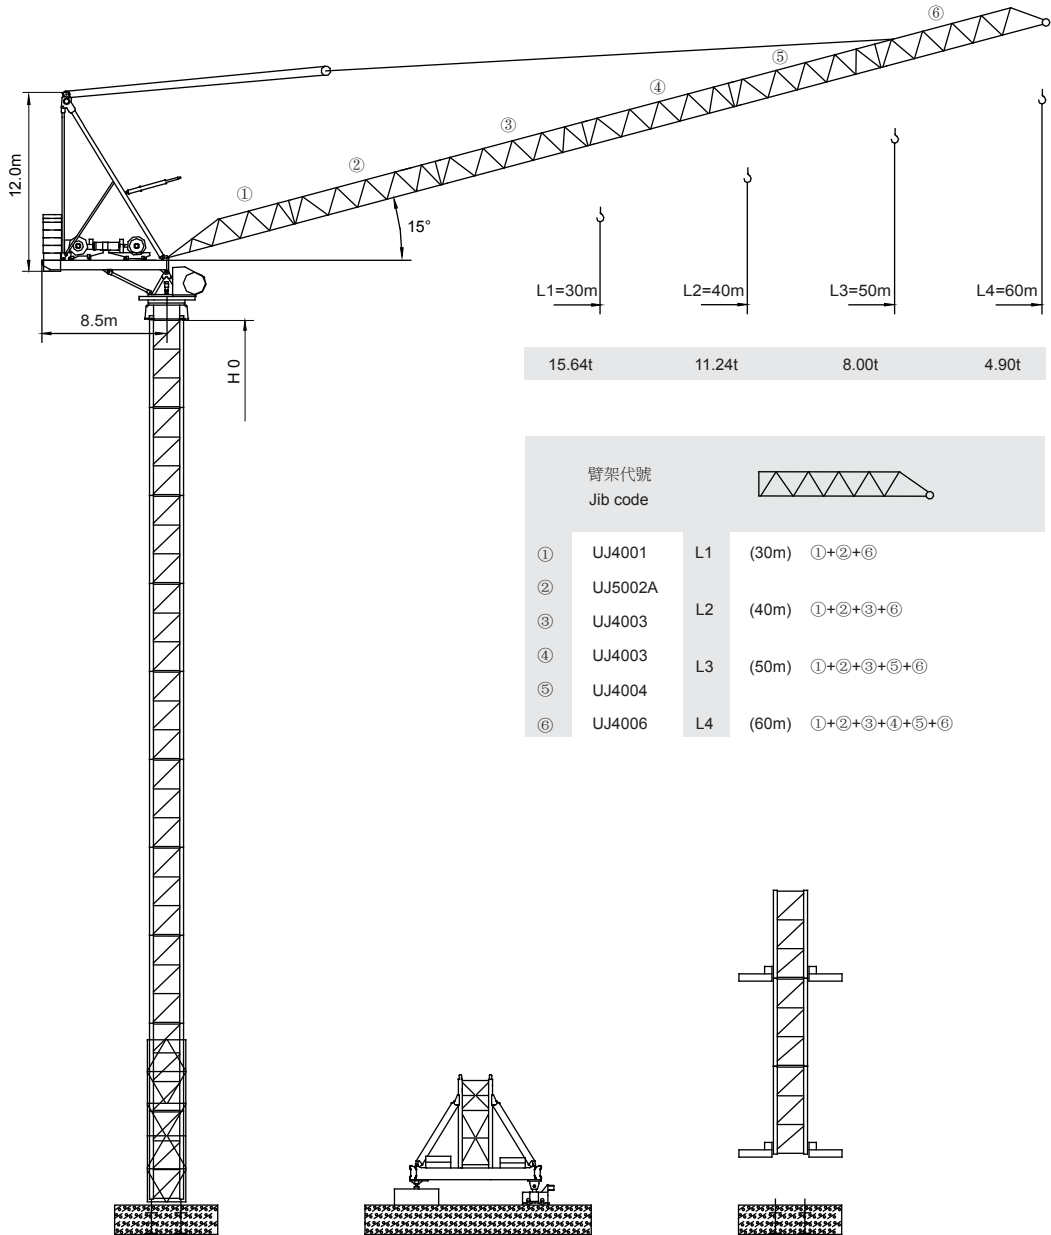

臂架代號 Jib code			
①	UJ4001	L1	(30m) ①+②+⑥
②	UJ5002A	L2	(40m) ①+②+③+⑥
③	UJ4003		
④	UJ4003	L3	(50m) ①+②+③+⑤+⑥
⑤	UJ4004		
⑥	UJ4006	L4	(60m) ①+②+③+④+⑤+⑥



CE FEM



Luffing

V 5.0-09112014

STL420
24t

載荷表 Load Chart

				U-24-A(B)-1-V1.0														
R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	20	22	24	26	28	30	32	34	36	38	40	45	50	55	60
60	↓	5.57~25.7	12.0	12.00	12.00	12.00	11.84	10.99	10.23	9.56	8.98	8.45	7.99	7.57	6.68	5.97	5.38	4.90
50	↓	4.67~32.9	12.0	12.00	12.00	12.00	12.00	12.00	12.00	12.00	11.59	10.90	10.27	9.71	8.53	7.60		
	↓	4.67~23.1	18.0	18.00	18.00	17.26	15.89	14.72	13.70	12.81	12.02	11.33	10.70	10.14	8.95	8.00		
40	↓	3.78~36.3	12.0	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	11.43	10.85				
	↓	3.78~25.3	18.0	18.00	18.00	18.00	17.53	16.24	15.12	14.14	13.28	12.51	11.82	11.24				
	↓	3.78~18.9	24.0	22.66	20.52	18.74	17.23	15.94	14.73	13.75	12.89	12.12	11.43	10.85				
30	↓	2.88~30.0	12.0	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00				
	↓	2.88~26.1	18.0	18.00	18.00	18.00	18.00	18.00	18.00	16.75	15.64							
	↓	2.88~19.4	24.0	23.29	21.09	19.25	17.70	16.36	15.25									

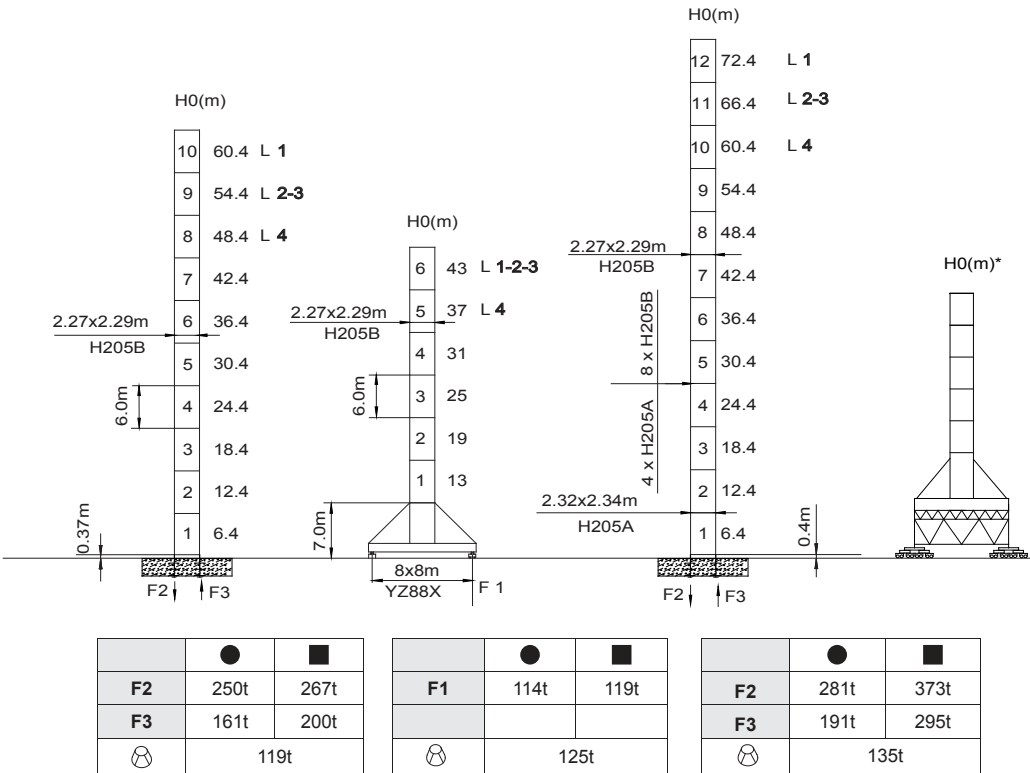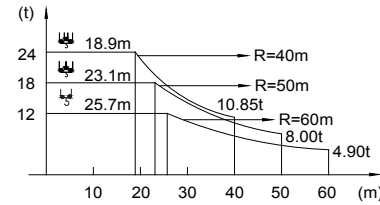

	●	■
F2	250t	267t
F3	161t	200t
⊗	119t	

	●	■
F1	114t	119t
⊗	125t	

	●	■
F2	281t	373t
F3	191t	295t
⊗	135t	

● 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
⊗ 整機自由高度重量 (不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

Luffing STL420

Luffing STL420
Luffing STL420






YONGMAO HOLDINGS LIMITED




YONGMAO HOLDINGS LIMITED

STL420
24t

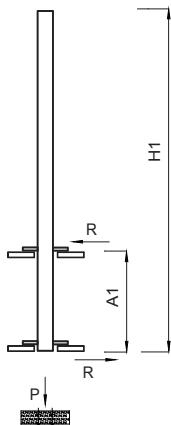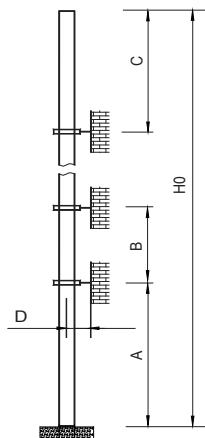

內爬框外廓尺寸
Overall dimensions of the internal climbing frame



內爬開口尺寸
Dimensions of the internal climbing opening


塔身節 Mast	臂長 Jib length	A (m)	B (m)	C (m)	D (m)	H0 (m)
H205B	L1	30/48	24/32	32	>4	390 >390 *
	L2-3	30/42	24/30	30		
	L4	30/36	24/28	28		

塔身節 Mast	臂長 Jib length	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
H205B	L1	60	18	160	34	3.28	2.40	3.50	3.02
	L2-3	48		158	32				
	L4	42		154	31				

附著道數 Number of tie collars=(H0-A-C)/B+1

超過100m高度，需降低載荷，請與公司聯繫。

Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.

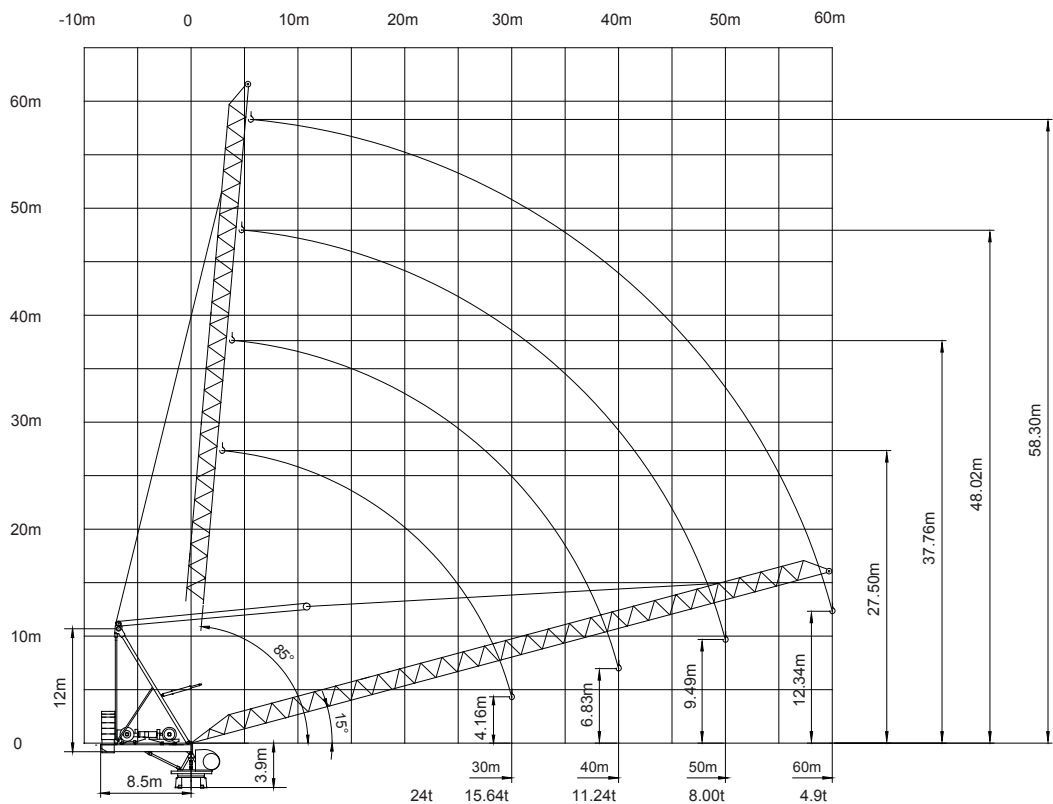

STL420
24t

主要性能參數 Specifications

機構 Mechanism									電動機 Motor kW
		m/min	t	m/min	t	m/min	t		
	90LFV60DB1☆	0-40	12.0	0-26	18.0	0-20	24.0	1030m > 1030m *	90
		0-96	4.0	0-64	6.0	0-48	8.0		
		0-160	1.0	0-106	1.5	0-80	2.0		
	90LFV60	0-38	12.0	0-25	18.0	0-19	24.0	550m	90
		0-46	10.0	0-30	15.0	0-23	20.0		
		0-72	4.0	0-48	6.0	0-36	8.0		
	90DFV60B	15°-85° 3.0min							90
	RTC290	0-0.8 rpm							2x145 N·m
	RT	12.5-25 m/min							4x2.6/5.2

供電容量 Power supply	kVA
380V (± 10%) 50 Hz	90LFV60DB1 , 90LFV60 : 170

* 與製造商聯繫 Contact us, please.

☆ 标准配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。
These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED

Luffing STL420

Luffing STL420

1 1
7 7
5 6