


永茂建机
YONGMAO

STL660C
32t

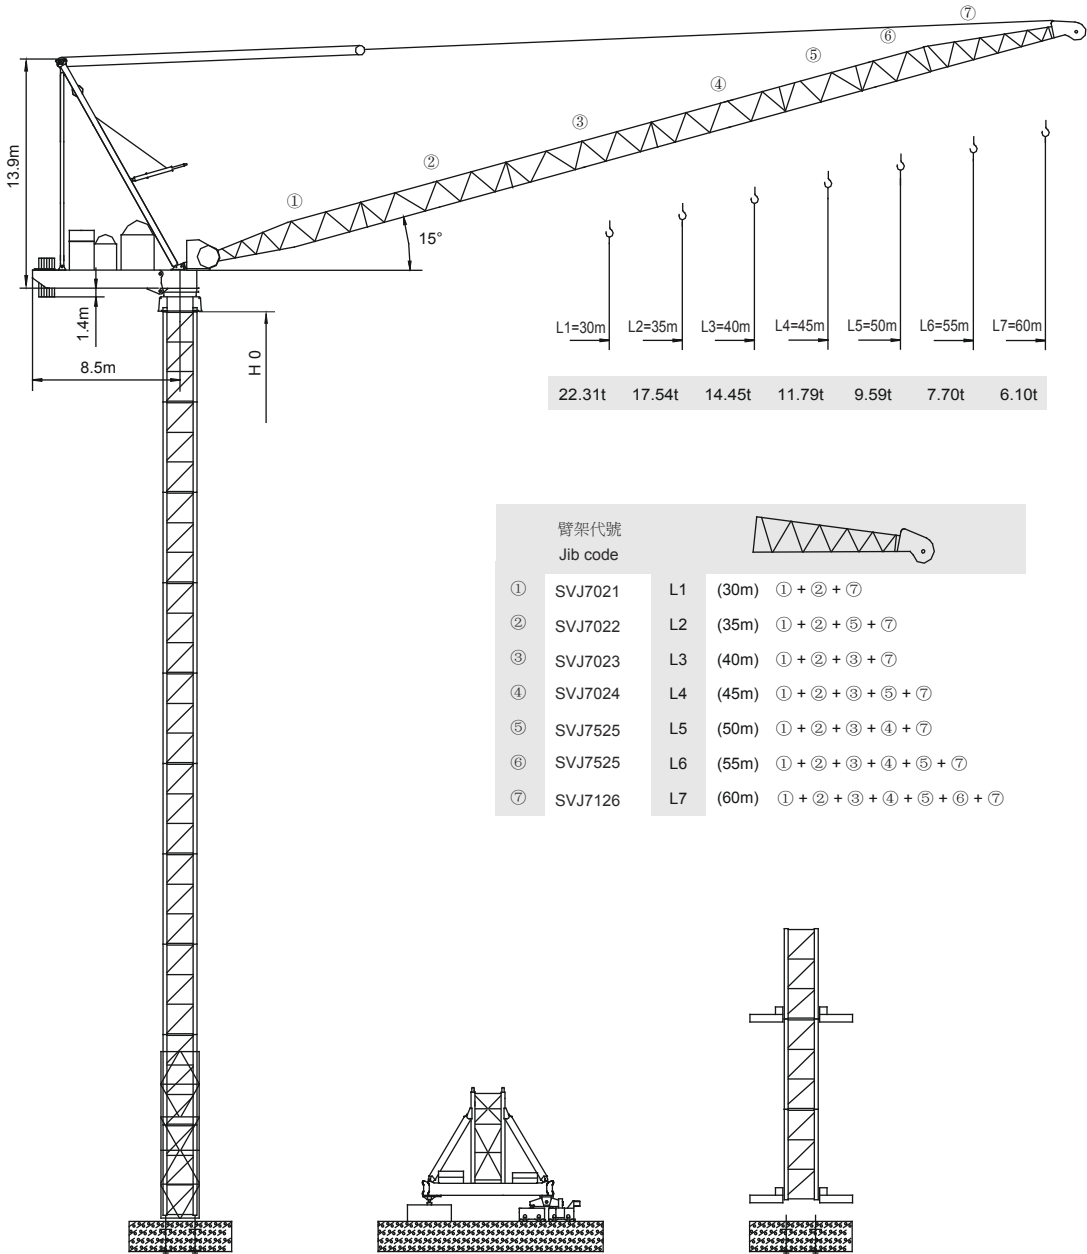

CE FEM

Luffing

V 5.0-09112014

動臂系列

1 1
6 6
5 6



Luffing STL660C
Luffing STL660C

STL660C
32t

載荷表 Load Chart

ST8-32-A(B)-1-V1.0

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	15	20	25	30	35	40	45	50	55	60
60	↓	8.39~36.00	16.00	16.00	16.00	16.00	16.00	16.00	14.45	11.67	9.44	7.62	6.10
	↕	8.39~22.70	27.00	27.00	27.00	24.40	22.31	17.54	13.95	11.17	8.94	7.12	5.60
55	↓	5.79~36.10	16.00	16.00	16.00	16.00	16.00	16.00	14.45	11.67	9.48	7.70	
	↕	5.79~22.80	32.00	32.00	32.00	28.61	22.31	17.54	13.95	11.17	8.98	7.20	
50	↓	5.34~36.20	16.00	16.00	16.00	16.00	16.00	16.00	14.45	11.74	9.59		
	↕	5.34~22.90	32.00	32.00	32.00	28.61	22.31	17.54	13.95	11.24	9.09		
45	↓	4.89~36.30	16.00	16.00	16.00	16.00	16.00	16.00	14.45	11.79			
	↕	4.89~23.00	32.00	32.00	32.00	28.61	22.31	17.54	13.95	11.29			
40	↓	4.44~36.40	16.00	16.00	16.00	16.00	16.00	16.00	14.45				
	↕	4.44~23.20	32.00	32.00	32.00	28.61	22.31	17.54	13.95				
35	↓	3.99~35.00	16.00	16.00	16.00	16.00	16.00	16.00					
	↕	3.99~23.30	32.00	32.00	32.00	28.61	22.31	17.54					
30	↓	3.53~30.00	16.00	16.00	16.00	16.00	16.00						
	↕	3.53~23.40	32.00	32.00	32.00	28.61	22.31						

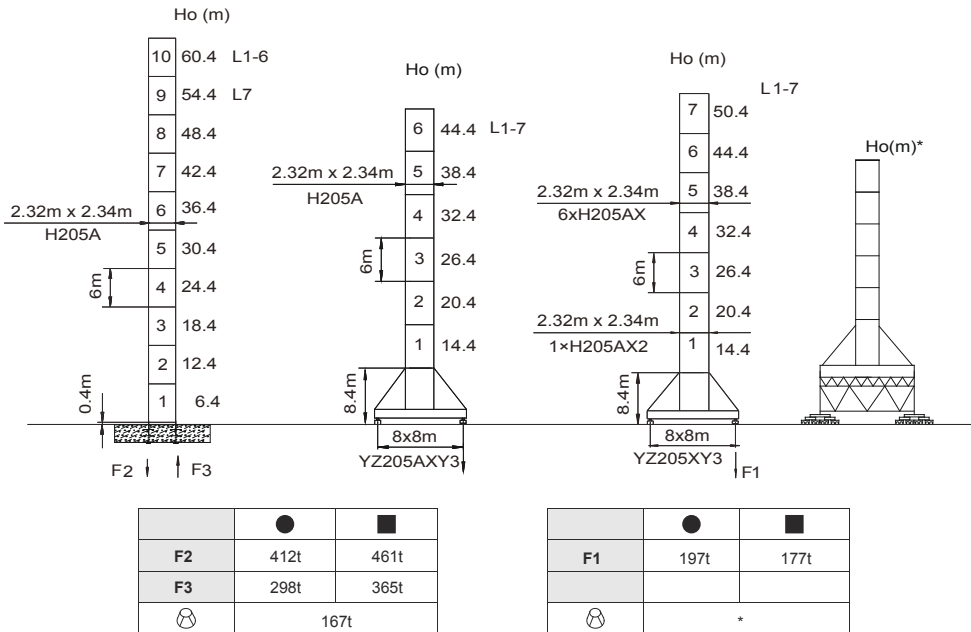

● 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
⊗ 整機自由高度重量 (不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

Luffing STL660C

控永
股茂


YONGMAO HOLDINGS LIMITED

控永
股茂

YONGMAO HOLDINGS LIMITED

STL660C

32t

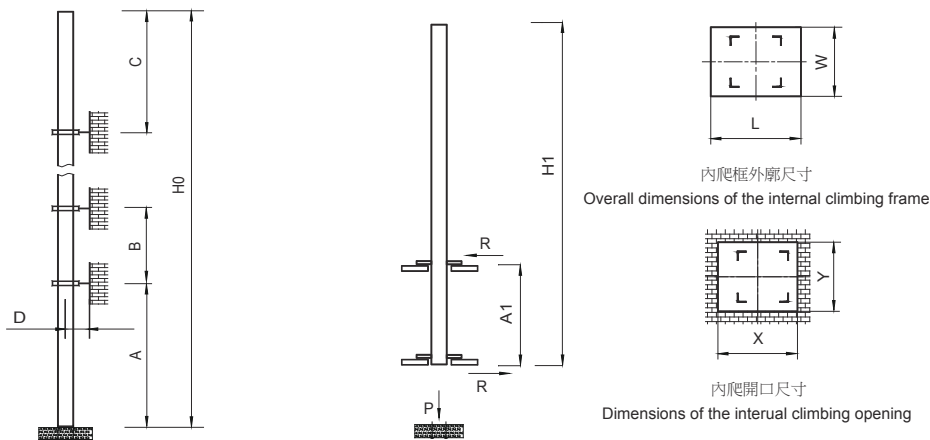

塔身節 Mast	臂長 Jib length	A (m)	B (m)	C (m)	D (m)	H0 (m)
H205A	L1-7	39.4	24.0	39.0	>4	500 >500 *


附著道數 Number of tie collars=(H0-A-C)/B+1

超過100m高度，需降低載荷，請與公司聯繫。

Load should be reduced when the height exceeds 100m.

Please contact Yongmao for details.

塔身節 Mast	臂長 Jib length	H1 (m)	A1 (m)	P (t)	R (t)
H205A	L1-6	60	18	192	64
	L7	54	18	187	62
	臂長 Jib length	X (m)	Y (m)	L (m)	W (m)
	L1-6	3.42	2.74	3.4	2.9
	L7				

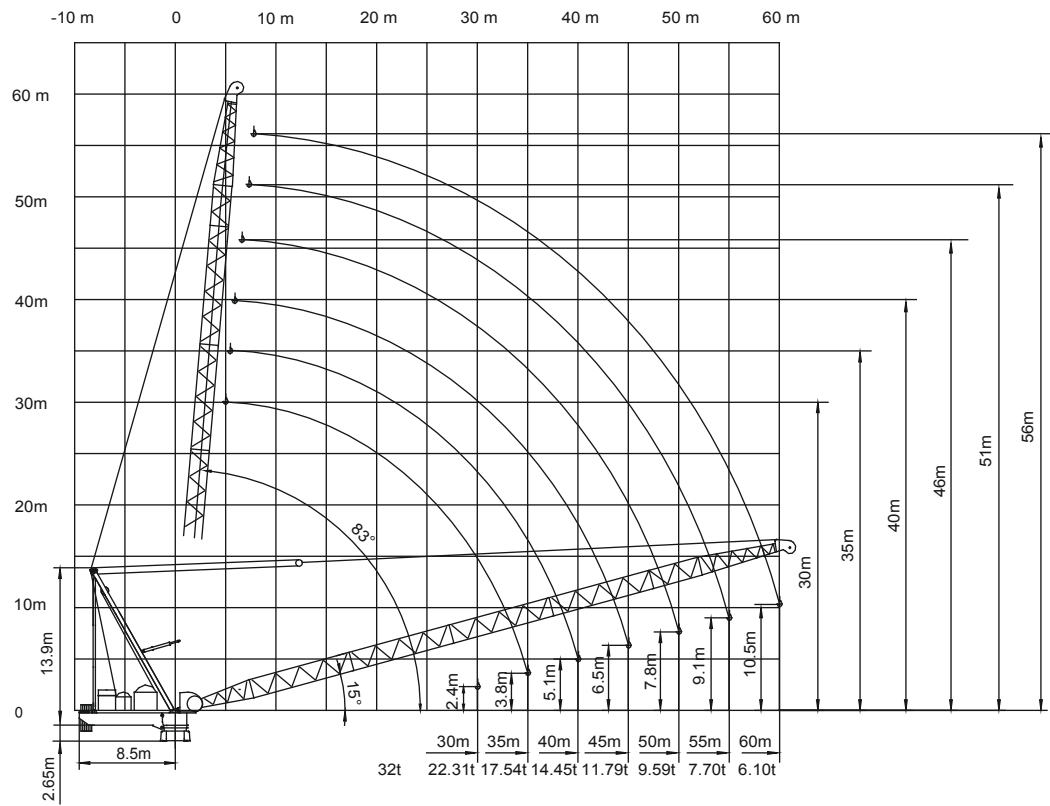

STL660C

32t

主要性能參數 Specifications

機構 Mechanism		●		●●			功率 Power
		m/min	t	m/min	t		
	2160LYS160	0—48 0—150	16.0 0	0—24 0—75	32.0 0	750m >750m *	320 kW (428hp)
	1107DYS160	15°—83° 2 min					
	190RYS	0—0.66 rpm					
	RTV	0—15 m/min					4x7.5 kW

● 供電容量 Power supply	kVA
380V (± 10 %) 50Hz	40

* 與製造商聯繫 Contact us, please.

☆ 标准配置 Standard configuration.

本技術參數不受法律約c束，技術資訊請詳見相應說明書。
These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED

Luffing STL660C
Luffing STL660C