


永茂建机
YONGMAO

STT139
6t

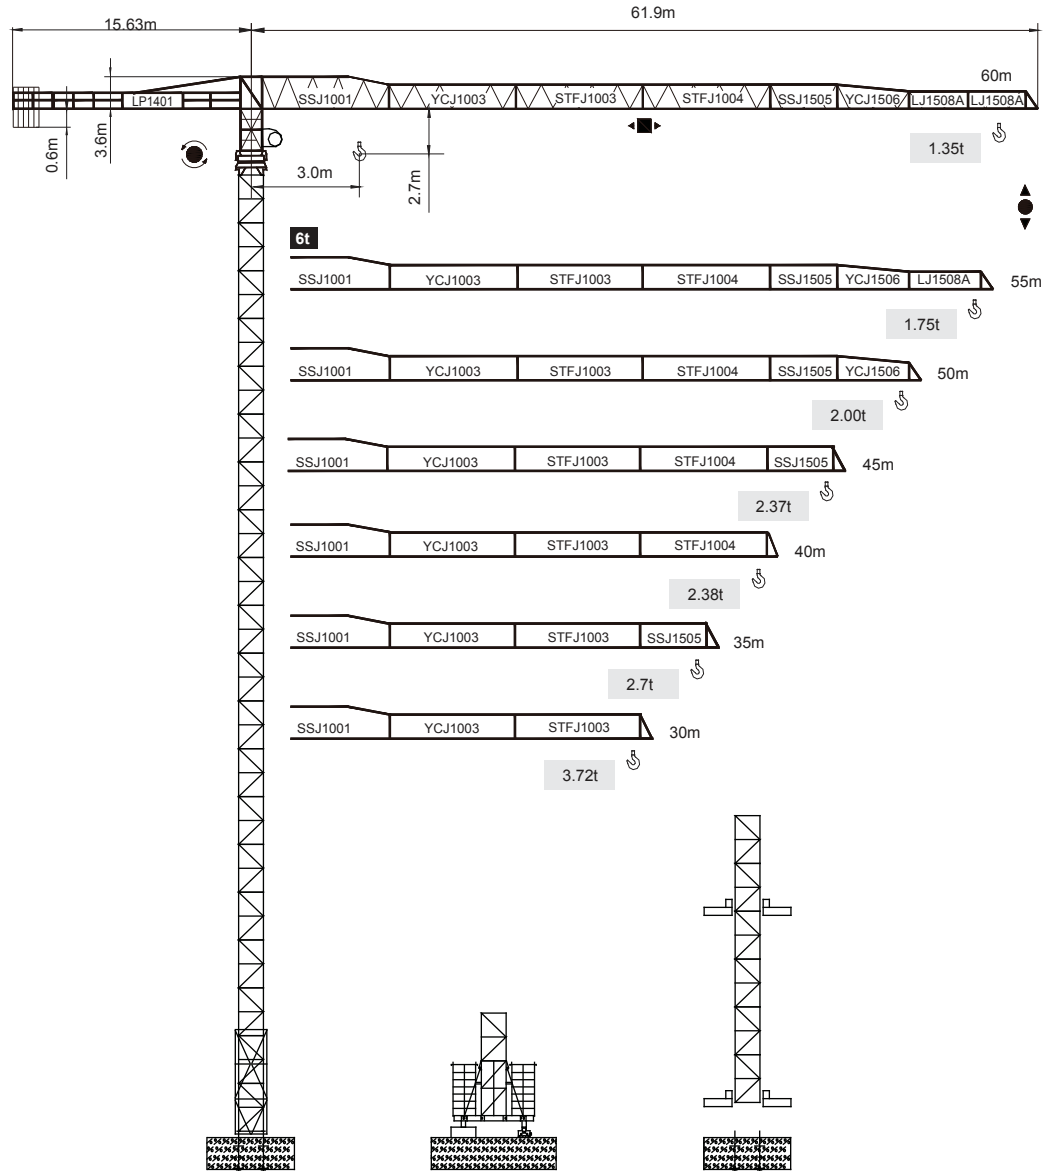

CE FEM

Topless

V 5.0-09112014

平頭系列

0 0
4 4
1 2

Topless STT139

Topless STT139

STT139
6t



載荷表 Load Chart

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	20	25	30	35	40	45	50	55	60
60		32.84	3.00	3.00	3.00	3.00	2.77	2.34	2.01	1.75	1.53	1.35
		17.98	6.00	5.29	4.06	3.24	2.67	2.24	1.91	1.64	1.43	1.25
55		36.16	3.00	3.00	3.00	3.00	3.00	2.65	2.28	1.99	1.75	
		19.77	6.00	5.92	4.55	3.65	3.02	2.55	2.18	1.89	1.65	
50		36.32	3.00	3.00	3.00	3.00	3.00	2.66	2.29	2.00		
		19.86	6.00	5.95	4.58	3.67	3.04	2.56	2.19	1.90		
45		37.26	3.00	3.00	3.00	3.00	3.00	2.75	2.37			
		20.37	6.00	6.00	4.72	3.79	3.14	2.65	2.27			
40		33.24	3.00	3.00	3.00	3.00	2.82	2.38				
		18.22	6.00	5.38	4.12	3.30	2.71	2.28				
35		32.15	3.00	3.00	3.00	3.00	2.70					
		17.74	6.00	5.21	3.99	3.19	2.62					
30		30.00	3.00	3.00	3.00	3.00						
		20.06	6.00	6.00	4.63	3.72						

(t)

6

17.98m

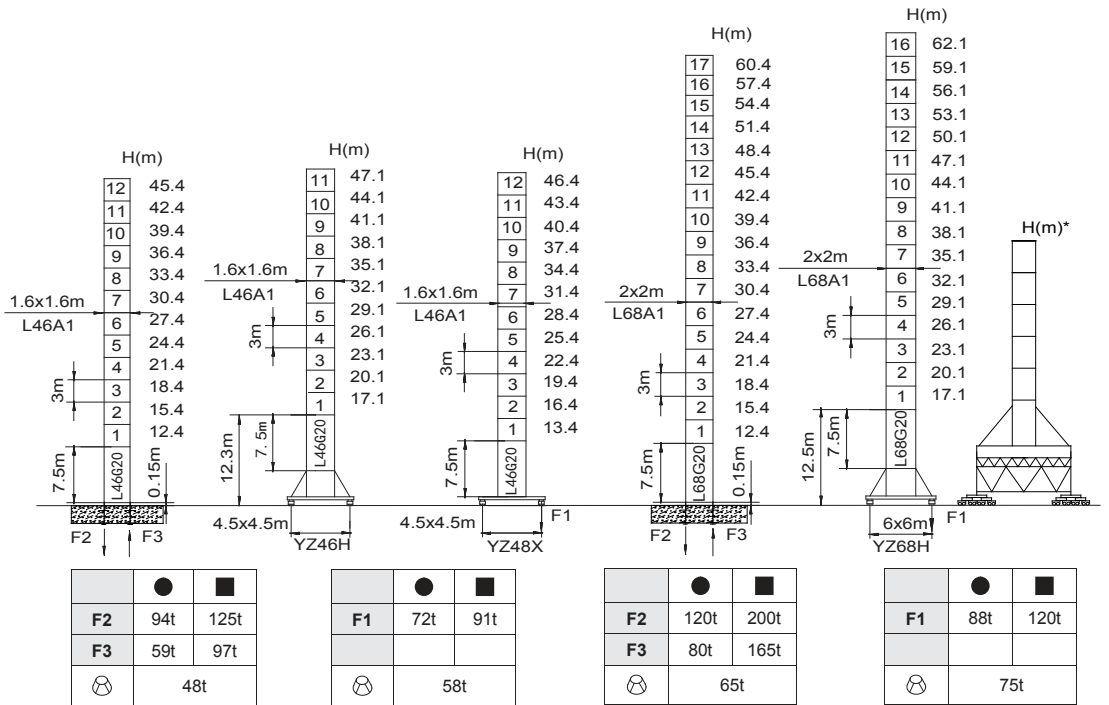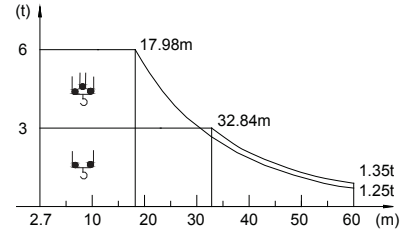

● 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
⊗ 整機自由高度重量 (不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

Topless STT139

控永
股茂



YONGMAO HOLDINGS LIMITED

控永
股茂


YONGMAO HOLDINGS LIMITED

STT139

6t

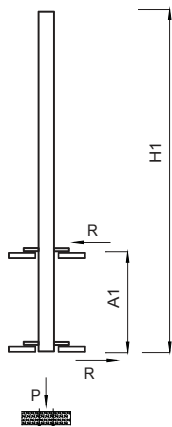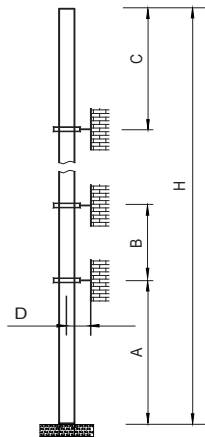

內爬框外廓尺寸
Overall dimensions of the internal climbing frame



內爬開口尺寸
Dimensions of the internal climbing opening

塔身節 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
L46A1	33	24	33.4	>3.2	200 >200 *
L68A1	45	36	45.4	>3.6	200 >200 *

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
L46A1	27.4	7-11	54.6	20.9	2.15	1.8	2.45	2.38
L68A1	54.4	16	80	22	2.58	2.17	2.78	3.29

附著道數 Number of tie collars $= (H-A-C)/B+1$

超過100m高度，需降低載荷，請與公司聯繫。

Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.

主要性能參數 Specifications

機構 Mechanism							電動機 Motor kW
		m/min	t	m/min	t		
	24YQL15 ☆	0 – 8.0 0 – 40 0 – 80	3.0 3.0 1.5	0 – 4.0 0 – 20 0 – 40	6.0 6.0 3.0	390m	24/24/5.4
	24PQC15	0 – 8.5 0 – 40 0 – 80	3.0 3.0 1.5	0 – 4.2 0 – 20 0 – 40	6.0 6.0 3.0	400m >400m *	24/24/6
	DTC55 ☆	0 – 57 m/min					55 N·m
	YMD50 ☆	0 – 0.7 rpm					2x5
	RTC190	0 – 0.7 rpm					2x95 N·m
	RT	12.5 – 25 m/min					2x2.6/5.2

供電容量 Power supply		kVA
380V (± 10%)	50 Hz	40

* 與製造商聯繫 Contact us, please.

☆ 标准配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。
These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

平頭系列

STT139

6t

Topless STT139

Topless STT139



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED