


永茂建机
YONGMAO

STT403
24/20/18t

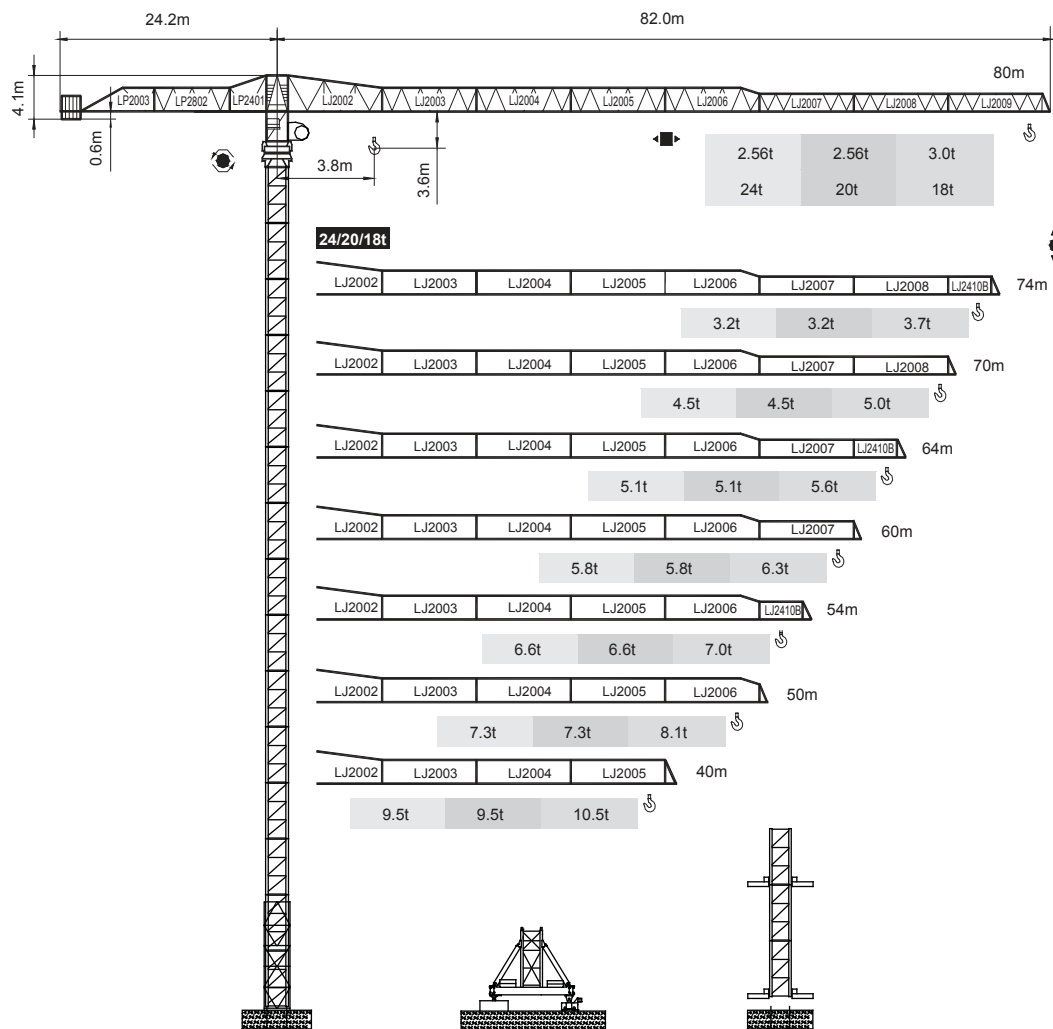

FEM

Topless

V 5.0-09112014

平頭系列

0 0
1 2
9 0

Topless STT403

Topless STT403


STT403
24/20/18t

載荷表 Load Chart

24t

N-24-A(B)-1-V1.0


R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	40	44	50	54	60	64	70	74	80
80	UU	12.49	24.00	8.13	5.47	4.75	3.89	3.43	2.85	2.53	2.11	1.87	1.56
	U	23.70	12.00	9.12	6.46	5.74	4.89	4.42	3.85	3.53	3.11	2.87	2.56
74	UU	15.57	24.00	10.47	6.98	6.03	4.91	4.30	3.54	3.12	2.57	2.26	
	U	28.92	12.00	11.47	7.98	7.03	5.91	5.30	4.54	4.12	3.57	3.26	
70	UU	16.30	24.00	11.58	8.03	7.07	5.93	5.31	4.54	4.11	3.56		
	U	31.24	12.00	12.00	9.02	8.07	6.93	6.31	5.54	5.11	4.56		
64	UU	16.30	24.00	11.58	8.03	7.07	5.93	5.31	4.54	4.11			
	U	31.24	12.00	12.00	9.02	8.07	6.93	6.31	5.54	5.11			
60	UU	16.30	24.00	11.78	8.29	7.35	6.22	5.62	4.86				
	U	31.24	12.00	12.00	9.17	8.26	7.18	6.59	5.86				
54	UU	17.01	24.00	12.22	8.50	7.50	6.31	5.66					
	U	32.65	12.00	12.00	9.50	8.50	7.31	6.66					
50	UU	17.01	24.00	12.22	8.51	7.51	6.31						
	U	32.65	12.00	12.00	9.50	8.50	7.31						
40	UU	17.01	24.00	12.22	8.50								
	U	32.65	12.00	12.00	9.50								

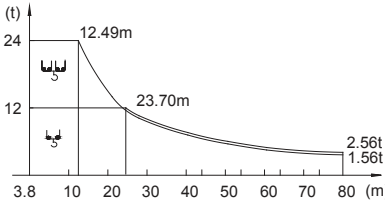

20t

N-20-A(B)-1-V1.0

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	40	44	50	54	60	64	70	74	80
80	UU	14.55	20.00	8.13	5.46	4.75	3.89	3.43	2.85	2.53	2.11	1.87	1.56
	U	27.73	10.00	9.12	6.46	5.74	4.89	4.42	3.85	3.53	3.11	2.87	2.56
74	UU	18.08	20.00	10.47	6.98	6.03	4.91	4.30	3.54	3.12	2.57	2.26	
	U	33.51	10.00	10.00	7.98	7.03	5.91	5.30	4.54	4.12	3.57	3.26	
70	UU	19.04	20.00	11.58	8.03	7.07	5.93	5.31	4.54	4.11	3.56		
	U	36.61	10.00	10.00	9.02	8.07	6.93	6.31	5.54	5.11	4.56		
64	UU	19.04	20.00	11.58	8.03	7.07	5.93	5.31	4.54	4.11			
	U	36.61	10.00	10.00	9.02	8.07	6.93	6.31	5.54	5.11			
60	UU	19.10	20.00	11.78	8.29	7.35	6.22	5.62	4.86				
	U	36.94	10.00	10.00	9.17	8.26	7.18	6.59	5.86				
54	UU	19.88	20.00	12.22	8.50	7.50	6.31	5.66					
	U	38.27	10.00	10.00	9.50	8.50	7.31	6.66					
50	UU	19.88	20.00	12.22	8.50	7.50	6.31						
	U	38.27	10.00	10.00	9.50	8.50	7.31						
40	UU	19.88	20.00	12.22	8.50								
	U	38.28	10.00	10.00	9.50								

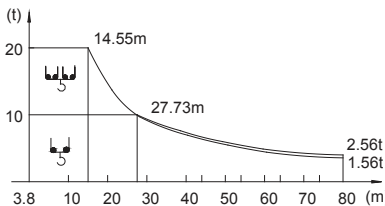

Topless STT403




YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED


STT403
24/20/18t

18t		N-18-A(B)-1-V1.0											
R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	40	44	50	54	60	64	70	74	80
80	UU	16.6	18.00	9.07	6.40	5.69	4.83	4.37	3.79	3.47	3.05	2.81	2.50
	U	30.5	9.00	9.00	6.67	5.99	5.19	4.75	4.21	3.91	3.52	3.29	3.00
74	UU	18.0	18.00	10.01	7.11	6.33	5.40	4.89	4.26	3.91	3.46	3.20	
	U	33.6	9.00	9.00	7.43	6.68	5.79	5.31	4.71	4.38	3.95	3.70	
70	UU	21.7	18.00	12.47	8.95	7.99	6.86	6.24	5.48	5.05	4.50		
	U	41.2	9.00	9.00	9.00	8.38	7.28	6.69	5.95	5.53	5.00		
64	UU	21.8	18.00	12.55	9.01	8.05	6.91	6.30	5.53	5.10			
	U	41.6	9.00	9.00	9.00	8.47	7.36	6.76	6.02	5.60			
60	UU	22.5	18.00	13.03	9.38	8.40	7.23	6.59	5.80				
	U	43.3	9.00	9.00	9.00	8.84	7.70	7.07	6.30				
54	UU	22.2	18.00	12.84	9.25	8.28	7.13	6.50					
	U	42.9	9.00	9.00	9.00	8.76	7.62	7.00					
50	UU	23.3	18.00	13.59	9.83	8.81	7.60						
	U	45.4	9.00	9.00	9.00	9.00	8.10						
40	UU	24.5	18.00	14.42	10.50								
	U	40.0	9.00	9.00	9.00								




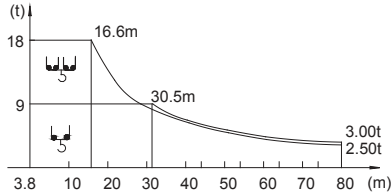


Topless STT403

STT403
24/20/18t

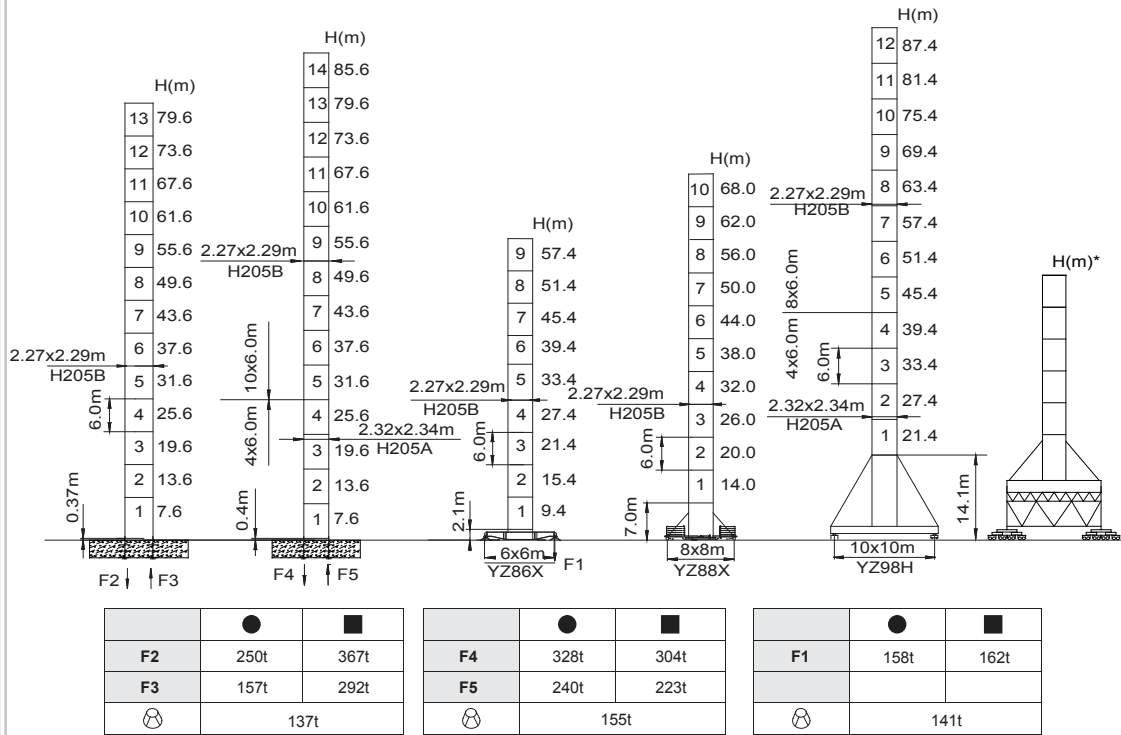

● 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
⊗ 整機自由高度重量 (不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

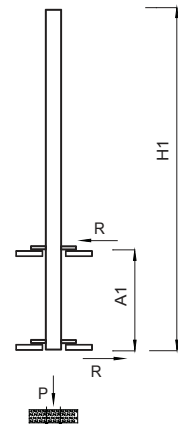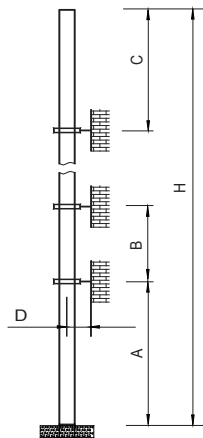

塔身節 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
H205B	63	42	52.6	>4.0	400 >400*

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
H205B	61.9	20	180	26	3.28	2.4	3.5	3.02

附著道數 Number of tie collars =(H-A-C)/B+1

超過100m高度，需降低載荷，請與公司聯繫。

Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED

Topless STT403

Topless STT403

STT403
24/20/18t

主要性能參數 Specification

機構 Mechanism								電動機 Motor kW
			m/min	t	m/min	t		
	24t	90 L F V 60 ☆	0 — 38 0 — 46 0 — 72	12.0 10.0 4.0	0 — 19 0 — 23 0 — 36	24.0 20.0 8.0	550m	90
		90 L F V 60 D B 1	0 — 40 0 — 96 0 — 160	12.0 4.0 1.0	0 — 20 0 — 48 0 — 80	24.0 8.0 2.0	1030m >1030m *	90
	20t	90 L F V 50 ☆	0 — 37 0 — 44 0 — 75	10.0 8.0 3.0	0 — 18 0 — 22 0 — 37	20.0 16.0 6.0	550m	90
		75 L F V 50 D B 1	0 — 32 0 — 96 0 — 150	10.0 3.0 1.0	0 — 16 0 — 48 0 — 75	20.0 6.0 2.0	1030m >1030m *	75
	18t	75 L F V 45 ☆	0 — 38 0 — 46 0 — 76	9.0 6.0 3.0	0 — 19 0 — 23 0 — 38	18.0 12.0 6.0	680m	75
		75 L F V 45 D B 1	0 — 40 0 — 96 0 — 160	9.0 3.0 1.0	0 — 20 0 — 48 0 — 80	18.0 6.0 2.0	1030m >1030m *	75
	11 D F V 10		0 — 65 m/min					11
	R T C 435 ☆		0 — 0.8 rpm					3x145 N·m
	7.5 R F C V		0 — 0.8 rpm					3x145 N·m
	R T		12.5 — 25 m/min					6x2.6/5.2

 供電容量 Power supply	kVA
380V (± 10%) 50 Hz	90 L F V 60 , 90 L F V 60 D B 1 , 90 L F V 50 : 135 75 L F V 50 D B 1 , 75 L F V 45 , 75 L F V 45 D B 1 : 115

* 與製造商聯繫 Contact us, please.
☆ 标准配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。
These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

平頭系列

STT403
24/20/18t



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED

Topless STT403

Topless STT403