

SPX429

max 2940 kg

3560 x 780 x 1955 mm

max 17 m

max 11 m

The top of the range mini crane. Technology, innovation and reliability enclosed in the best-seller mini crane ever.



Technical Information

Dimension	L x W x H	3560 x 780 x 1955 mm
Stab. Area		3730 x 3730 mm

Crane & Options Weights		Kg
	SPX429CDH	2280
	SPX429C+	2280
	/	200
	2.5T-D7	20
	PP400-4DX PP220-4DX PP220-2DX	45
	JIB800GX	25
	JIB800.2H1MX	170
	MV600.3E+	200
	MR800.4-6+4P	300

SPX429CDH	Petrol Engine	KUBOTA D722-E3B	14.9 kW 20 Hp
SPX429C+	Standard or Lithium Battery	N.4 BATTERIES 6V, 420Ah	4.0 kW 5.5 Hp

Speed		1.8 km/h (CDH) 0.72 km/h (C+)
Gradeability		20°
Ext. Tracks		770-1100 mm




Electric Power Pack

AUX	4 kW - 3F 400 VAC 50 Hz
AUX	EU: 2 kW - 1F 220 VAC 50 Hz USA/CANADA: 4 kW - 1F 110 VAC 60 Hz


Winch & Fall Stages

Main Winch	980 kg (Single line) 51 m - Ø 8 mm 24,4-33,2 m/min.
-------------------	---

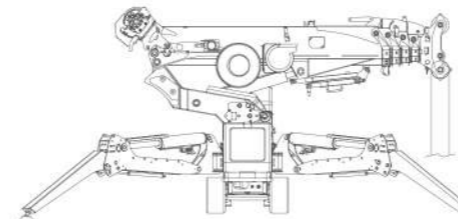


Max. Capacity	Line	Metros
max 2700 kg	3	-19 m
max 1950 kg	2	-31 m
max 980 kg	1	-64 m

Load Chart

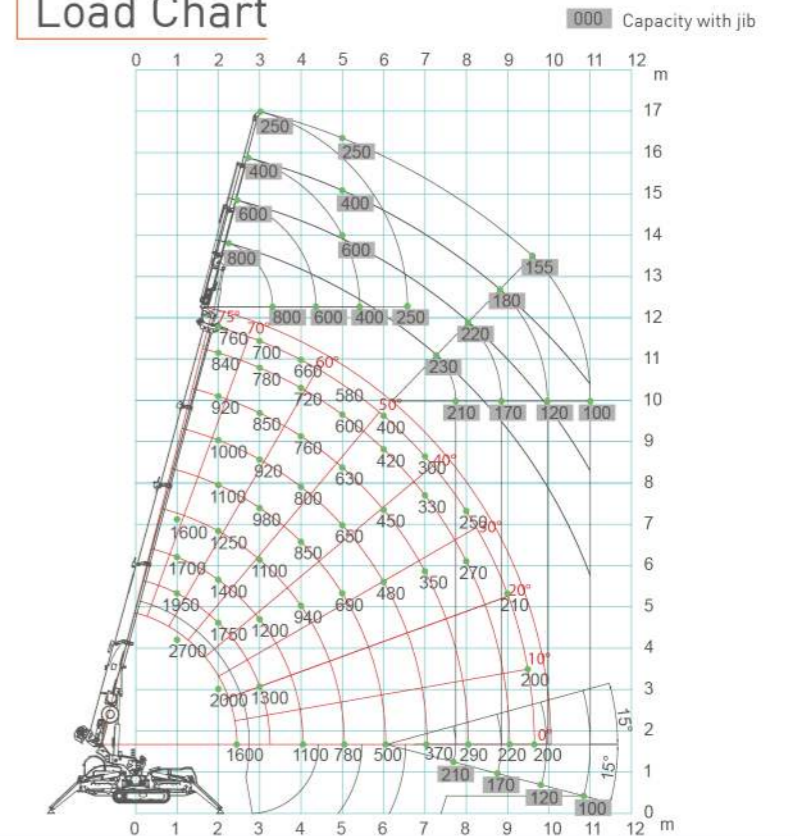

Dimensions

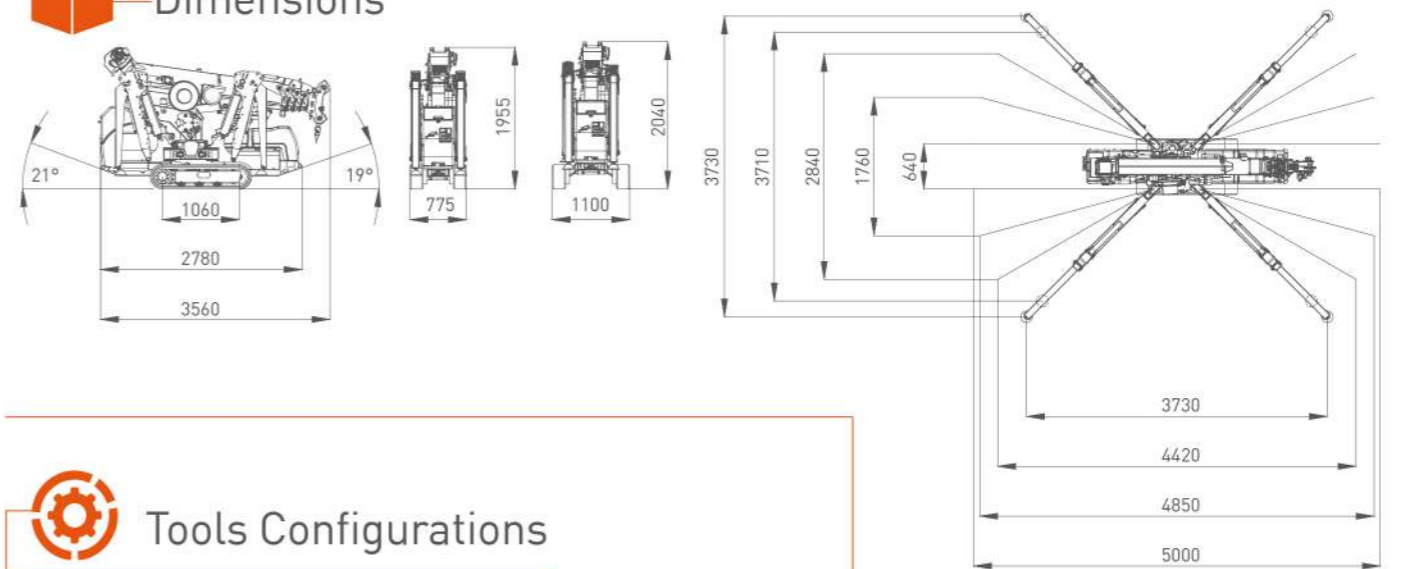

Crane Options

Battery Options

- BP-LT-SPX312-424
- BC-220V60A
- BC-110V60A

Battery Chargers

- BC-220V60A
- BC-110V60A

J-Connect

- J-CON
- J-CON-Y2

Electric Power Pack

- PP220-2DX
- PP220-4DX
- PP401-4DX

Attachments & Tools

- JIB800GX
- JIB800.2H1MX
- QC-MV600A
- MV600.3E+ + Steel Holder
- QC-MR800D
- MR800.4-6+4P + Steel Holder
- JIB301GR
- JIB302GR

Other Options: HA-SPX429, VAI, RC-SPX_B, RC-SPX_C, WUK-02, WT-2007242, EXT-209/312/424, OM400, 2.5T-D7, LAYOUT.

Tools Configurations

JIB800GX	JIB800.2H1MX	MV600.3E+	MR800.4-6+4P	JIB301/2GR
max 800 kg	max 800 kg	max 600 kg	max 800 kg	max 300 kg
max 740 kg @ 12.5 m	max 250 kg @ 17 m	max 400 kg @ 12 m	max 400 kg @ 13 m	max 300 kg @ 10.7 m
max 180 kg @ 10.2 m	max 100 kg @ 11 m	max 160 kg @ 7 m	max 130 kg @ 7 m	max 300 kg @ 7 m

- A2B
- BPI
- CCI
- DTC
- EXT
- GSC
- LMI
- P&C
- PPA
- SCI
- TH
- VW
- RCD
- 2SW
- 2ST