



SCC600TB

Telescopic Boom Crawler Crane 60 Tons Lifting Capacity

Quality Changes the World



The parameters and diagrams in the brochure is only for reference, which is subject to further update in real machine.

■ www.sany.com.cn



Telescopic Boom Crawler Crane SCC600TB

P03

Main
characteristics

- Lowerworks
- Upperworks
- Product Specification
- Safety Device

P08

Technical
parameters

- Main Performance and Parameters
- Basic Dimension of Whole Machine
- Transportation Dimension
- Transportation Scheme

P14

Cofigurations

- Working Range
- Load Chart of H
- Load Chart of Jib



SCC600TB TELESCOPIC BOOM CRAWLER CRANE 60 TONS LIFTING CAPACITY

QUALITY CHANGES THE WORLD

Main Characteristics

- Page 04 Lowerworks
- Page 04 Upperworks
- Page 04 Product Specification
- Page 06 Safety Devices



Product Specification



Engine

- Model: ISUZU 4HK1XKSC diesel engine.
- Type: four-stroke, water cooling, straight 4-cylinder, direct injection, turbo supercharging, inter-cooling. Meet Off-highway Emission Regulation of Europe (Tier III), and comply with Off-highway Emission Regulation of China (Tier III).
- Displacement: 5.19L.
- Rated power: 133kW/2000rpm.
- Maximum torque: 657N · m/1500rpm.
- Starting device: 24V-5.0kW.
- Radiator: aluminium sheet fin type radiator core.
- Air filter: dry type air filter system, fitted with main filter element, safety filter element and resistance indicator.
- Hand throttle: gear type hand throttle, electric.
- Fuel filter: replaceable paper filter element.
- Batter: 2 12Vx165Ah capacity batteries, connected in series.
- Fuel tank: 400L.

Electrical Control System

- Adopt SYIC-II integrated control system independently researched and developed by Sany. This system is featured by high integration level, accurate operation and reliable quality.
- Control system: composed of power system, engine system, main control system, Load Moment Limiter, auxiliary system and safety monitoring system. Data communication among controller, display and engine is conducted by CAN bus technology.
- Display: It can display the engine rotating speed, fuel volume, engine oil pressure, servo pressure, engine working time, load weight, boom angle and other working parameters and conditions.

Hydraulic System

- Main pump: adopt open piston pump with large variable displacement, providing oil supply to the main actuator.
- Gear pump: dual-gear pump for swing and control circuit.
- Control: the main pump adopts the control type of electrically proportionate positive flow, and the winch motor is piston motor with variable displacement. The operating components are two hydraulically-controlled cross handles, one hydraulic control pedal valve for boom telescoping, and one dual-gear pedal control valve for travel, to control each actuator proportionally.
- Way of cooling: heat exchanger, fan core and multi-stage cooling.
- Filter: large flow, high accuracy filter, with bypass valve and indicator, which can remind the user to replace the filter element in time.

- Max. pressure of system:
Main/aux. load hoist and travel system: 32MPa;
Boom hoist cylinder lifting: 32MPa;
Swing system: 24MPa;
Control system: 4.5MPa.
- Hydraulic oil tank capacity: 800L.

Main and auxiliary lifting mechanism

- Pump and motor: energy-efficient, combination of winch balance valve and anti-hook-sliding technology, lifting or lowering the load steadily.
- Winch brake adopts wet type and spring loaded fin type normally engaged brake, spring force braking, oil pressure released.
- Main and aux. load hoist winches adopt piston motor of fixed displacement to drive planetary reducer.

Main load hoist mechanism	Rope speed (outermost layer)	0~140m/min
	Diameter of wire rope	Φ18mm
	Overall length of wire rope	240m
	Rated line pull of single rope	5.2t
Auxiliary load hoist mechanism	Rope speed (outermost layer)	0~140m/min
	Diameter of wire rope	Φ18mm
	Overall length of wire rope	135m
	Rated line pull of single rope	5.2t

Boom hoist mechanism

- Double acting single piston rod hydraulic cylinder, fitted with safety balance valve, luffing angle: -2°~78°, adopting dead-weight luffing system to reduce the energy consumption and improve the steadiness of luffing operation.

Swing mechanism

- Swing brake adopts wet type and spring loaded fin type normally engaged brake, spring force braking.
- With integrated cushion valve, the swing system has free slip function to realize steady swing start and control, showing outstanding microinching performance.
- Unique swing cushion design ensures more stable braking.
- Swing drive: external gearing swing drive, capable of conducting 360° rotation, maximum rotation speed 2.5r/min. The maximum driving pressure can reach 24MPa.
- Swing lock: the upperworks can be locked in four positions by cylinder lock.
- Swing bearing: single row ball type bearing.



Product Specification

Counterweight

- Block-type counterweight is easy to assemble and disassemble. The self-assembly function is realized for easier transportation.
- The counterweight tray and blocks are stacked in a way that is easy to assemble, disassemble and transport.
- Rear counterweight: total 19t, with self-assembly function.
- The load charts of lifting without counterweights is available.

Superstructure

- High strength steel welding frame structure, no torsional deformation, reasonable component layout, and convenient maintenance service.

Cab and Control

- Novelty in cab design, artistic modeling and trim and large area glass window with a tilt angle of 20° to broaden horizon; fitted with low beam headlamp and rearview mirror to broaden horizon; installed with air conditioner and radio; the arrangement of seats, control handle and various control buttons is ergonomically designed to enable more conformable operation.
- Large integrated touch screen is adopted and the vibration handle is optionally offered, making the man-machine interaction better.
- Armrest box: operation handle, electrical switch, emergency stop switch and ignition switch are installed on the left and right armrest boxes. The armrest box can be adjusted with the seat.
- Seat: suspension type multi-mode multi-level regulated seat, fitted with unloading switch.
- Air conditioner: cooling and heating air, optimized air passage and air port.
- Multiple cameras can be presented on the monitor at the same time to realize real-time monitoring of wire rope on each winch, conditions behind the counterweight and surrounding the machine.

Traveling drive

- Independent traveling drive device is adopted for each side of crawler frame, so as to realize straight travel, turning through reducer and drive wheel by travel motor. And the machine is capable of automatically pick up the direction of dead ahead.
- Traveling speed: The traveling can be switched between high speed and low speed, and the high speed can be up to 2.5km/h;
- Gradeability: 45%.

Traveling braking

- Concealed wet type and spring loaded fin type normally engaged brake, spring force braking, oil pressure released.

Telescopic crawler

- The extension and retraction of crawler frames are realized through cylinder. The crawlers are extended at work and retracted for transport with the whole basic machine.
- The crawler is allowed fully extended or retracted during work, the respective load charts offered.

Crawler tensioning

- Jack is adopted to push the drive wheel and adjust the tension by adding shims.

Steering system

- It can realize single track turning and pivot turning.

Track shoe

- High strength alloy casting track shoes can stronger grip and ensure longer service life. 800mm wide, 61 pieces x 2.

Track roller

- Maintenance-free track roller.

Product Specification



Main boom

- The boom is made of high-strength steel structure with U-shape section area, with five sections, of which the basic boom is 11.88m and the max. boom length is 46m.
- Dual cylinder full power rope row for telescoping.

Fixed jib

- Two FJ configurations: 9.2m and 16m respectively.
- Installation angle includes 0°, 15° and 30°.

Boom tip pulley

- Welding structure, connected with the boom through pin, and used for auxiliary hook operation.

Lifting hook

Name	Capacity (t)	Pulley block	Weight (t)	Quantity
1	60	6	0.61	1
2	5	1	0.1	1

Note: the above-mentioned operating equipment is full-up configuration. The actual configurations are subject to contract.

Safety Device



Smart Integrated Load Moment Indicator

- The integrated LMI system is provided as standard offering to realize calibration-free and high safety and efficiency for equipment control to realize calibration-free and high safety and efficiency for equipment control.
- The LMI system can automatically detect the suspended load weight, working radius of the crane and the angle of boom, and compare rated load weight and actual load, working radius and boom angle. Under normal operation condition, it can intelligently judge and automatically cut off the crane action in dangerous direction, and have black box function to record the overload information.
- Its main components include: monitor, controller, length and angle sensor, pressure sensor, etc.

Assembly/working mode switching switch

- In Assembly Mode, certain safety devices are disabled to facilitate crane assembly.
- In Work Mode, all safety limiting devices activate to protect the operation.

Emergency Stop

- In emergency situation, this button is pressed down to cut off the power supply of the whole machine and all actions stop.

Over-hoist Protection of the Main/Auxiliary Load Hoist

- Height limiter is equipped on the boom/jib tip, which prevents the hook lifting up too much. When the hook is lifted up to the limit height, the limit switch activates, alarm pops up on the monitor, buzzer on the right front control panel sends alarm, failure indicator light starts to flash and the hook hoisting action is cut off automatically.

Over-release Protection of the Main/Auxiliary Load Hoist

- Three-wrap protector is installed on main and aux. load hoist to prevent over-release of wire rope. When the rope is paid out close to the last three wraps, the limit switch acts, and the system sends alarm through buzzer and show the alarm on the monitor, automatically cutting off the winch action.



Safety Device

Function Lock

- If the function lock lever is not in work position, all the other handles won't work, which prevents any mis-operation caused by accidental hitting.

Slewing Lock

- Electrical lock is provided, which needs to be released for swing to work, so as to prevent operator accidentally hit the handle and ensure the safety.
- The slewing lock device can lock the upperworks at two directions.

Hook Latch

- The lifting hook is installed with a baffle plate to prevent wire rope from falling off.

GPS Monitoring System

- Standard remote monitoring system: It can provide functions like GPS locating, GPRS data transfer, machine status inquiry and statistics, operating data monitoring and analysis, and remote diagnosis of failures.

Tri-color Load Indicator

- The load indicator light has three colors, i.e., green, yellow and red; and the real time load status is presented on the display. When the actual load is smaller than 90% of rated load, the green light is on; when the actual load is larger than 90% and smaller than 100%, the yellow light is on, the alarm light flashes and sends out intermittent sirens; when the actual load reaches 100% of rated load, the red light is on, the alarm light flashes and sends out continuous sirens. When the actual load reaches 102%, the system will automatically cut off the crane's dangerous operation.

Flash Alarm

- When the LMI is powered on, the flash alarm will turn on.

Swing Indicator Light

- The swing indicator light flashes during traveling or swing.

Seat Interlock

- If the operator leaves the seat, all control handles and switches will be disabled immediately to prevent any mis-operation due to accidental collision.

Illuminating Light

- The machine is equipped with short-beam light in front of machine, lamps in operator's cab and lighting devices for night operation, as well as boom lights, so as to increase the visibility during work.

Rearview Mirror

- It is installed at the front of the operator's cab and at the right handrail of the platform.

Level Indicator

- Electrical level indicator can show the inclination angle of superstructure on the monitor.

Closed Circuit Monitoring System

- There are two cameras on the tail of rotating bed, which can show the rear part and winches working on the machine.



SCC600TB TELESCOPIC BOOM CRAWLER CRANE 60 TONS LIFTING CAPACITY

QUALITY CHANGES THE WORLD

Technical Parameters


- Page 09 Major Performance & Specifications
- Page 10 Outline Dimension
- Page 11 Transport Dimension
- Page 13 Transport Plan

> 08

Major Performance & Specifications

Major Performance & Specifications of SCC600TB			
Specification		Unit	Parameter
Outline dimension	Full length of the whole crane	mm	14717
	Width of the whole machine (retracted)	mm	4800(3000)
	Height of the whole machine	mm	3300
	Center distance of driving and engaged wheels	mm	5260
	Width of track shoe	mm	800
H (main boom) configuration	Maximum rated lifting weight	t	60
	Main boom length	m	11.8~46
	Main boom angle	°	-2°~78°
	Maximum rated lifting moment	t·m	220
FJ(fixed jib) configuration	Longest main boom + longest jib	m	46+16
	Included angle between main boom and jib	°	0°, 15°, 30°
Working speed	Main/aux. load hoist rope speed	m/min	0~140
	Time to fully boom up/down	s	75/75
	Time to fully extend/retract boom	s	110/120
	Slewing speed	rpm	0~2.5
	No-load traveling speed	km/h	0~2.5
Engine	Model		ISUZU 4HK1XKSC
	Rated power	kW/rpm	133/2000
Wire rope	Diameter	mm	Φ18
Transportation parameters	Weight of the whole machine	t	64.9
	Maximum weight of single piece transportation	t	44.3(remove counterweight, jib, main and aux hooks)
	Transportation dimension (long x width x height)	mm	14717×3000×3300
Other Parameters	Average ground bearing pressure	MPa	0.07
	Min. swing radius	mm	4403







Outline Dimension

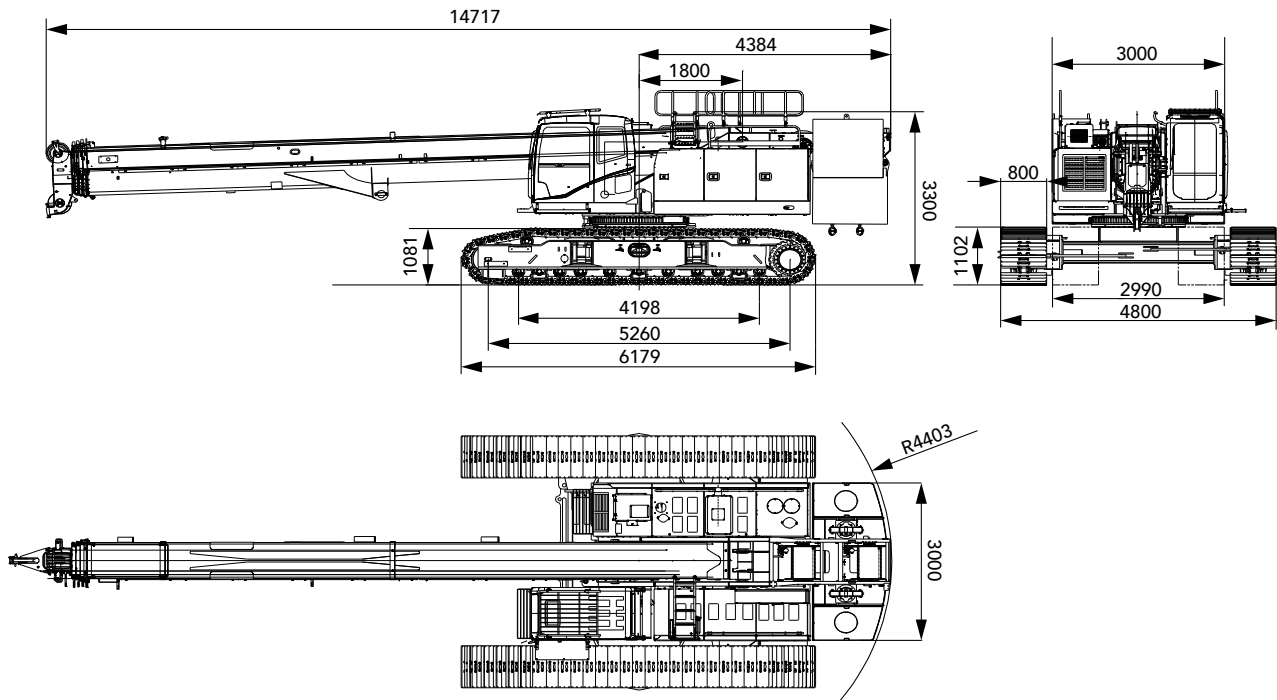

Transport Dimension

Note:

- ① . The component transportation dimension is schematic diagram, and is not drawn to scale. The marked dimension is design value, excluding the package.
- ② . The weight is design value, which may be slightly different because of manufacturing tolerance. The total weight of counterweight is 9.5t.
- ③ . After product upgrading of the Company, the outline dimension and weight of the components above may vary, and the new product shall prevail.

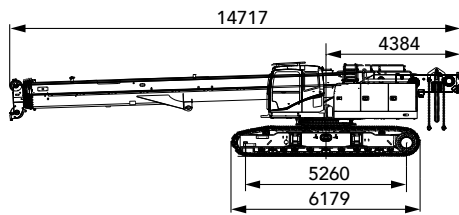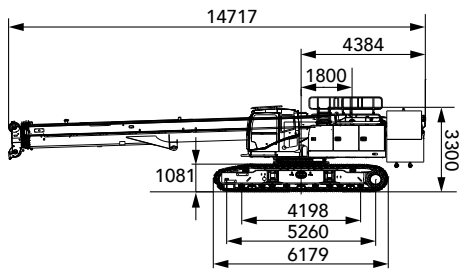

Whole Machine ×1

Length (L)	14.72m
Width (W)	3.00m
Height (H)	3.30m
Weight	64.9t

Basic Machine (without counterweight, jib and hooks) ×1

Length (L)	14.72m
Width (W)	3.00m
Height (H)	3.30m
Weight	44.3t

Counterweight Tray ×1

Length (L)	3.00m
Width (W)	1.33m
Height (H)	1.31m
Weight	12.8t

Rear Counterweight ×2

Length (L)	0.78m
Width (W)	1.23m
Height (H)	1.21m
Weight	3.1t


60T Hook ×1

Length (L)	0.41m
Width (W)	0.49m
Height (H)	1.58m
Weight	0.6t


5T Hook ×1

Length (L)	0.24m
Width (W)	0.24m
Height (H)	0.66m
Weight	0.1t

Transport Dimension

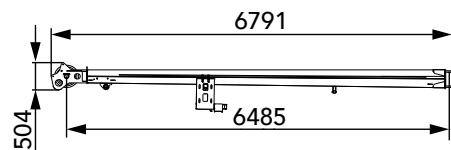


6.5m jib ×1	
Length (L)	6.79m
Width (W)	0.36m
Height (H)	0.50m
Weight	0.24t

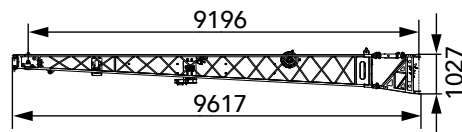

9.2m jib ×1	
Length (L)	9.62m
Width (W)	0.80m
Height (H)	1.03m
Weight	0.7t


Transport Plan

- Transport mode 1: whole machine transport, total weight: 64.9t, L×W×H: 14.72m×3.0m×3.3m.

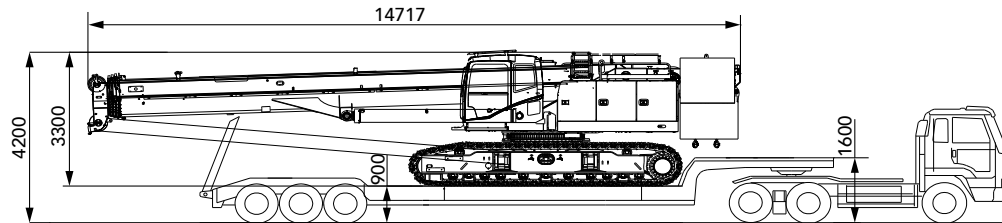


- Transport mode 2: remove counterweight

Trail 1: basic machine, remove counterweight, total weight: 45.9t, L×W×H: 14.72m×3.0m×3.3m.

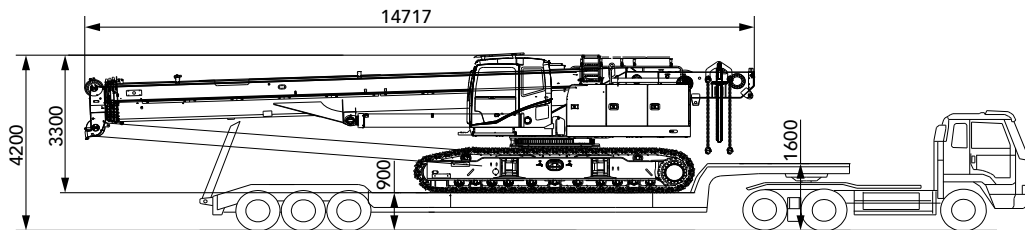


Trail 2: rear counterweight, weight: 19t, L×W×H: 1.3m×3.0m×2.1m.

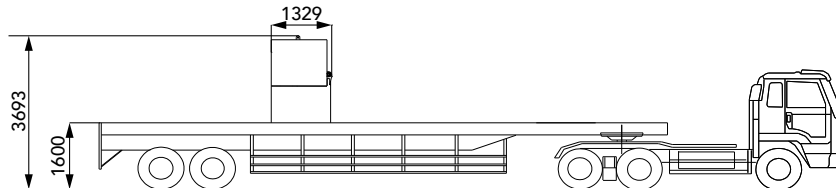


- Transport mode 3: remove counterweight, jib, and hooks, by 2 trails.

Trail 1: basic machine, remove counterweight, hooks and jib, total weight: 44.3t.

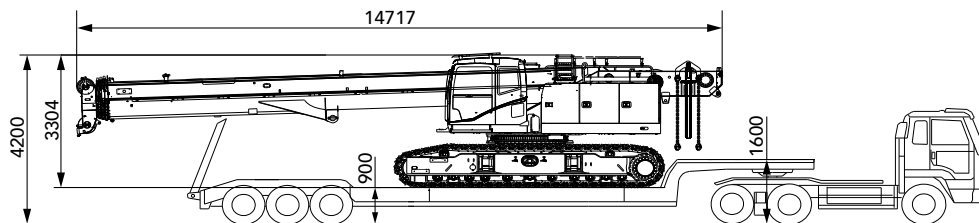

Trail 2: counterweight, hooks and jib, total weight: 20.6t.

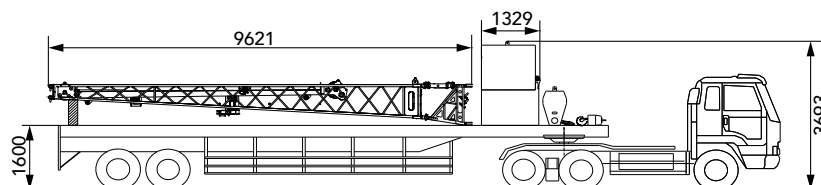



SCC600TB TELESCOPIC BOOM CRAWLER CRANE 60 TONS LIFTING CAPACITY


QUALITY CHANGES THE WORLD

Cofigurations

- Page 15 Working Range
- Page 16 Load Chart of H
- Page 17 Load Chart of Jib

> 14

Working Radius of H Configuration

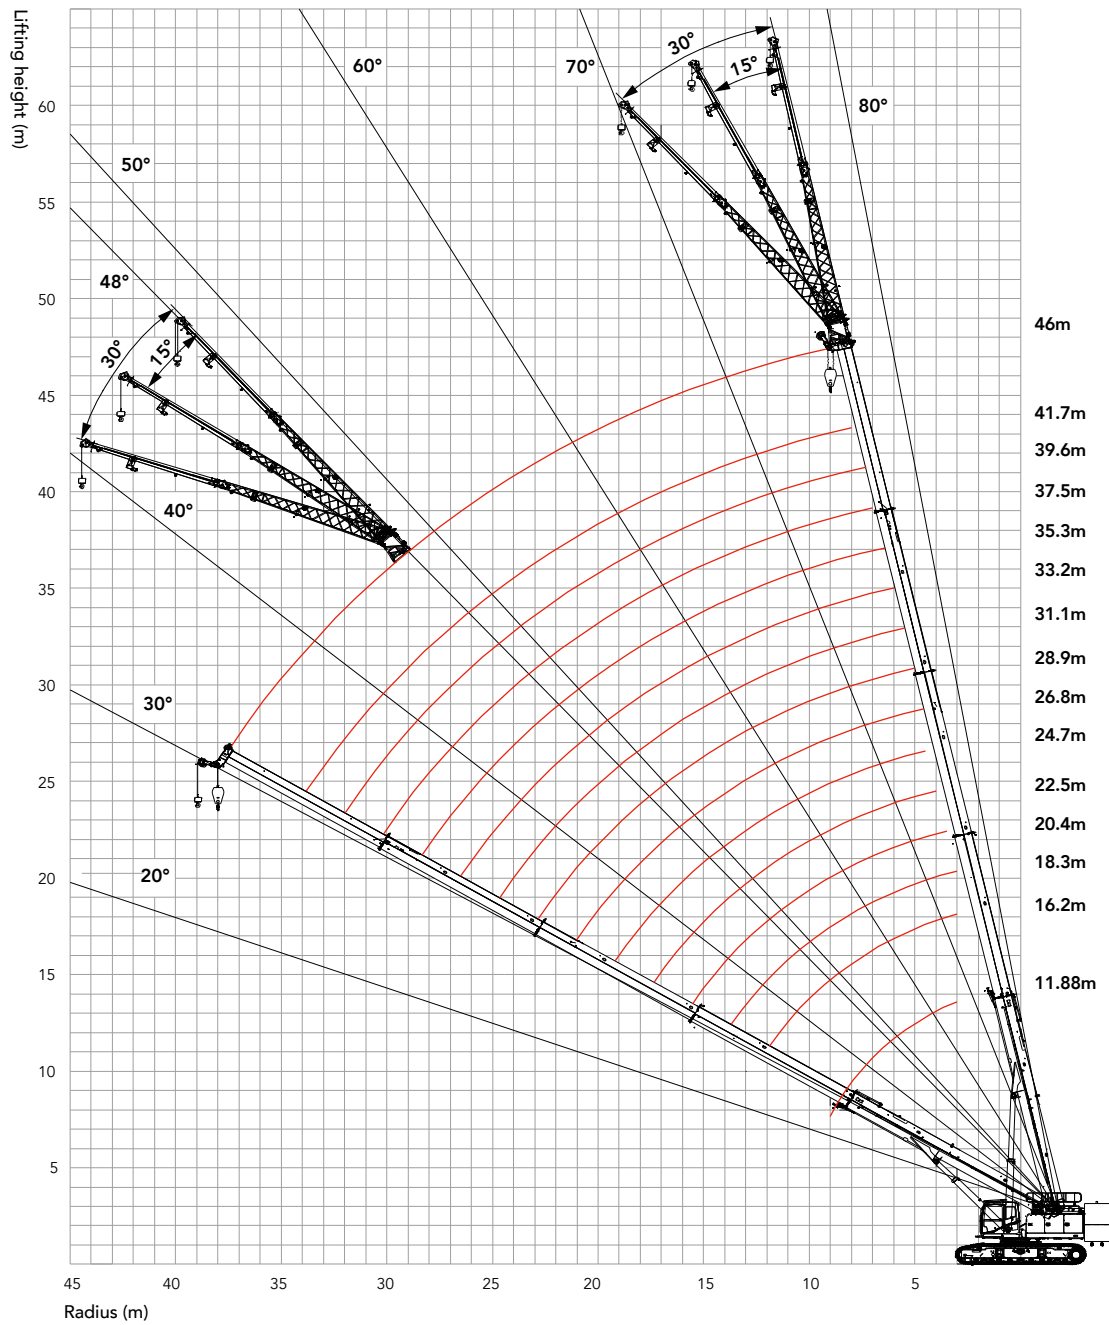

Load chart of H

SCC600TB Telescopic Boom Crawler Crane-H Configuration								
Counterweight: 19t, Crawler fully extended								
Radius (m)	11.88	16.2	20.4	26.8	33.2	39.6	46.0	Radius (m)
3	60	46						3
3.5	51.5	46	36					3.5
4	48	46	36					4
4.5	45	44	36	28				4.5
5	44	41.5	34	28				5
5.5	38	37.5	32	28				5.5
6	34	33.5	30.5	27	20			6
6.5	31.5	30	27.4	26	20			6.5
7	29	27.1	24.8	23.9	20			7
7.5	26	24.7	22.6	21.9	19.5	14.5		7.5
8	23.4	22.5	20.7	20.2	18.5	14.5		8
9	19.2	18.5	17.5	17.3	16.8	13.7	10	9
10		15.4	15	15	14.7	13	10	10
11		13	12.7	13.1	13	12.2	9.8	11
12		11.1	10.8	11.5	11.5	11.3	9.5	12
14			7.9	8.9	9.2	9.1	8.5	14
16			5.9	6.9	7.4	7.5	7.4	16
18				5.4	5.9	6.2	6.2	18
20				4.2	4.7	5.1	5.2	20
22				3.2	3.8	4.2	4.3	22
24					3	3.4	3.6	24
26					2.3	2.7	3	26
28					1.8	2.2	2.4	28
30						1.7	1.9	30
32						1.3	1.5	32
34							1.2	34
36							0.9	36
38							0.6	38
Parts of line(n)	12	10	8	6	5	4	3	Parts of line(n)
Telescoping Cylinder 1	0	50	100	100	100	100	100	Telescoping Cylinder 1
Telescoping Cylinder 2	0	0	0	25	50	75	100	Telescoping Cylinder 2
Min. Angle	0	0	0	0	0	31	30	Min. Angle

Unit: t

Load chart of FJ

SCC600TB Telescopic Boom Crawler Crane-FJ Configuration							
Counterweight:19t, Crawler fully extended							
Boom angle (°)	46+9.2			46+16			Boom angle (°)
	0°	15°	30°	0°	15°	30°	
78	5	3.3	2.5	3	2	1.4	78
77	4.9	3.2	2.5	2.9	1.9	1.35	77
75	4.8	3.1	2.5	2.8	1.8	1.3	75
74	4.7	3.05	2.4	2.7	1.7	1.25	74
73	4.5	3	2.4	2.6	1.65	1.2	73
70	4	2.8	2.3	2.5	1.5	1.2	70
67	3.7	2.6	2.1	2.3	1.4	1.15	67
64	3.2	2.5	1.95	2.15	1.3	1.1	64
61	2.8	2.15	1.8	2	1.2	1	61
58	2.3	1.85	1.6	1.8	1.1	0.95	58
55	1.85	1.6	1.4	1.5	1.05	0.85	55
51	1.25	1.1	1	1	0.9	0.65	51
48	0.95	0.85	0.8	0.75	0.65	0.5	48

Note-Rate load of crane:

1. The rated capacity in the load charts are calculated when the crane is parking on firm and level ground less than 1° gradient, and lifting the load slowly and steadily.
2. The rated capacity values in the load charts are obtained when the wind speed is lower than 9.8 m/s on 75% of tipping load.
3. The gray-shaded values in boom load chart are determined by boom strength, and the rest of values by stability; The load chart of FJ is determined by boom and jib strength.
4. All values in the load charts are valid for 360° slewing.
5. The rated load shall be no more than 5.2t when using boom tip sheave. If the jib unfolds, the rated lifting capacity of boom is 2t less.
6. The rated capacity in the load charts include the weight of lifting hook,(main hook 0.61t, jib hook 0.1t) , therefore, the actual rated capacity shall deduct the weight of lifting hook, riggings and wire rope from the rated load in the load charts.
7. If the actual boom length and working radius is between two values above, the larger one is available.
8. Rear counterweight: 19t.
9. The largest gradient allowed for lifting is 4°; Check Operation Manual for load charts in details.



Zhejiang SANY Equipment Co., Ltd.

SANY Industrial Park, No. 2087 Daishan Road, Wuxing District, Huzhou City,
Zhejiang Province, P. R. of China Zip 313028

After-sales Service 400 887 8318

Consulting 400 887 9318

— Agent information —

Due to updated technology, the technical parameters and configurations are subject to change without prior notice. The machine in the picture may include additional equipment. This album is for reference only, subject to the object.

All rights reserved for Sany, without the written permission of Sany, the contents of any part of this content shall not be copied or copied for any purpose.

© Printed in December 2020 in China

www.sany.com.cn



Please scan the official
WeChat account of Sany
for more information.