



全地面起重机 / All Terrain Crane


XCA300U



331 USt



262.5 ft



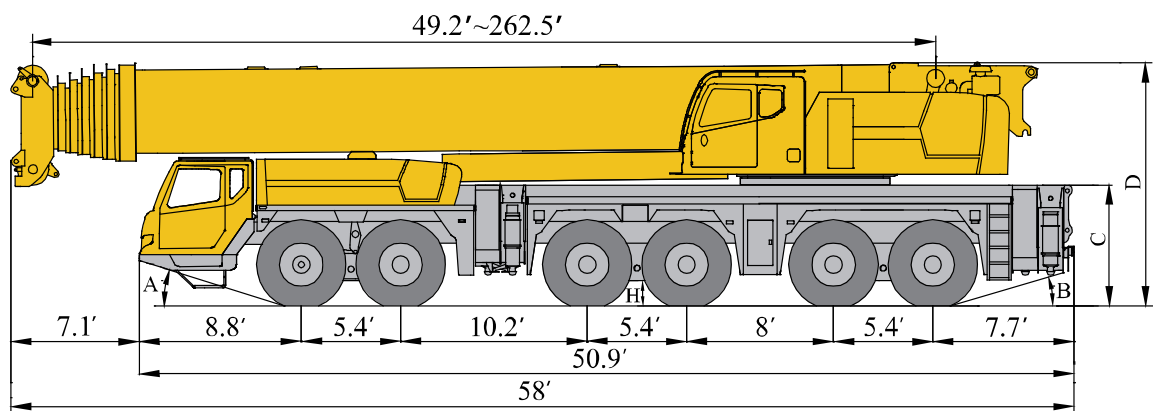
387 ft



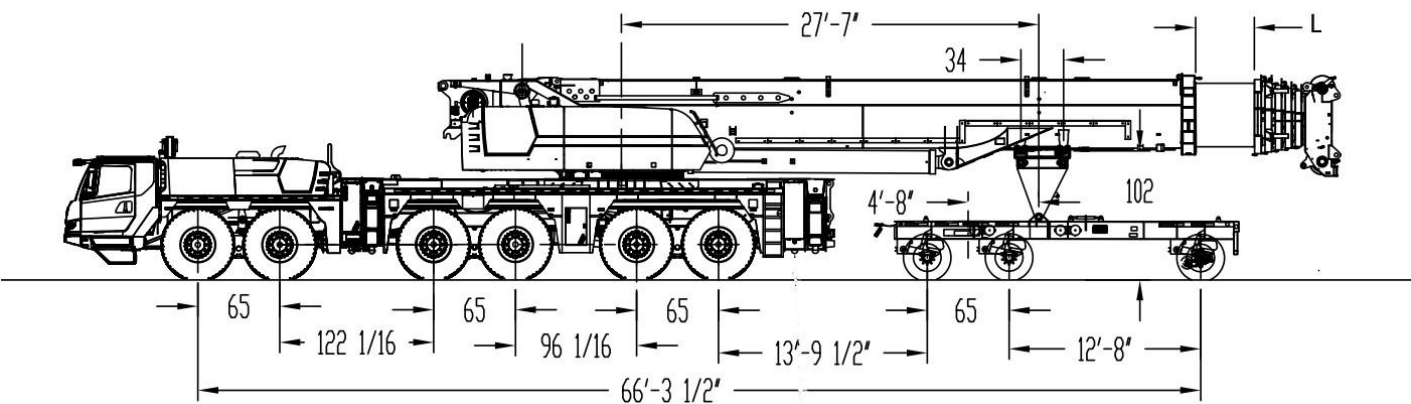
目录 Content	
尺寸参数 Dimensions	3-4
技术规格 Product Specifications	5-8
重量/作业速度 Weight / Working speeds	9
平衡重 Counterweight	10
臂架组合方案 Boom / Jib combinations	11-14
主臂 Boom	15-25
主臂+超起 Boom + Super lifting	26-32
主臂+轻型副臂 Boom + Light jib	33-38
主臂+副臂+超起 Boom + Jib + Super lifting	39-52
主臂+风电臂+超起 Boom + Wind power jib + Super lifting	53-54
符号标识 Description of symbols	55
注意事项 Notes	56

尺寸参数

Dimensions



尺寸参数
Dimensions



	445/95 R 25 (16.00 R 25)			385/95 R 25 (14.00 R 25)			525/80 R 25 (20.5 R 25)			L in
	轴荷状态 lb State of axle load lb	1-2轴 1~ 2 axle	3-6轴 3~6 axle	DOLLY	1-2轴 1~ 2 axle	3-6轴 3~6 axle	DOLLY	1-2轴 1~ 2 axle	3-6轴 3~6 axle	
20000lb Removal rear outriggers	29982	79188	59385	29498	78220	59385	30737	80692	59385	3.87ft
22000lb	25132	87036	60846	24648	86068	60846	25884	88540	60846	7.54ft

说明：上述为理论计算值，桥荷根据实际配置的小车的不同会有所变化
Note：the above are theoretical values, axle load may vary with the actual configuration of boom dolly

技术规格

Technical specifications



底盘

车架	徐工设计、制造，全覆盖式走台板，倒梯形截面结构，高强度钢材制造。
支腿	4支腿，H形布置，采用双级水平支腿，水平伸缩和垂直伸缩由液压控制，底盘两侧装有电控操纵控制台，控制台板装有夜光水平仪、照明灯和增速按钮；带推拉式支脚盘，有全收、半伸、75%伸和全伸作业位置，并装有支腿压力检测与保护装置，提升作业安全性。
发动机	OM473LA.E4-2，直列六缸水冷电控柴油发动机，戴姆勒制造，额定功率576.6hp /1700rpm，最大扭矩2028.31b-ft /1300rpm，EPA Tier4f / CARB Tier4f / EU Stage4 排放标准。燃油箱容积：118.9gal。
液压系统	双联变量泵通过取力器联接至发动机，用于支腿、转向、悬挂和散热。
变速箱	美国艾利逊电控液力变矩变速箱，6个前进档，1个倒档，带缓速制动。
分动箱	德国KESSLER机械式分动箱，装有应急转向油泵。
车桥	德国KESSLER高强度车桥，配备气控盘式制动器。4桥带脱桥装置，正常公路行驶1、3、5桥驱动，复杂路面1、3、4、5桥驱动。
悬挂	所有车桥均采用油气悬挂系统，减震效果好，具有自动调平、悬架升降、弹性刚性转换等功能。 悬架油缸行程：-5.1in ~ +5.1in。
轮胎	12个轮胎，每桥均装单胎，米其林制造，承载力大。 轮胎规格：445/95R25 (16.00R25)

转向

全桥转向，采用先进的电液比例转向控制技术，可适应多种工况的要求，实现多种转向模式。

制动

行车制动：双回路气压制动，作用于所有车轮。
驻车制动：弹簧贮能制动，作用于2-6轴车轮。
辅助制动：发动机制动，变速箱缓速制动。

驾驶室

新型钢结构豪华全宽驾驶室，采用悬浮式连接结构，后部装有减震器。配备电动升降器的安全玻璃、可调式座椅、电动调节后视镜、可调节高度及角度方向盘，倒车显示器、大屏幕彩色液晶显示器等。新型组合式中控台布局安全合理，采用圆弧造型，体现人性化的设计。
标配冷暖空调。

电气系统

直流24伏特，2个电池串联。



上车

结构

徐工设计、制造，高强度钢材制造。

上车发动机

OM936LA.E4/3，直列六缸水冷电控柴油发动机，戴姆勒制造，额定功率281.6hp /2200rpm，最大扭矩848.21b-ft /1200 ~ 1600rpm，EPA Tier4f / EU Stage4 排放标准。
燃油箱容积：76.6gal。

液压系统

上车发动机驱动变量泵，用于起升、变幅、伸缩和回转。采用进口电液换向阀，与变量柱塞泵进行良好的匹配，启停平稳，大功率风冷式液压油冷却器，有效降低系统油温。

技术规格

Technical specifications

操纵方式	先导电比例操纵，无级调速，由左右2个操纵手柄控制起重机的全部动作。
主起升机构	由液压马达驱动，内置行星齿轮减速器和常闭式制动器。双折线绳槽卷筒，进口钢丝绳，配置袋式索具。
回转机构	单排四点接触球式外齿式回转支承，双回转机构，由液压马达驱动，内置行星齿轮减速器和常闭式制动器，可连续回转360°，具有动力控制或自由回转的功能，可无级调速。
操纵室	带大圆弧玻璃，外开式车门，可调式座椅，装有安全玻璃和顶部保护栏，配备力矩限制器、电控箱、电动前窗刮水器、发动机动力加速踏板、发动机起动开关、前窗遮阳帘等。 标配冷暖空调。
安全装置	液压平衡阀、液压溢流阀、液压双向锁、力矩限制器；操纵杆弹簧式回中系统；三圈保护器，防止钢丝绳过放；臂头设置高度限位，防止钢丝绳过卷；风速仪，检测高空风速。
力矩限制器	当实际力矩接近过载时，发出听视觉警报，并在过载之前自动停止危险动作。具有超载记忆功能（黑匣子）和故障自诊断功能。
组合配重	总重220461lb，有0lb、44093lb、88185lb、132277lb、176369lb和220461lb六种组合方式。
电气系统	直流24伏特，2个电池串联。

产品各部件明细如上所述，具体部件明细请参照产品报价单

	臂架系统
主臂	7节，“U”形截面的筒形焊接结构。单缸插销伸缩机构，1个装有安全阀的双作用的伸缩油缸，控制所有吊臂的伸缩，有46%、92%和全伸模式可供选择。 主臂长度：49.2ft ~ 262.5ft。
选装配置	
副起升机构	由液压马达驱动，内置行星齿轮减速器和常闭式制动器。双折线绳槽卷筒，进口钢丝绳，配置袋式索具。
固定副臂	桁架式结构，有0°、20°和40°三种安装角度。 固定副臂长度：19.7ft ~ 118.1ft。 风电检修臂长度：26.2ft。
轻型副臂	桁架式结构，有0°、20°和40°三种安装角度。 固定副臂长度：37.4ft ~ 129.3ft。
臂端单滑轮	单滑轮，安装在主臂顶端用于单股钢丝绳起重作业，起重性能对应主臂工况性能，但最大起重量不超过24691.9lb。
超起	Y型，安装在基本臂端部，双倍率超起钢丝绳设计，使超起拉力成倍提升。 大臂长状态下挠度减小20% ~ 30%，起重性能成倍提升。
轮胎	12个轮胎，每桥均装单胎，米其林制造，承载力大。 轮胎规格：385/95R25（14.00R25）或525/80R25（20.5R25）
制动	电涡流缓速制动，安全可靠，延长制动摩擦片使用寿命。

技术规格

Technical specifications



Chassis

Frame	Designed and manufactured by XCMG, with all covered walking surface, made of imported high strength steel with inverted trapezoid cross section.
Outrigger	4 outriggers, H-shaped arrangement, lateral and vertical outrigger controlled by the hydraulic. Both sides of the chassis equipped with electronic control console, luminous level gauge, lamp and accelerator buttons. Fully retracted, half-extended, 75% extended and fully extended positions and push-pull outrigger floats are available. Out-rigger pressure detection and protective system contributes to improved operation safety.
Engine	OM473LA.E4-2, in-line six-cylinder water-cooled EFI diesel engine, manufactured by Daimler, rated power 576.6hp / 1700 rpm, max. torque 2028.31b-ft / 1300 rpm, EPA Tier4f / CARB Tier4f / EU Stage4 emission standards. Fuel tank capacity : 118.9gal.
Hydraulic system	The Twin-variable variable displacement pump is connected to the engine through PTO for controlling the movements of outriggers, steering, suspension and heat dissipation.
Gearbox	Electric controlled transmission with hydraulic torque converter imported from Allison America, equipped with retarded brake, with 6 forward gears and 1 reverse gears available
Transference	Mechanical transfer box is originally imported from KESSLER Germany, equipped with an emergency steering oil pump.
Alxes	High strength axle with reliable performance, imported originally from KESSLER Germany, equipped with pneumatically controlled drum brake. The 4th axle is fitted an axle-disconnecting device. 1st, 3rd and 5th alxes driving is applied during normal road travel, and 1st, 3rd, 4th and 5th alxes driving on complex road conditions.
Suspension	Hydro-pneumatic suspension is adopted for all axles, providing good shock absorbing effect. Functions of automatic leveling, suspension lifting, elastic/rigid state switch-over, etc. are available. Stroke of suspension cylinder: -5.1in ~ +5.1in.
Tires	12 tires, each axle is equipped with single tire, manufactured by Michelin, large bearing capacity. Tire specifications: 445/95R25(16.00R25).

Brakes	Service brake: double-circuit air pressure brake, acting on all wheels. Parking brake: spring energy brake, acting on wheels of 2-6 axles. Auxiliary brake: engine brake, transmission retarded brake.
Steering	All axles steering, advanced electro-hydraulic proportional steering control is suitable for various demands of working conditions, some steering modes followed may be realized.
Driver's cab	New type steel structure full dimension cab with suspension connecting structure, and there is shock absorb fitted at the rear of the cab, equipped with adjustable seats, safety glass of electrically operated door window lift , electric-adjustable mirrors, steering wheel adjustable in height and angle, reverse displayer, large screen liquid crystal display. Combined control panel reasonably arranged ergonomically designed concept. Heater and air conditioner are standard.
Electrical System	DC 24 volts is in series with two 12-volt battery packs.



Superstructure

Frame	Designed and manufactured by XCMG, made of high-strength steel.
Superstructure engine	OM936LA.E4/3 , in-line six-cylinder water-cooled EFI diesel engine, manufactured by Daimler, rated power 281.6hp / 2200 rpm, max. torque 848.21b-ft / 1200 ~ 1600 rpm, EPA Tier4f / EU Stage4 emission standards. Fuel tank capacity : 76.6gal.
Hydraulic system	Variable pump driven by superstructure engine, used for hoisting, elevating, telescoping and slewing operation. Imported electro-hydraulic direction valve, matching perfectly stably. Large power Air-cooled hydraulic oil cooler, which may effectively reduce the temperature of oil in the system.
Operating mode	Variable continuous speed regulation. Electric proportional pilot control of all operation of hydraulic pump and proportional valve to control the crane by 2 control handle.
Main winch system	Hydraulic controlled speed regulation, with groove drum equipped, driven by hydraulic variable motor through planetary gear reducer, and with built-in constant closed brake, equipped with imported wire rope and pouch socket.

技术规格

Technical specifications

Slewing system	Single row four-point ball contact external gearing slewing ring and right-arranged double slewing mechanism. driven by a hydraulic motor, with a planetary gear reducer and a normally closed brake equipped, for 360° continuous rotation. Power control and free slewing function as well as stepless speed regulation are available.
Operator's cab	Large arc glass, swing-out door, adjustable seat , equipped with safety glass and top protective rails, LMI, controller box, electric wind shield wipers, engine accelerator pedal, engine start switch and windshield visor, etc. are also available. heater and air conditioner are standard.
Safety devices	Hydraulic balance valve, Hydraulic relief valve, Double-way hydraulic valve, LMI. Spring centering system for control levers. Lowering limiter for preventing wire rope from over-releasing. Anti-two block at boom head for preventing wire rope from over-winding. Anemometer for measuring the wind velocity.
LMI	The safety protection device is installed in operator's cab. When actual moment approaches overload value, it may send out visual alarm, and automatically stop dangerous movements before overloading. Overload memory function (black box) and fault self-diagnosis function are available.
Combined counterweight	Total weight is 220461lb. 6 counterweight combinations of 0lb, 44093lb, 88185lb, 132277lb, 176369lb and 220461lb are available.
Electrical System	DC 24 volts is in series with two 12-volt battery packs.



Boom system

Boom	7-section, U-shape cross section, welding structure. Single-cylinder pinning interlocked telescoping system. One double-acting cylinder with safe valve assemblies used for control of the telescoping movement of all booms, 46%, 92% and 100% telescoping pattern are available. Boom length:49.2ft ~ 262.5ft.
------	---

Additional equipment

Auxiliary winch system	Hydraulic controlled speed regulation, with groove drum equipped, driven by hydraulic variable motor through planetary gear reducer, and with built-in constant closed brake, equipped with imported wire rope and pouch socket.
Jib	Lattice welding structure, with 0° , 20° and 40° jib offset angles available. Jib length: 19.7ft~118.1ft. Length of wind power jib: 26.2ft.
Light jip	Lattice welding structure, with 0° , 20° and 40° jib offset angles available. Light jib length: 37.4ft~129.3ft.
Single top	Installed at the boom top, used for single line operation. Its lifting performance is the same as that for boom, but the max. lifting load could not exceed 24691.9lb.
Super-lifting	Y-type super lifting device may be installed at the end of the basic boom. The design of two parts of line super lifting wire rope enables the pulling force of the super lifting double improving. With the super lifting device, under longer boom length, the boom deflection may be reduced by 20%-30%, and the lifting performance be doubled.
Tires	12 tires, each axle is equipped with single tire, manufactured by Michelin, large bearing capacity. Tire specifications:385/95R25 (14.00R25) or 525/80R25 (20.5R25) .
Brake	Eddy-current retarder brake, which are safe and reliable, and will prolong the service life of brake lining.

Product parts details As mentioned above, please refer to the product quotation for specific parts.

重量
Weight



车桥 Axle	1	2	3	4	5	6	总重量 Total weight
lb	27595	27595	26639	26639	26639	26639	161820



吊钩 Hook	倍率 No. of lines	吊钩重量 Weight lb	备注 Remarks
154 USt	14	4259.4	双钩 Double hook , 选配Optional
121 USt	11	3192.3	双钩 Double hook , 标配Standard
88 USt	7	4045.5	双钩 Double hook , 标配Standard
33 USt	3	3176.9	单钩 Single hook , 标配Standard
13USt	1	1009.7	单钩 Single hook , 选配Optiona

作业速度
Working speeds

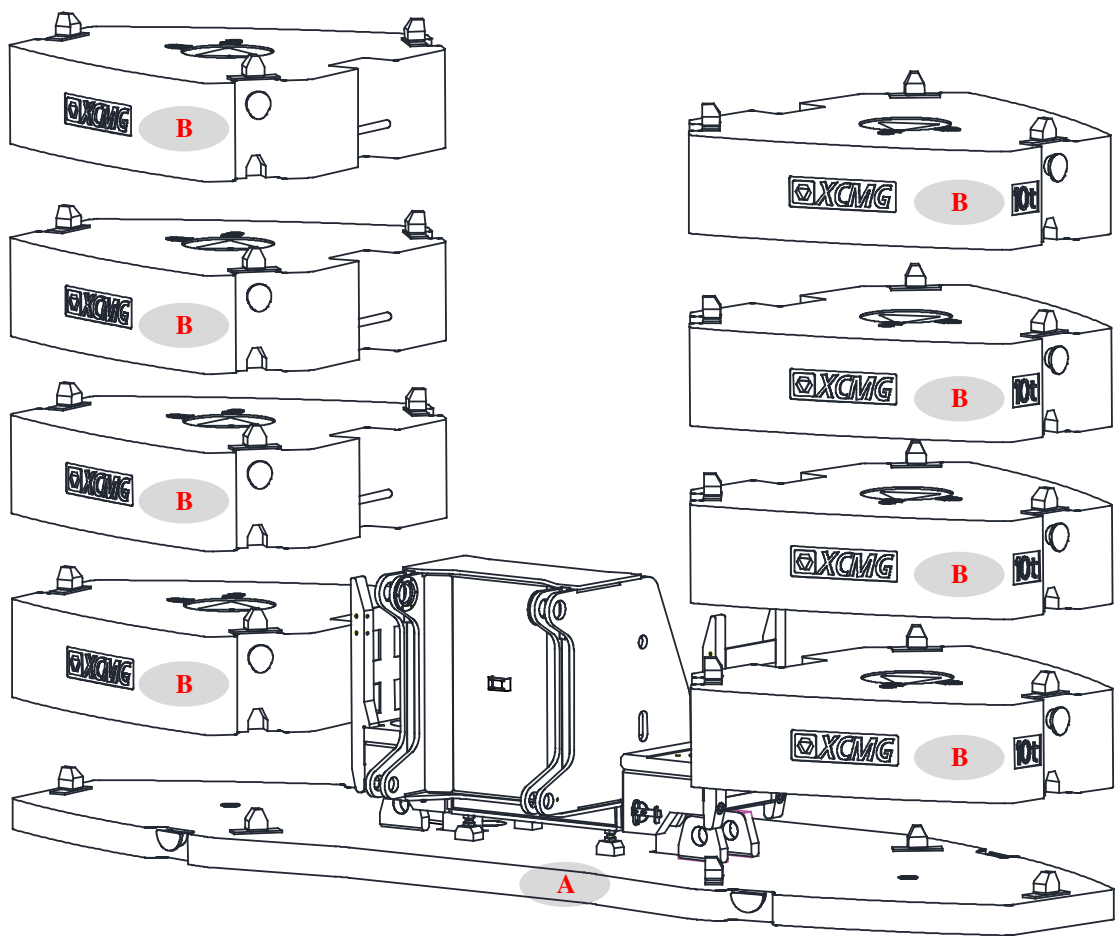


445/95 R 25 (16.00 R 25)	1.24 ~ 55.9	52%
385/95 R 25 (14.00 R 25)	1.24 ~ 51.5	60%
525/80 R 25 (20.5 R 25)	1.24 ~ 55.9	52%



作业机构 Drive	作业速度 Working speed	最大单绳拉力 Max. single line pull	钢丝绳直径/长度 Rope diameter/ length
	0-416.7 fpm , 单绳 , 第5层 , 空载 fpm, single line,5th layer, no load	24691.9 lb	0.9 in/1213.9 ft
	0-416.7 fpm , 单绳 , 第5层 , 空载 fpm, single line,5th layer, no load	24691.9 lb	0.9 in/1213.9 ft
	0-1.2 r/min		
	从-1°抬起至83°约85s Approx. 85s for boom elevation from -1° to 83°		
	从49.2ft伸出至262.5ft约900s Approx. 900s for boom extension from 49.2ft to 262.5ft		

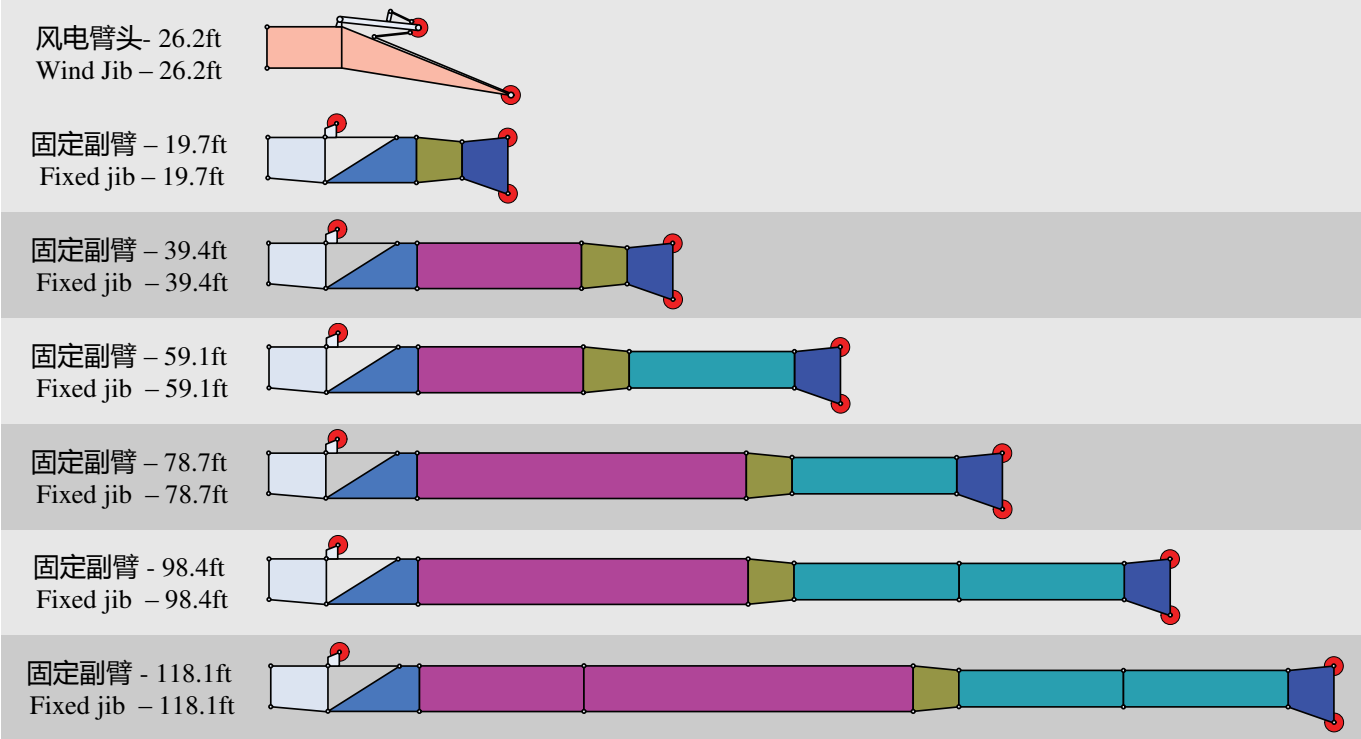
平衡重
Counterweight



平衡重 Counterweight	A	B
尺寸 (长×宽×高) ft Size (L×W×H) ft	22.3×7.5×5.6	6.6×7.2×2
重量 lb Weight lb	44093	22046

工况模式 Working mode	220461 lb	176369 lb	132277 lb	88185 lb	44093 lb
组合形式 Combinations	A+B×8	A+B×6	A+B×4	A+B×2	A

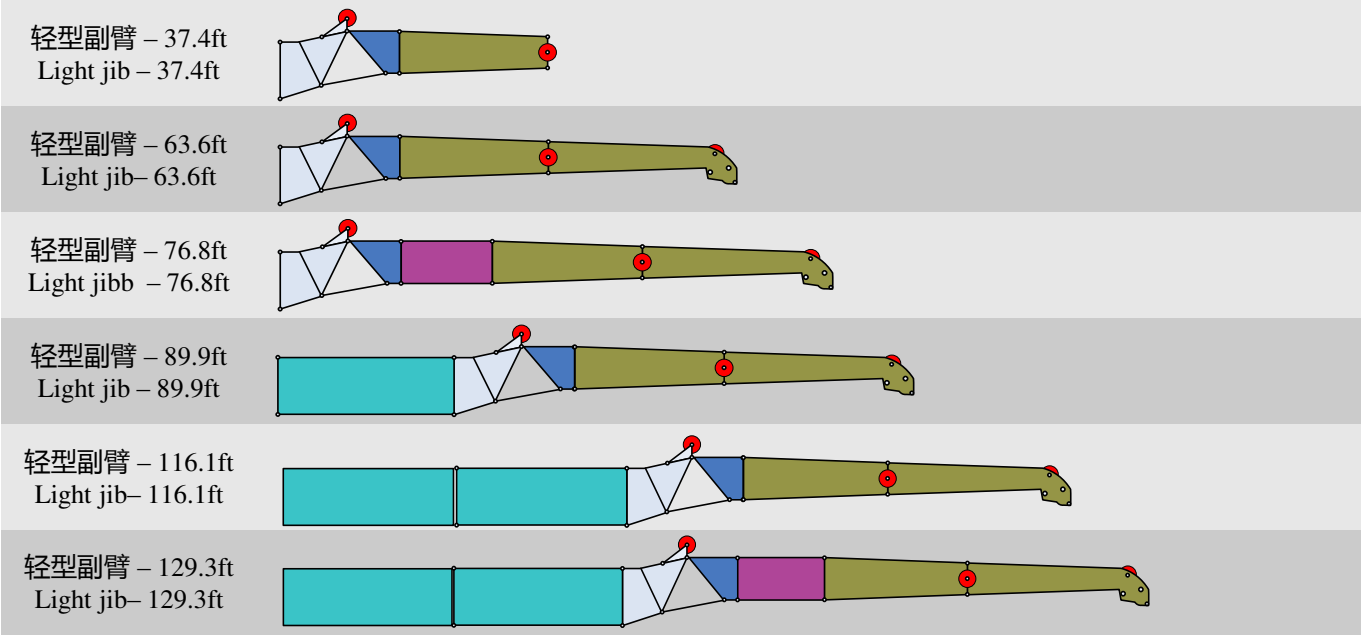
臂架组合方案
Boom / Jib combinations




部件 Component	结构形式 Structure	尺寸 (长×宽×高) ft Size (L×W×H) ft	重量 lb Weight lb
连接架 Connection bracket		6.2×4.9×5.9	1770
旋转架 Swinging bracket		11.2×4.9×4.9	3411
副臂加长节 I Jib extension I		20.3×4.9×4.6	1692
副臂加长节 II Jib extension II		20.3×4.3×3.6	3132
副臂加长节 III Jib extension III		40×4.9×4.6	3101
过渡节 Transition section		5.6×4.9×4.6	619
臂头 Head section		4.1×6.2×6.2	1103
风电臂头 Wind jib		27.9×3×8.2	2359

臂架组合方案

Boom / Jib combinations



部件 Component	结构形式 Structure	尺寸 (长×宽×高) ft Size (L×W×H) ft	重量 lb Weight lb
连接架 Connection bracket		10.1×3.0×6.0	905
旋转架 Swinging bracket		10.5×3.6×3.9	988
一节副臂总成 First jib section assembly		25.0×3.0×3.8	1295
二节副臂总成 Second jib section assembly		26.4×1.8×2.3	934
加长节 I Insert I		26.8×2.6×4.5	1615
加长节 II Insert II		13.5×3.0×3.8	715

臂架组合方案
Boom / Jib combinations



主臂
Telescopic boom

T : 49.2~262.5 ft

超起主臂
Super lifting telescopic boom

T : 98.1~262.5 ft

超起风电臂
Super lifting wind jib

T:245.4~262.5 ft
W:26.2 ft

臂架组合方案
Boom / Jib combinations



固定副臂
Fixed jib

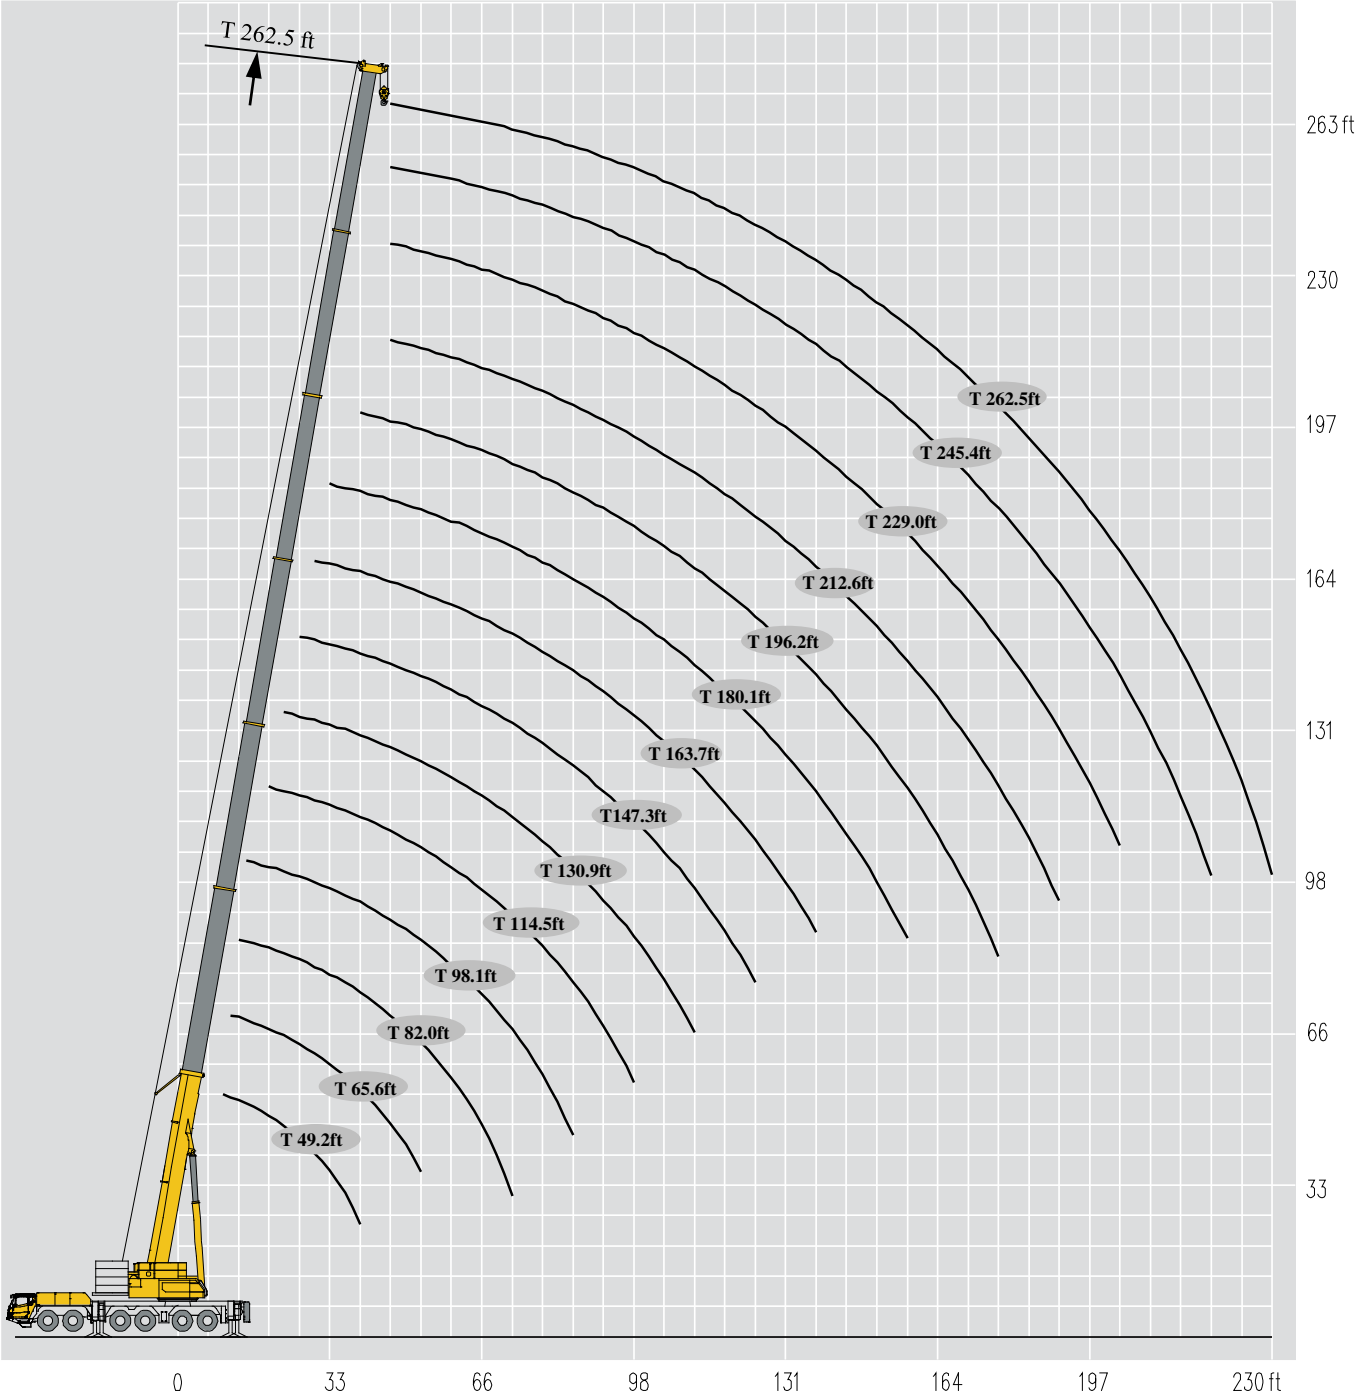
T : 147.3~245.4 ft + 7 ft
F : 19.7~118.1 ft

轻型副臂
Light jib

T : 147.3~262.5 ft
F : 37.4~129.3 ft

超起固定副臂
Super lifting fixed Jib



T : 147.3~245.4 ft + 7 ft
F : 19.7~118.1 ft



起重性能表

Lifting capacities




T 49.2~147.3ft

  										
	49.2 ft	65.6 ft	65.6 ft	65.6 ft	82.0 ft	82.0 ft	82.0 ft	98.1 ft	98.1 ft	
9.8	303.1									9.8
11.5	303.1	303.1	297.6	303.1						11.5
13.1	303.1	303.1	286.6	297.6						13.1
14.8	303.1	303.1	269.0	297.6	284.4	284.4	284.4			14.8
16.4	303.1	299.8	242.5	297.6	275.6	284.4	275.6	245.8	245.8	16.4
19.7	299.8	299.8	216.1	275.6	253.5	264.6	264.6	242.5	238.1	19.7
23.0	275.6	266.8	187.4	264.6	253.5	260.1	242.5	220.5	218.3	23.0
26.2	253.5	242.5	176.4	229.5	229.1	231.7	220.7	212.7	211.4	26.2
29.5	227.1	220.5	156.5	211.2	207.2	210.3	202.2	203.7	201.1	29.5
32.8	198.4	187.4	143.3	194.4	181.9	187.4	185.2	184.1	181.7	32.8
36.1	176.4	169.8	132.3	176.4	169.8	172.0	177.5	170.6	167.1	36.1
39.4	162.0	154.3	121.3	159.8	149.9	155.4	157.9	156.3	151.7	39.4
42.7		142.2	110.2	143.7	140.7	142.0	143.7	132.7	130.1	42.7
45.9		127.0	102.5	131.4	125.7	127.9	133.6	123.7	122.6	45.9
52.5		105.8	90.4	110.2	106.3	110.7	115.7	108.5	105.6	52.5
59.1					90.4	95.7	97.0	92.4	89.9	59.1
65.6					75.4	82.5	86.0	81.4	75.0	65.6
72.2								69.7	65.9	72.2
78.7								56.4	57.3	78.7
85.3								51.8	48.5	85.3
组合 combi nation	000000	001000	000010	000100	110000	011000	001100	111000	210000	组合 combi nation

  										
	98.1 ft	114.5 ft	114.5 ft	114.5 ft	130.9 ft	130.9 ft	130.9 ft	147.3 ft	147.3 ft	
16.4	245.8	205.0	205.0	205.0						16.4
19.7	233.3	205.0	205.0	200.6	184.1	184.1	156.5			19.7
23.0	213.4	205.0	200.6	194.0	176.4	184.1	149.9			23.0
26.2	199.3	198.4	197.3	187.4	165.3	176.4	143.3	122.1	134.5	26.2
29.5	184.5	187.4	185.2	169.8	159.5	165.3	132.3	116.6	130.1	29.5
32.8	165.6	172.0	169.3	159.8	151.5	158.7	124.6	110.2	125.7	32.8
36.1	153.0	165.3	162.0	148.8	136.7	147.7	117.9	107.6	121.3	36.1
39.4	141.3	149.9	147.9	138.2	128.6	138.9	109.6	101.0	116.8	39.4
42.7	128.3	138.9	134.5	128.1	119.1	127.9	103.6	94.8	111.3	42.7
45.9	121.3	127.9	125.7	122.6	114.1	119.1	94.8	93.6	105.8	45.9
52.5	107.8	108.0	105.8	110.2	97.7	101.4	86.0	87.2	97.0	52.5
59.1	93.0	92.6	90.4	95.0	81.3	84.9	75.0	78.0	88.2	59.1
65.6	80.9	79.4	76.7	83.3	73.5	77.2	73.9	78.0	81.6	65.6
72.2	70.5	68.3	67.2	73.9	64.6	68.3	65.9	69.0	70.5	72.2
78.7	60.4	60.6	56.2	66.4	55.9	59.5	63.9	61.7	63.9	78.7
85.3	53.4	53.8	51.1	57.5	49.4	52.9	58.0	53.4	56.2	85.3
91.9		46.3	44.5	50.7	43.6	47.4	53.6	50.0	51.6	91.9
98.4		41.4	37.5	43.7	38.2	41.9	49.2	45.4	44.1	98.4
105.0		37.3	33.1	39.0	33.8	37.5	42.5	43.8	40.1	105.0
111.5					29.4	33.1	38.1	38.8	35.9	111.5
118.1					26.5	28.7	33.5	35.9	32.8	118.1
124.7								32.6	29.8	124.7
131.2								29.8	24.7	131.2
组合 combi nation	021000	111100	211000	011110	211100	111110	011111	111111	211110	组合 combi nation

起重性能表
Lifting capacities

T 147.3~262.5ft



    											
	147.3 ft	163.7 ft	163.7 ft	163.7 ft	180.1 ft	180.1 ft	180.1 ft	196.2 ft	196.2 ft		
26.2	125.7									26.2	
29.5	121.3									29.5	
32.8	116.8	116.8	114.6	112.4	110.2					32.8	
36.1	112.4	112.4	110.2	106.9	92.6	88.2	68.3			36.1	
39.4	108.0	105.8	108.0	102.7	92.6	88.2	68.3	71.7	68.3	39.4	
42.7	104.7	97.0	101.4	92.2	88.2	86.0	68.3	71.7	68.3	42.7	
45.9	99.2	96.1	99.2	90.6	86.0	83.8	66.1	71.7	68.3	45.9	
52.5	90.4	87.1	88.2	81.4	79.4	75.0	61.7	68.3	66.1	52.5	
59.1	79.4	79.4	77.2	70.5	72.8	68.3	60.0	63.7	62.0	59.1	
65.6	74.1	71.2	66.1	66.1	62.8	61.7	55.6	60.6	58.6	65.6	
72.2	64.8	65.0	61.7	60.4	58.4	55.1	52.7	57.3	54.0	72.2	
78.7	56.9	57.1	54.7	51.4	54.0	50.7	50.5	52.7	48.9	78.7	
85.3	49.4	54.0	49.8	48.5	48.9	46.3	46.3	46.5	44.3	85.3	
91.9	46.3	48.3	44.1	44.5	46.3	43.2	40.1	44.1	40.3	91.9	
98.4	41.9	43.7	41.9	43.2	42.8	40.1	36.4	39.7	37.5	98.4	
105.0	37.7	38.8	35.3	40.3	39.0	36.6	34.2	37.5	34.8	105.0	
111.5	33.3	37.3	33.1	39.7	35.3	32.6	32.4	34.2	30.9	111.5	
118.1	30.9	32.2	28.7	35.7	33.7	30.4	29.3	32.0	28.7	118.1	
124.7	27.6	29.1	28.2	33.1	30.0	26.7	26.9	29.8	26.5	124.7	
131.2	23.1	26.5	25.6	28.9	26.5	24.9	26.5	26.9	24.3	131.2	
137.8		24.3	22.0	26.9	24.3	22.0	25.6	25.6	23.1	137.8	
144.4		22.0	19.8	26.5	23.1	21.4	23.4	24.3	21.8	144.4	
150.9		19.8	17.6	24.5	18.7	17.6	22.3	22.0	20.1	150.9	
157.5					17.0	15.9	20.5	20.1	17.6	157.5	
164.0								17.6	16.5	164.0	
170.6								15.9	15.4	170.6	
177.2								13.2	12.3	177.2	
组合 combi nation	221100	211111	221110	121111	221111	222110	122111	222111	222210	组合 combi nation	

	196.2 ft	212.6 ft	212.6 ft	212.6 ft	229.0 ft	229.0 ft	245.4 ft	262.5 ft	
39.4	66.4								39.4
42.7	64.4								42.7
45.9	62.6	55.6	48.7	43.2					45.9
52.5	58.6	55.6	46.5	41.0	42.1	38.1			52.5
59.1	55.1	52.7	44.1	39.0	42.1	36.8	33.1	26.9	59.1
65.6	51.1	48.9	42.1	36.6	40.1	35.1	33.1	26.9	65.6
72.2	47.2	47.0	39.7	34.6	38.8	33.3	32.4	26.7	72.2
78.7	44.3	44.3	37.5	32.4	36.6	32.0	31.1	26.7	78.7
85.3	41.2	42.3	35.3	30.9	35.3	30.0	30.2	24.7	85.3
91.9	39.0	39.7	33.3	28.2	34.2	28.7	28.4	24.5	91.9
98.4	35.9	36.8	31.3	26.2	33.7	26.2	28.5	24.0	98.4
105.0	33.7	34.6	29.3	24.7	31.7	24.5	27.3	23.4	105.0
111.5	31.5	32.4	28.0	23.6	30.2	23.1	25.1	22.6	111.5
118.1	30.0	30.4	26.0	22.3	28.7	22.3	24.0	21.9	118.1
124.7	28.2	27.8	24.0	21.4	27.1	20.9	23.0	20.9	124.7
131.2	26.5	25.4	22.3	19.8	25.6	19.8	22.1	20.1	131.2
137.8	24.7	23.1	20.9	19.2	23.8	18.7	21.1	19.4	137.8
144.4	22.3	21.4	19.8	18.1	22.0	17.6	19.6	18.3	144.4
150.9	21.2	20.5	18.5	17.6	21.2	16.5	18.1	17.1	150.9
157.5	20.1	19.6	17.4	16.5	19.6	15.4	16.8	16.0	157.5
164.0	19.2	18.7	16.1	16.1	18.3	14.3	15.7	15.1	164.0
170.6	18.1	15.7	15.4	18.1	17.2	13.9	14.3	14.2	170.6
177.2	16.3	14.6	14.3	16.8	16.3	13.0	13.4	13.3	177.2
183.7		13.7	13.7	14.1	15.2	12.6	12.3	12.6	183.7
190.3				13.2	14.3	11.7	11.5	11.7	190.3
196.9					13.2	11.0	10.6	11.1	196.9
203.4					12.3	10.4	9.9	9.9	203.4
210.0							9.3	9.3	210.0
216.5							8.4	8.6	216.5
223.1							7.1	7.3	223.1
229.7								6.6	229.7
组合 combination	122211	222211	122221	112222	222221	122222	222222	333333	组合 combination

起重性能表

Lifting capacities




T 49.2~147.3ft

										
	49.2 ft	65.6 ft	65.6 ft	65.6 ft	82.0 ft	82.0 ft	82.0 ft	98.1 ft	98.1 ft	
9.8	303.1									9.8
11.5	303.1	303.1	264.6	303.1						11.5
13.1	303.1	303.1	261.2	297.6						13.1
14.8	303.1	303.1	246.5	297.6	284.4	284.4	284.4			14.8
16.4	297.6	299.8	222.4	297.6	275.6	284.4	275.6	245.8	245.8	16.4
19.7	264.6	275.6	205.7	264.6	253.5	264.6	264.6	242.5	238.1	19.7
23.0	231.5	224.9	182.1	229.9	230.4	232.8	242.5	220.5	218.3	23.0
26.2	191.4	198.4	162.3	198.6	200.2	193.8	198.4	200.0	196.2	26.2
29.5	164.5	169.8	144.0	172.2	174.4	168.7	178.6	172.0	167.6	29.5
32.8	144.0	147.7	134.0	153.7	154.3	151.0	156.5	148.8	145.5	32.8
36.1	125.0	127.4	119.1	133.2	132.9	130.1	135.6	129.0	129.0	36.1
39.4	114.6	115.7	111.8	121.5	121.5	120.4	123.5	119.3	119.1	39.4
42.7		105.8	101.0	107.1	103.6	105.4	110.2	105.4	103.6	42.7
45.9		101.4	94.6	101.4	97.4	99.2	103.6	96.8	94.6	45.9
52.5		79.4	84.2	82.5	75.6	80.0	85.1	79.4	73.4	52.5
59.1					60.6	65.0	67.2	61.7	57.3	59.1
65.6					45.0	49.6	55.6	49.4	46.3	65.6
72.2								41.4	37.3	72.2
78.7								32.0	28.9	78.7
85.3								27.6	24.5	85.3
组合 combi nation	000000	001000	000010	000100	110000	011000	001100	111000	210000	组合 combi nation

	98.1 ft	114.5 ft	114.5 ft	114.5 ft	130.9 ft	130.9 ft	130.9 ft	147.3 ft	147.3 ft	
16.4	245.8	205.0	205.0	205.0						16.4
19.7	233.3	205.0	205.0	200.6	184.1	184.1	156.5			19.7
23.0	211.6	205.0	200.6	194.0	176.4	184.1	149.9			23.0
26.2	199.3	198.4	197.3	187.4	165.3	176.4	143.3	122.1	134.5	26.2
29.5	172.0	167.6	165.3	169.8	159.6	165.3	132.3	116.6	130.1	29.5
32.8	149.9	145.5	143.3	159.0	151.5	158.7	122.4	110.2	125.7	32.8
36.1	132.3	127.9	125.7	134.5	133.2	139.1	110.2	101.4	121.3	36.1
39.4	121.3	116.8	116.6	122.4	123.7	128.3	105.2	101.0	116.8	39.4
42.7	105.8	103.6	102.5	106.5	104.1	108.0	92.6	94.8	108.0	42.7
45.9	99.2	99.2	97.0	99.4	95.2	100.5	91.9	93.5	105.8	45.9
52.5	79.1	80.7	75.6	84.0	74.1	79.8	86.2	87.1	79.1	52.5
59.1	63.5	61.7	58.6	68.8	59.1	62.0	71.7	69.2	64.2	59.1
65.6	50.9	51.1	47.4	56.9	48.5	55.3	59.5	56.0	52.0	65.6
72.2	40.6	42.3	39.2	47.2	39.9	44.8	48.5	45.4	41.9	72.2
78.7	34.4	35.9	31.1	41.0	34.4	35.3	39.5	37.5	34.4	78.7
85.3	30.0	29.1	26.7	34.2	28.7	30.9	34.8	33.1	28.7	85.3
91.9		25.6	21.6	28.4	23.1	26.5	30.9	28.7	24.7	91.9
98.4		23.4	18.5	26.2	19.8	23.6	26.9	26.5	22.0	98.4
105.0		19.8	15.4	24.0	15.4	20.3	24.5	22.3	19.6	105.0
111.5					12.1	17.6	19.8	19.8	16.1	111.5
118.1					9.9	15.4	17.6	17.9	13.0	118.1
124.7								15.0	10.4	124.7
131.2								12.8	8.2	131.2
组合 combi nation	021000	111100	211000	011110	211100	111110	011111	111111	211110	组合 combi nation

起重性能表
Lifting capacities

T 147.3~262.5ft

										
	147.3 ft	163.7 ft	163.7 ft	163.7 ft	180.1 ft	180.1 ft	180.1 ft	196.2 ft	196.2 ft	
26.2	125.7									26.2
29.5	121.3	116.8	114.6	110.2						29.5
32.8	116.8	114.6	112.4	110.2						32.8
36.1	112.4	108.0	110.2	103.6	92.6	88.2	68.3			36.1
39.4	108.0	105.8	108.0	102.7	92.6	88.2	68.3	71.7	68.3	39.4
42.7	101.4	97.0	101.4	92.2	89.3	86.0	68.3	71.7	68.3	42.7
45.9	99.2	96.1	99.2	90.6	86.0	83.8	66.1	71.7	68.3	45.9
52.5	73.4	79.4	76.7	77.2	79.4	75.0	61.7	68.3	66.1	52.5
59.1	59.1	64.8	61.5	64.8	64.4	62.4	52.9	63.7	62.0	59.1
65.6	48.1	53.8	49.6	56.0	53.1	51.4	48.7	60.6	58.6	65.6
72.2	38.4	44.1	42.3	46.3	45.0	43.0	47.4	48.5	47.4	72.2
78.7	32.0	35.5	34.0	35.1	36.6	34.6	38.8	41.4	40.3	78.7
85.3	25.8	30.9	28.4	31.7	31.1	29.3	33.1	34.6	33.5	85.3
91.9	23.6	26.5	22.7	26.5	26.2	24.5	28.4	28.9	28.0	91.9
98.4	19.8	22.7	21.4	24.3	23.6	21.8	25.8	26.2	25.4	98.4
105.0	17.0	19.8	17.6	22.0	20.7	19.0	22.9	22.3	21.2	105.0
111.5	13.4	17.6	15.4	20.1	18.3	16.5	20.3	18.7	17.6	111.5
118.1	10.4	15.4	12.8	15.9	15.4	13.7	17.4	16.5	15.4	118.1
124.7	8.8	13.0	11.0	14.3	12.8	11.2	15.0	13.9	13.0	124.7
131.2	6.6	11.2	8.8	12.3	11.0	9.5	13.2	11.5	10.6	131.2
137.8		8.8	6.6	10.6	8.8	7.1	10.8	9.3	8.4	137.8
144.4		6.6	4.4	8.4	8.2	6.4	10.1	8.4	7.5	144.4
150.9					6.4	4.6	8.4	6.6	5.7	150.9
157.5					4.4		5.7	5.1	4.4	157.5
164.0								4.4		164.0
组合 combi nation	221100	211111	221110	121111	221111	222110	122111	222111	222210	组合 combi nation

	196.2 ft	212.6 ft	212.6 ft	212.6 ft	229.0 ft	229.0 ft	245.4 ft	262.5 ft	
39.4	66.4								39.4
42.7	64.4								42.7
45.9	62.6	55.6	48.7	43.2					45.9
52.5	58.6	55.6	46.5	41.0	42.1	38.1			52.5
59.1	55.1	52.7	44.1	39.0	42.1	36.8	33.1	26.9	59.1
65.6	51.1	48.9	42.1	36.6	40.1	35.1	33.1	26.9	65.6
72.2	47.2	47.0	39.7	34.6	38.8	33.3	32.4	26.7	72.2
78.7	42.5	44.3	37.5	32.4	36.6	32.0	31.1	26.7	78.7
85.3	39.7	37.0	35.3	27.8	35.3	30.0	30.2	24.7	85.3
91.9	30.9	31.7	33.3	25.4	33.3	28.7	28.0	24.3	91.9
98.4	28.9	27.8	30.2	23.6	31.3	26.2	23.4	23.4	98.4
105.0	24.9	24.0	26.2	22.3	25.1	22.0	22.5	20.5	105.0
111.5	21.2	20.9	23.1	21.2	22.0	20.9	21.2	19.6	111.5
118.1	19.0	18.1	20.5	20.1	19.0	20.1	20.1	18.7	118.1
124.7	16.5	15.7	18.1	19.2	16.5	19.0	18.3	17.4	124.7
131.2	14.1	13.4	15.7	17.9	14.6	17.0	15.9	16.1	131.2
137.8	11.9	11.2	13.9	16.3	12.8	15.0	14.1	14.3	137.8
144.4	11.0	9.5	12.1	14.6	10.8	13.2	12.1	12.3	144.4
150.9	8.8	7.5	10.4	12.8	9.3	11.7	10.4	10.6	150.9
157.5	7.7	6.0	8.8	11.0	7.7	10.4	8.8	8.8	157.5
164.0	6.2	4.6	7.3	9.7	6.0	8.8	7.7	7.7	164.0
170.6	4.9		6.0	8.4	4.4	7.5	6.4	6.6	170.6
177.2			4.4	7.3	4.4	6.2	5.1	4.9	177.2
183.7			4.4	6.2		5.3	4.4	4.4	183.7
190.3				4.4		4.4			190.3
组合 combi nation	122211	222211	122221	112222	222221	122222	222222	333333	组合 combi nation

起重性能表
Lifting capacities

T 49.2~262.5ft

	49.2-262.5ft 29.3ft×28ft 360° 0lb									
	49.2 ft	65.6 ft	65.6 ft	65.6 ft	82.0 ft	82.0 ft	82.0 ft	98.1 ft	98.1 ft	
11.5	303.1									11.5
13.1	286.6	275.6	261.2	297.6						13.1
14.8	253.5	255.7	235.9	264.6						14.8
16.4	220.5	220.5	222.7	218.3	220.5	222.7	220.5			16.4
19.7	191.8	191.8	196.2	194.0	189.6	191.8	196.2	191.8	187.4	19.7
23.0	141.8	144.4	154.3	150.8	137.8	146.2	153.2	144.2	135.8	23.0
26.2	94.1	98.8	104.9	104.3	88.8	95.9	102.1	94.6	87.7	26.2
29.5	63.9	68.3	76.3	73.6	63.9	70.1	75.6	67.0	60.8	29.5
32.8	44.5	50.9	56.0	55.1	44.8	50.5	55.6	47.6	41.9	32.8
36.1	28.7	33.1	40.1	37.5	30.9	36.8	41.9	32.8	26.9	36.1
39.4	23.4	27.8	32.8	30.6	25.8	31.7	36.8	26.7	20.7	39.4
42.7		19.8	23.8	21.6	15.4	22.0	24.3	17.6	13.2	42.7
45.9		16.5	21.4	19.2	13.0	18.5	22.9	15.9	10.6	45.9
52.5		9.0	13.4	11.5	4.4	6.6	11.0	7.3		52.5
59.1							6.2			59.1
组合 combi nation	000000	001000	000010	000100	110000	011000	001100	111000	210000	组合 combi nation

										
	98.1 ft	114.5 ft	114.5 ft	114.5 ft	130.9 ft	130.9 ft	130.9 ft	147.3 ft	147.3 ft	
19.7	191.8									19.7
23.0	146.6	171.5	140.0	159.8						23.0
26.2	96.8	99.2	91.3	107.8	97.9	106.3	114.9			26.2
29.5	66.8	71.0	63.9	78.7	67.9	75.4	83.1	75.2	67.7	29.5
32.8	49.4	51.4	44.8	58.4	50.7	57.5	64.6	56.9	50.0	32.8
36.1	34.4	37.5	28.7	44.1	34.6	41.7	48.7	44.1	37.5	36.1
39.4	28.2	30.4	23.8	37.5	27.3	34.4	41.4	35.9	29.1	39.4
42.7	19.8	22.0	15.4	26.5	19.8	24.3	31.1	26.5	21.4	42.7
45.9	17.4	19.2	13.2	25.8	16.5	22.9	29.3	24.3	17.9	45.9
52.5	8.8	9.5	4.9	13.4	7.7	11.7	17.6	17.6	11.0	52.5
59.1		4.4		8.8		6.6	11.0	11.0	4.9	59.1
65.6				4.4			6.6	5.1		65.6
组合 combi nation	021000	111100	211000	011110	211100	111110	011111	111111	211110	组合 combi nation



										
	147.3 ft	163.7 ft	163.7 ft	163.7 ft	180.1 ft	180.1 ft	180.1 ft	196.2 ft	196.2 ft	
29.5	63.1									29.5
32.8	46.3	56.0	51.8	58.2						32.8
36.1	33.1	41.2	37.0	44.1						36.1
39.4	25.1	35.1	30.9	37.3	32.2	29.5	35.3			39.4
42.7	17.6	26.0	22.0	26.5	24.3	21.8	26.5			42.7
45.9	14.3	21.4	17.4	23.1	20.9	18.3	23.6	21.2	19.8	45.9
52.5	6.6	14.6	11.0	16.1	13.0	10.8	15.7	14.1	12.1	52.5
59.1		7.7	4.4	9.5	7.1	5.1	9.3	7.5	6.4	59.1
65.6				4.4			4.6			65.6
组合 combi nation	221100	211111	221110	121111	221111	222110	122111	222111	222210	组合 combi nation

									
	196.2 ft	212.6 ft	212.6 ft	212.6 ft	229.0 ft	229.0 ft	245.4 ft	262.5 ft	
45.9	24.9								45.9
52.5	16.8	14.6	18.1	20.9					52.5
59.1	10.8	8.8	12.1	15.0	9.9	13.2			59.1
65.6	4.9	4.4	6.6	9.5	4.4	6.6	7.7	7.7	65.6
72.2			4.4	5.1		4.4	4.4	4.4	72.2
组合 combi nation	122211	222211	122221	112222	222221	122222	222222	333333	组合 combi nation

起重性能表

Lifting capacities



T 49.2~147.3ft

										
	49.2 ft	65.6 ft	65.6 ft	65.6 ft	82.0 ft	82.0 ft	82.0 ft	98.1 ft	98.1 ft	
9.8	302.0									9.8
11.5	302.0	302.0	264.6	302.0						11.5
13.1	302.0	302.0	264.6	297.6						13.1
14.8	302.0	297.6	253.5	297.6	284.4	284.4	275.6			14.8
16.4	297.6	286.6	235.9	286.6	264.6	284.4	264.6	245.8	245.8	16.4
19.7	264.6	286.6	205.7	264.6	242.5	253.5	253.5	242.5	227.1	19.7
23.0	242.5	253.5	179.9	253.5	242.5	249.1	231.5	209.4	207.2	23.0
26.2	231.5	231.5	165.8	218.5	220.5	220.5	209.4	199.5	200.4	26.2
29.5	209.4	209.4	150.6	199.7	198.4	199.3	191.1	189.6	188.5	29.5
32.8	176.4	183.0	132.3	185.2	177.0	179.7	175.7	173.1	169.8	32.8
36.1	143.3	154.3	119.1	157.6	153.9	156.5	157.9	151.0	145.3	36.1
39.4	132.3	135.6	110.2	140.0	134.0	138.7	142.4	134.5	129.9	39.4
42.7		117.9	100.3	120.2	111.3	117.7	122.4	117.1	114.4	42.7
45.9		106.9	96.8	106.9	100.3	106.7	112.4	103.6	101.4	45.9
52.5		84.7	81.4	88.2	80.0	84.4	88.2	81.6	79.4	52.5
59.1					65.9	67.9	73.2	66.4	64.2	59.1
65.6					53.4	57.5	61.7	55.6	52.9	65.6
72.2								45.6	43.0	72.2
78.7								40.1	37.9	78.7
85.3								33.1	29.1	85.3
组合 combi nation	000000	001000	000010	000100	110000	011000	001100	111000	210000	组合 combi nation

	98.1 ft	114.5 ft	114.5 ft	114.5 ft	130.9 ft	130.9 ft	130.9 ft	147.3 ft	147.3 ft	
16.4	242.5									16.4
19.7	220.5	205.0	198.4	196.2						19.7
23.0	202.4	200.6	196.2	189.6	172.0	184.1	145.5			23.0
26.2	188.3	194.0	192.9	180.8	160.9	172.0	132.3	117.7	134.5	26.2
29.5	173.5	183.0	180.8	164.2	154.3	160.9	127.9	112.2	130.1	29.5
32.8	156.7	165.3	164.9	155.4	147.0	154.3	114.6	105.8	125.7	32.8
36.1	141.1	152.1	145.5	141.1	132.3	141.1	106.5	99.0	121.3	36.1
39.4	130.1	134.9	134.5	133.8	124.1	134.5	102.5	96.6	116.8	39.4
42.7	112.2	123.5	116.8	121.3	112.4	119.1	92.6	90.4	106.9	42.7
45.9	102.5	109.6	103.6	113.5	104.9	110.2	89.7	89.1	101.4	45.9
52.5	81.4	87.1	81.6	92.4	82.9	89.9	81.8	82.7	86.0	52.5
59.1	66.1	68.6	68.3	75.0	68.6	73.6	78.5	73.6	71.4	59.1
65.6	55.1	56.0	53.6	63.1	56.0	60.8	63.9	61.7	59.5	65.6
72.2	46.3	48.1	44.1	55.1	46.1	52.9	55.1	53.6	49.6	72.2
78.7	41.7	41.9	35.5	47.0	39.7	44.1	47.6	46.3	40.6	78.7
85.3	35.3	35.5	31.1	39.7	35.3	38.1	40.8	39.7	36.2	85.3
91.9		30.0	26.5	36.8	28.7	33.1	37.3	35.3	30.4	91.9
98.4		26.5	22.9	30.9	25.4	28.7	32.4	30.9	26.5	98.4
105.0		22.0	18.7	26.5	21.2	23.1	28.2	26.5	23.8	105.0
111.5					17.6	22.0	24.7	24.7	21.2	111.5
118.1					16.5	17.6	21.4	21.4	17.6	118.1
124.7								18.5	15.4	124.7
131.2								17.6	13.2	131.2
组合 combi nation	021000	111100	211000	011110	211100	111110	011111	111111	211110	组合 combi nation

起重性能表
Lifting capacities

T 147.3~262.5ft



     										
	147.3 ft	163.7 ft	163.7 ft	163.7 ft	180.1 ft	180.1 ft	180.1 ft	196.2 ft	196.2 ft	
26.2	125.7									26.2
29.5	121.3	116.8	114.6	105.8						29.5
32.8	116.8	114.6	112.4	105.8						32.8
36.1	112.4	112.4	110.2	102.1	92.6	83.8	68.3			36.1
39.4	108.0	105.8	108.0	98.3	92.6	83.8	63.9	67.2	63.9	39.4
42.7	104.7	97.0	101.4	93.3	88.2	81.6	63.9	67.2	63.9	42.7
45.9	99.2	96.1	99.2	88.2	86.0	79.4	61.7	67.2	63.9	45.9
52.5	82.9	88.4	85.3	77.2	76.1	70.5	57.3	65.5	61.7	52.5
59.1	68.8	74.1	70.5	66.1	68.3	63.9	55.1	57.3	57.3	59.1
65.6	57.3	63.5	58.4	62.8	58.4	57.3	50.9	57.3	51.1	65.6
72.2	46.3	52.9	49.6	52.7	50.7	47.0	46.3	52.9	46.7	72.2
78.7	40.3	44.1	41.9	46.3	44.1	41.9	44.5	45.4	41.9	78.7
85.3	33.5	38.6	35.9	39.7	37.5	36.6	38.1	39.7	39.9	85.3
91.9	28.7	33.3	30.9	35.3	32.6	32.0	34.6	35.1	34.2	91.9
98.4	24.3	28.7	26.5	30.9	28.7	26.9	30.9	30.4	29.3	98.4
105.0	22.0	26.5	24.3	27.6	26.5	24.3	27.6	24.3	25.1	105.0
111.5	19.8	24.3	22.0	24.7	24.3	22.0	25.4	23.1	22.0	111.5
118.1	16.5	21.6	19.0	22.0	21.2	19.4	22.0	21.6	20.7	118.1
124.7	13.2	17.6	16.1	19.8	18.3	16.8	20.3	18.7	17.9	124.7
131.2	11.0	15.4	13.4	17.6	15.9	14.1	17.9	16.1	15.2	131.2
137.8		13.2	11.2	15.4	13.4	11.9	15.7	13.9	13.0	137.8
144.4		11.0	9.0	13.2	11.5	9.9	13.4	11.9	11.0	144.4
150.9		8.8	7.3	11.2	9.7	7.9	11.7	9.9	9.0	150.9
157.5					7.9	6.2	9.9	8.4	7.5	157.5
164.0								6.8	6.0	164.0
170.6								5.3	4.4	170.6
组合 combi nation	221100	211111	221110	121111	221111	222110	122111	222111	222210	组合 combi nation

 196.2 ft 212.6 ft 212.6 ft 212.6 ft 229.0 ft 229.0 ft 245.4 ft 262.5 ft 										
39.4	62.0									39.4
42.7	59.5									42.7
45.9	58.2	53.4	46.5	41.9						45.9
52.5	52.9	53.4	44.3	39.7	39.9	37.0				52.5
59.1	47.4	50.5	43.0	37.5	39.9	34.6	30.9	24.7		59.1
65.6	44.5	46.3	40.8	35.3	37.9	32.8	30.9	24.7		65.6
72.2	39.9	44.1	37.5	33.1	36.6	31.1	30.2	24.7		72.2
78.7	37.7	42.1	35.3	30.9	34.4	29.8	28.9	24.3		78.7
85.3	35.5	40.3	33.1	28.7	33.1	27.8	28.0	22.5		85.3
91.9	33.3	37.0	30.9	26.5	32.0	26.5	26.2	22.0		91.9
98.4	29.8	33.1	29.1	24.3	30.0	24.3	24.3	21.8		98.4
105.0	27.3	28.7	28.4	22.0	27.8	22.3	23.4	20.5		105.0
111.5	24.3	24.3	24.5	21.4	25.6	20.9	22.3	19.8		111.5
118.1	24.0	22.5	23.8	20.1	23.1	19.8	20.9	18.5		118.1
124.7	21.2	19.6	21.8	19.4	20.7	19.6	19.4	17.6		124.7
131.2	18.7	17.0	19.8	17.6	18.3	18.7	18.1	15.9		131.2
137.8	16.3	14.8	17.6	17.4	15.9	17.6	17.6	14.6		137.8
144.4	14.3	12.8	15.4	16.3	13.9	16.5	15.4	13.4		144.4
150.9	12.3	11.0	13.7	15.4	12.1	15.4	13.4	12.3		150.9
157.5	10.8	9.3	11.9	13.9	10.4	13.2	11.7	11.5		157.5
164.0	9.3	7.7	10.4	12.3	8.8	11.7	10.1	10.1		164.0
170.6	7.7	6.6	8.8	11.0	7.3	11.0	8.8	8.8		170.6
177.2		4.9	7.5	9.7	6.6	8.8	7.3	7.5		177.2
183.7		4.4	6.6	8.8	4.9	7.7	6.6	6.6		183.7
190.3					4.4	6.6	5.1	5.1		190.3
196.9						5.5	4.4	4.4		196.9
203.4								4.4		203.4
组合 combi nation	122211	222211	122221	112222	222221	122222	222222	333333		组合 combi nation

起重性能表

Lifting capacities



T 49.2~147.3ft

     										
	49.2 ft	65.6 ft	65.6 ft	65.6 ft	82.0 ft	82.0 ft	82.0 ft	98.1 ft	98.1 ft	
9.8	286.6									9.8
11.5	275.6	286.6	253.5	275.6						11.5
13.1	275.6	275.6	242.5	264.6						13.1
14.8	264.6	264.6	231.5	253.5	253.5	242.5	253.5			14.8
16.4	264.6	253.5	220.5	242.5	242.5	231.5	242.5	231.5	231.5	16.4
19.7	246.9	231.5	198.4	220.5	220.5	220.5	220.5	220.5	198.4	19.7
23.0	220.5	198.4	176.4	198.4	187.8	198.0	198.4	200.6	198.4	23.0
26.2	176.4	176.4	154.8	177.3	166.9	174.4	176.6	167.3	164.5	26.2
29.5	137.6	137.6	141.8	141.8	134.5	140.2	143.3	136.5	133.8	29.5
32.8	115.5	115.5	111.3	118.4	110.9	115.7	121.3	113.3	108.7	32.8
36.1	91.3	91.3	89.1	92.6	89.9	92.2	93.9	91.3	89.1	36.1
39.4	80.0	80.0	83.3	83.8	78.9	83.3	85.1	78.9	76.7	39.4
42.7		66.8	70.1	70.5	65.7	67.9	69.4	63.5	61.3	42.7
45.9		57.3	61.7	63.9	56.9	61.3	65.0	59.1	54.9	45.9
52.5		46.1	47.6	48.3	43.9	45.9	49.6	46.1	41.9	52.5
59.1		35.3	36.4	36.8	32.6	36.6	38.1	34.6	30.6	59.1
65.6					26.0	28.0	31.5	28.2	24.3	65.6
72.2					21.4	23.1	26.7	21.4	19.6	72.2
78.7								17.9	13.9	78.7
85.3								13.2	11.5	85.3
组合 combi nation	000000	001000	000010	000100	110000	011000	001100	111000	210000	组合 combi nation

          										
	98.1 ft	114.5 ft	114.5 ft	114.5 ft	130.9 ft	130.9 ft	130.9 ft	147.3 ft	147.3 ft	
16.4	209.4									16.4
19.7	198.4	198.4	187.4	176.4						19.7
23.0	192.5	187.4	174.2	165.3	167.6	184.1	138.9			23.0
26.2	173.3	172.8	169.3	161.6	158.7	172.0	125.7	117.7	134.5	26.2
29.5	138.0	142.0	136.2	145.7	139.3	144.4	119.1	111.3	130.1	29.5
32.8	114.6	116.2	110.9	117.7	114.0	119.5	108.0	105.8	114.9	32.8
36.1	92.6	90.4	89.3	93.5	92.6	94.8	97.0	92.6	90.4	36.1
39.4	80.2	81.8	79.1	87.3	81.8	86.2	90.4	88.0	84.9	39.4
42.7	64.8	66.4	65.3	69.7	68.6	71.4	74.5	74.3	70.5	42.7
45.9	60.4	62.0	59.3	63.9	59.7	64.8	70.1	67.7	62.6	45.9
52.5	47.2	48.7	43.9	51.6	46.5	50.7	54.5	52.9	49.4	52.5
59.1	35.9	37.3	34.8	41.9	37.5	42.5	45.2	42.8	40.1	59.1
65.6	28.7	30.9	26.2	35.3	28.7	33.5	36.4	36.2	31.5	65.6
72.2	24.7	23.8	21.6	28.7	24.0	26.7	30.9	29.3	26.7	72.2
78.7	19.2	20.5	18.3	25.4	18.5	20.9	25.8	23.6	21.2	78.7
85.3	14.6	18.1	13.7	20.7	16.1	18.5	21.2	21.2	18.7	85.3
91.9		14.1	9.7	16.8	12.1	16.8	19.4	17.6	14.8	91.9
98.4		11.0	6.6	13.4	8.8	13.4	15.9	16.1	11.5	98.4
105.0		7.9	4.4	10.4	6.0	10.6	13.2	13.2	8.8	105.0
111.5					4.4	7.9	11.0	11.0	6.0	111.5
118.1						5.7	8.8	8.8	4.4	118.1
124.7								6.6		124.7
131.2								4.6		131.2
组合 combi nation	021000	111100	211000	011110	211100	111110	011111	111111	211110	组合 combi nation

起重性能表
Lifting capacities





T 147.3~262.5ft

    											
	147.3 ft	163.7 ft	163.7 ft	163.7 ft	180.1 ft	180.1 ft	180.1 ft	196.2 ft	196.2 ft		
26.2	125.7									26.2	
29.5	121.3	110.2	108.0	99.2						29.5	
32.8	114.0	108.0	105.8	99.2						32.8	
36.1	88.2	94.4	92.2	89.9	77.2	79.4	63.9			36.1	
39.4	81.8	87.7	84.4	89.3	77.2	79.4	59.5	59.5	56.2	39.4	
42.7	68.3	74.3	72.1	75.0	68.3	69.7	55.1	59.5	56.2	42.7	
45.9	59.7	65.5	62.4	67.0	64.8	65.3	52.9	56.2	52.9	45.9	
52.5	46.5	49.8	47.0	51.4	51.6	49.8	52.9	50.7	48.7	52.5	
59.1	37.5	40.6	37.7	42.1	40.1	38.4	42.3	42.8	41.9	59.1	
65.6	28.9	31.7	28.9	33.3	33.5	31.7	35.3	34.0	33.1	65.6	
72.2	21.8	27.1	24.3	28.4	26.7	24.9	28.9	27.1	26.9	72.2	
78.7	18.5	21.4	18.7	22.9	23.1	21.4	25.4	23.6	22.7	78.7	
85.3	16.1	19.0	16.3	20.5	20.7	19.0	21.2	19.0	18.1	85.3	
91.9	12.1	17.2	14.6	18.7	16.8	15.4	19.0	17.2	16.3	91.9	
98.4	8.8	13.9	11.2	15.2	13.4	11.7	15.7	13.9	13.2	98.4	
105.0	6.0	11.0	8.4	12.3	10.6	8.8	12.6	11.0	10.1	105.0	
111.5	4.4	8.6	5.7	9.9	8.2	6.6	10.1	8.8	7.5	111.5	
118.1		6.4	4.4	7.7	6.0	4.4	7.9	6.6	6.6	118.1	
124.7		4.4		5.7	4.4		6.0	4.4	4.4	124.7	
131.2				4.4			4.4			131.2	
组合 combi nation	221100	211111	221110	121111	221111	222110	122111	222111	222210	组合 combi nation	

									
	196.2 ft	212.6 ft	212.6 ft	212.6 ft	229.0 ft	229.0 ft	245.4 ft	262.5 ft	
39.4	55.1								39.4
42.7	52.9								42.7
45.9	50.7	44.1	44.1	39.7					45.9
52.5	48.5	44.1	39.9	35.3	33.3	37.0			52.5
59.1	45.2	41.4	37.7	32.8	33.3	34.8	30.9	22.0	59.1
65.6	36.6	34.8	36.4	30.4	31.3	33.7	30.9	22.0	65.6
72.2	29.5	28.0	30.9	28.4	31.3	32.2	28.7	22.0	72.2
78.7	24.3	24.5	25.1	26.2	26.5	30.6	27.1	21.6	78.7
85.3	19.2	19.8	22.7	24.7	22.3	26.2	24.7	19.8	85.3
91.9	17.6	18.1	18.7	20.7	19.8	22.0	20.7	19.4	91.9
98.4	16.3	15.4	17.6	19.8	15.9	19.0	17.6	17.6	98.4
105.0	13.4	12.1	14.6	16.8	13.2	15.9	14.3	14.6	105.0
111.5	11.0	9.5	12.1	14.1	11.0	13.4	11.9	11.9	111.5
118.1	8.8	7.3	10.1	11.9	8.8	11.2	9.9	9.7	118.1
124.7	6.8	5.3	8.2	9.9	6.6	9.3	7.9	7.7	124.7
131.2	5.1	4.4	6.6	8.2	4.6	7.5	6.6	6.6	131.2
137.8	4.4		4.9	6.6	4.4	6.6	4.4	4.4	137.8
144.4			4.4	5.1		4.4	4.4	4.4	144.4
150.9				4.4		4.4			150.9
组合 combi nation	122211	222211	122221	112222	222221	122222	222222	333333	组合 combi nation

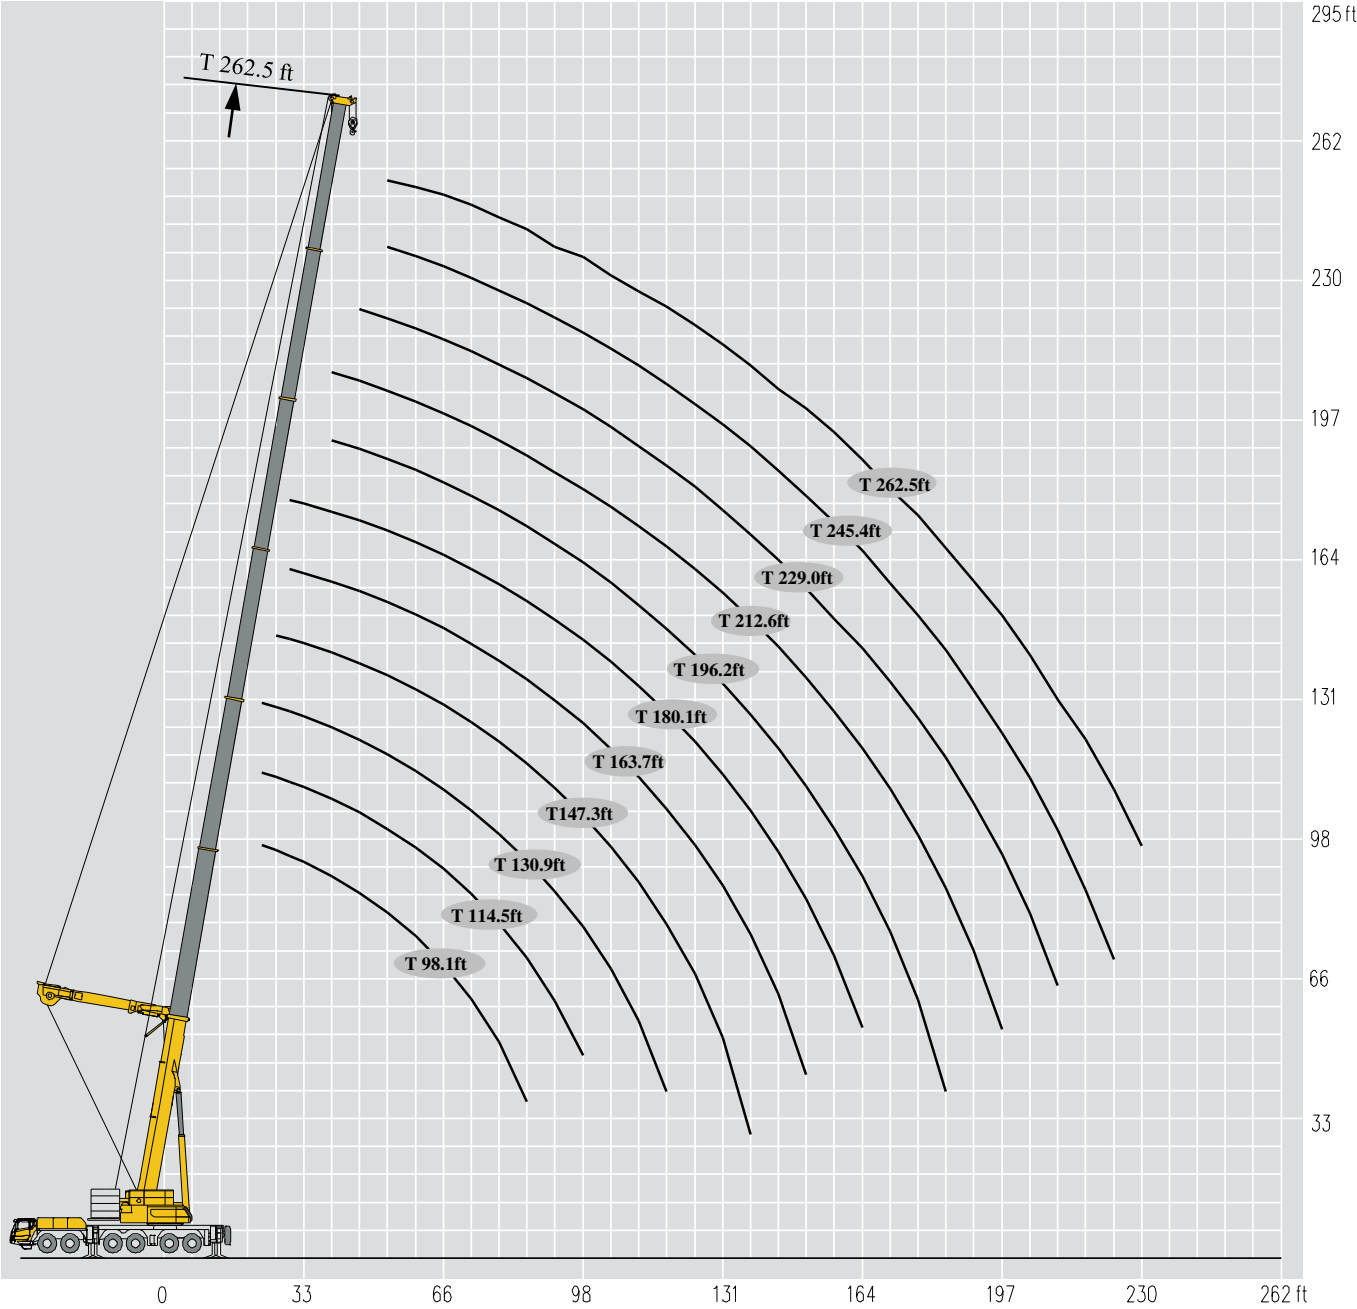
起重性能表
Lifting capacities

T 49.2~196.2ft

	 49.2-196.2ft	 29.3ft × 18.4ft	 360°	 0 lb							
	49.2 ft	65.6 ft	65.6 ft	65.6 ft	82.0 ft	82.0 ft	82.0 ft	98.1 ft	98.1 ft		
9.8	253.5									9.8	
11.5	231.5	220.5	209.4	216.1						11.5	
13.1	209.4	209.4	198.4	203.9						13.1	
14.8	168.7	169.8	179.5	174.2	140.0	149.0	156.7			14.8	
16.4	125.0	125.7	134.3	131.4	110.7	118.2	124.8	94.6	87.1	16.4	
19.7	73.9	78.3	83.8	81.4	71.4	77.8	83.1	74.5	68.3	19.7	
23.0	50.3	52.2	57.1	54.9	46.1	51.8	56.7	48.9	43.4	23.0	
26.2	35.3	37.0	41.7	39.7	31.5	36.6	41.2	32.0	26.7	26.2	
29.5	25.8	25.4	29.8	27.8	20.1	24.9	29.1	24.7	19.8	29.5	
32.8	19.6	19.0	23.1	21.4	16.1	18.7	22.7	18.5	13.9	32.8	
36.1	13.2	13.2	17.6	15.4	10.8	13.2	17.6	11.9	8.8	36.1	
39.4	8.2	9.7	13.7	11.9	4.9	9.5	13.2	7.3		39.4	
42.7			9.3	7.7			8.8			42.7	
45.9			6.2	4.6			5.7			45.9	
组合 combi nation	000000	001000	000010	000100	110000	011000	001100	111000	210000	组合 combi nation	



										
	98.1 ft	114.5 ft	114.5 ft	114.5 ft	130.9 ft	130.9 ft	130.9 ft	147.3 ft	147.3 ft	
16.4	96.8									16.4
19.7	76.5	78.7	71.4	86.4						19.7
23.0	50.7	52.7	46.3	59.5	47.6	54.2	61.3			23.0
26.2	33.5	37.5	31.5	43.9	32.6	38.8	45.2	42.3	35.9	26.2
29.5	26.2	25.6	20.1	31.7	23.1	29.1	35.1	32.4	26.5	29.5
32.8	19.8	19.4	13.9	25.1	17.0	22.5	28.4	25.8	20.1	32.8
36.1	12.6	13.2	8.8	19.8	11.0	17.6	22.0	19.8	15.2	36.1
39.4	8.6	10.1	5.1	15.7	7.9	13.2	18.7	16.1	10.8	39.4
42.7		5.7		10.8		8.8	14.3	11.0	6.6	42.7
45.9				7.9		5.7	11.0	8.6	4.4	45.9
52.5							5.5	4.4		52.5
组合 combi nation	021000	111100	211000	011110	211100	111110	011111	111111	211110	组合 combi nation

											
	147.3 ft	163.7 ft	163.7 ft	163.7 ft	180.1 ft	180.1 ft	180.1 ft	196.2 ft	196.2 ft	196.2 ft	
26.2	32.6										26.2
29.5	23.1	31.7	28.2	33.7							29.5
32.8	17.0	23.1	19.8	24.9							32.8
36.1	12.1	17.6	15.0	18.3	15.4	13.2	17.6				36.1
39.4	7.9	13.7	10.6	15.2	13.2	11.2	15.7	13.7	12.6	16.5	39.4
42.7	4.4	8.8	6.6	10.8	8.8	6.6	10.1	8.8	7.7	11.7	42.7
45.9		6.2	4.4	7.7	5.7	4.4	7.9	6.2	5.1	9.0	45.9
52.5										4.4	52.5
组合 combi nation	221100	211111	221110	121111	221111	222110	122111	222111	222210	122211	组合 combi nation



起重性能表
Lifting capacities



T 98.1~262.5ft

																
	98.1 ft	98.1 ft	98.1 ft	114.5 ft	114.5 ft	114.5 ft	130.9 ft	130.9 ft	130.9 ft	147.3 ft	147.3 ft	147.3 ft	163.7 ft	163.7 ft		
23.0	231.5	220.5	227.1	167.1	205.0	204.6	184.1	176.4	174.2							23.0
26.2	218.3	207.2	216.1	160.9	194.2	192.9	169.8	176.4	167.6	132.3	154.3	162.0				26.2
29.5	207.0	183.0	205.0	154.3	187.4	187.6	165.3	165.3	163.1	121.3	149.9	162.0	129.6	124.1		29.5
32.8	187.4	176.4	185.2	149.9	180.3	181.9	165.3	154.3	153.4	110.2	145.5	159.8	124.6	119.3		32.8
39.4	164.2	155.2	158.7	149.9	163.1	165.3	151.2	142.2	149.5	105.8	137.8	149.7	119.7	116.4		39.4
45.9	146.6	134.5	133.4	147.7	139.3	141.5	141.1	137.1	140.2	101.4	131.4	138.0	114.2	111.1		45.9
52.5	121.3	110.2	112.7	130.1	116.8	120.2	127.9	115.3	123.5	97.0	119.7	122.4	108.5	106.3		52.5
59.1	105.8	92.6	92.8	112.4	99.6	102.5	110.5	101.4	108.0	92.6	101.2	106.9	102.5	99.6		59.1
65.6	92.6	79.8	84.2	99.2	86.6	88.4	96.6	88.4	91.9	88.2	87.3	93.7	96.1	92.6		65.6
72.2	79.4	63.7	67.9	85.8	71.2	75.8	86.4	73.6	79.8	86.0	75.8	79.4	84.7	79.8		72.2
78.7	68.3	53.4	56.7	77.2	60.4	62.0	76.3	62.2	67.9	77.4	67.9	72.8	74.7	68.8		78.7
85.3	57.3	42.8	46.3	67.2	49.6	56.0	67.9	53.4	58.2	68.3	55.3	58.4	67.5	58.6		85.3
91.9				58.9	40.1	46.3	59.7	44.8	49.6	59.7	49.2	51.1	60.0	50.0		91.9
98.4				51.8	34.6	37.9	52.7	40.8	44.3	56.2	43.2	47.2	54.2	47.4		98.4
105.0							46.5	34.4	39.2	49.8	36.8	39.9	44.1	41.0		105.0
111.5							41.0	29.5	33.5	44.5	31.7	34.0	40.3	35.7		111.5
118.1							36.4	24.3	29.8	40.1	27.1	28.7	35.5	31.3		118.1
124.7										35.7	23.1	24.9	31.3	26.7		124.7
131.2										32.0	19.8	22.5	27.6	22.9		131.2
137.8										25.4	15.9	17.6	24.3	19.4		137.8
144.4													22.0	16.3		144.4
150.9													17.9	13.4		150.9
组合 combi nation	000210	210000	111000	000022	211000	111100	002210	211100	111110	000222	211110	111111	022210	221110	组合 combi nation	

	163.7 ft	180.1 ft	180.1 ft	180.1 ft	196.2 ft	196.2 ft	196.2 ft	212.6 ft	212.6 ft	229.0 ft	229.0 ft	245.4 ft	262.5 ft	
29.5	132.3													29.5
32.8	128.5	91.5	110.2	117.9										32.8
39.4	123.0	88.2	106.9	110.2	84.9	90.4	94.8	67.2	78.9					39.4
45.9	117.7	84.9	102.3	105.8	83.8	89.5	94.8	65.0	76.7	55.6	66.1			45.9
52.5	110.2	81.6	95.9	100.3	82.7	87.3	92.2	62.8	74.5	53.4	63.9	56.2	47.8	52.5
59.1	103.4	78.3	90.4	95.9	81.6	83.8	86.2	60.6	72.3	51.1	61.7	56.2	46.3	59.1
65.6	93.7	75.0	85.3	89.7	80.5	78.3	81.8	58.6	69.9	48.9	59.5	55.1	43.2	65.6
72.2	81.6	73.9	78.5	81.6	79.4	76.3	78.5	56.4	67.7	47.2	57.5	54.0	42.1	72.2
78.7	73.9	73.9	69.4	72.3	78.3	70.5	71.0	54.2	65.3	45.0	55.3	52.9	40.8	78.7
85.3	62.2	64.6	60.4	62.8	69.0	62.4	64.6	52.2	62.8	43.9	53.1	51.8	39.5	85.3
91.9	55.3	59.3	51.8	53.6	62.6	53.8	56.7	50.0	56.4	43.0	50.3	50.7	38.1	91.9
98.4	48.7	54.0	46.3	47.0	55.3	48.5	49.8	47.6	51.8	41.7	47.8	49.6	37.0	98.4
105.0	43.2	48.3	40.6	40.8	51.1	41.9	43.4	46.1	45.2	40.1	44.8	46.3	35.7	105.0
111.5	37.9	45.0	35.5	36.4	45.6	37.3	39.0	43.0	39.7	38.8	41.9	42.3	34.4	111.5
118.1	33.5	41.0	31.3	33.3	41.0	32.0	33.3	39.7	35.7	37.7	37.5	38.6	33.1	118.1
124.7	29.5	36.6	26.9	29.8	36.6	29.1	30.9	35.7	31.7	35.3	34.2	35.7	31.7	124.7
131.2	26.2	33.5	23.4	26.2	32.8	25.9	27.1	32.0	27.1	32.2	30.6	31.3	30.6	131.2
137.8	22.7	30.2	21.2	22.5	29.5	23.0	24.3	28.4	24.5	29.8	27.1	28.7	29.5	137.8
144.4	19.8	27.3	18.1	20.3	26.5	19.4	21.2	25.8	22.5	26.5	23.8	25.4	26.5	144.4
150.9	17.0	24.7	15.4	17.6	24.3	16.1	18.3	23.8	19.8	24.0	21.2	22.9	23.4	150.9
157.5		22.3	12.8	15.0	22.0	14.1	15.9	20.5	17.6	21.6	19.0	21.4	21.2	157.5
164.0		19.4	10.4	12.1	20.3	12.1	13.9	18.3	15.4	19.6	17.0	19.0	19.4	164.0
170.6					18.1	9.7	11.2	17.2	13.2	17.6	15.0	17.9	17.6	170.6
177.2					16.8	8.8	9.9	15.7	11.7	15.9	13.0	16.5	15.9	177.2
183.7					15.4	6.6	8.6	13.9	9.5	13.9	11.2	15.2	15.0	183.7
190.3								12.8	7.9	12.1	9.5	13.7	13.9	190.3
196.9								11.0	6.6	10.8	8.2	11.9	12.6	196.9
203.4										9.3	6.8	10.6	11.2	203.4
210.0										7.7	5.3	9.3	9.9	210.0
216.5												7.1	8.6	216.5
223.1												5.7	7.3	223.1
229.7													6.2	229.7
组合 combi nation	211111	002222	222110	221111	012222	222210	222111	112222	222211	122222	222221	222222	333333	组合 combi nation

起重性能表
Lifting capacities

T 98.1~262.5ft

																
	98.1 ft	98.1 ft	98.1 ft	114.5 ft	114.5 ft	114.5 ft	130.9 ft	130.9 ft	130.9 ft	147.3 ft	147.3 ft	147.3 ft	163.7 ft	163.7 ft		
23.0	231.5	220.5	227.1	167.1	205.0	202.7	184.1	176.4	174.2							23.0
26.2	211.6	202.8	207.2	151.7	182.1	179.6	164.2	169.5	162.9	132.3	154.3	162.0				26.2
29.5	192.8	166.5	185.7	140.0	169.4	169.0	157.6	147.5	155.4	119.1	146.6	160.3	127.9	122.4		29.5
32.8	165.3	155.9	162.7	132.7	156.9	160.1	149.7	137.3	146.8	106.3	137.1	149.0	117.7	114.0		32.8
39.4	143.9	138.1	139.6	129.9	139.0	141.4	141.1	126.8	138.5	96.3	124.1	132.7	108.2	104.3		39.4
45.9	119.8	110.0	111.6	122.8	112.2	115.5	123.2	113.1	117.7	90.4	115.5	124.1	101.9	98.8		45.9
52.5	95.0	80.2	84.7	99.9	85.6	91.3	101.7	87.5	95.5	86.4	92.8	97.2	93.0	91.7		52.5
59.1	75.4	60.8	63.0	85.5	67.1	72.2	82.4	71.4	77.9	82.5	73.8	82.4	79.4	74.3		59.1
65.6	60.2	47.6	51.1	70.9	54.3	57.2	67.3	57.3	63.5	73.2	60.6	64.9	67.1	63.7		65.6
72.2	48.1	35.7	40.2	59.1	42.6	47.1	54.9	45.8	51.3	63.3	48.9	53.2	56.4	51.5		72.2
78.7	38.1	27.1	31.3	48.8	34.2	36.9	45.5	37.1	42.4	51.8	42.2	46.9	48.6	43.1		78.7
85.3	31.1	20.2	23.1	42.4	26.2	31.7	38.7	30.3	35.0	45.5	33.1	36.6	40.2	35.4		85.3
91.9				34.9	19.4	24.6	32.1	23.9	28.5	39.0	28.1	31.0	34.8	29.0		91.9
98.4				29.3	14.8	18.5	27.0	20.2	24.2	35.8	22.3	27.6	29.8	26.2		98.4
105.0							22.4	15.5	19.8	31.0	18.7	22.4	25.2	20.9		105.0
111.5							18.9	11.2	15.7	26.9	15.0	19.6	20.9	16.3		111.5
118.1							16.3	7.7	12.6	23.1	11.6	16.1	17.9	13.4		118.1
124.7										20.1	8.2	13.2	14.1	10.4		124.7
131.2										17.2	5.7	9.9	11.9	7.3		131.2
137.8										14.3			9.8	5.1		137.8
144.4													6.6			144.4
150.9													4.9			150.9
组合 combi nation	000210	210000	111000	000022	211000	111100	002210	211100	111110	000222	211110	111111	022210	221110	组合 combi nation	

	163.7 ft	180.1 ft	180.1 ft	180.1 ft	196.2 ft	196.2 ft	196.2 ft	212.6 ft	212.6 ft	229.0 ft	229.0 ft	245.4 ft	262.5 ft	
29.5	130.1													29.5
32.8	120.6	91.5	109.1	116.8										32.8
39.4	110.0	88.2	97.9	101.4	84.9	87.1	93.7	67.2	77.1					39.4
45.9	104.9	82.5	90.6	93.5	83.8	79.4	88.8	65.0	72.1	55.6	66.1			45.9
52.5	92.2	74.3	85.1	88.8	79.4	77.2	78.3	62.8	67.5	53.4	62.8	56.2	47.8	52.5
59.1	76.2	69.9	71.7	73.9	75.8	72.3	74.1	58.4	61.7	51.1	54.0	56.2	46.3	59.1
65.6	66.8	64.2	58.8	63.5	69.2	59.5	61.7	55.1	53.4	46.7	49.4	55.1	43.2	65.6
72.2	55.8	56.2	51.9	54.3	58.4	51.6	53.3	48.5	46.3	44.1	45.2	50.1	42.1	72.2
78.7	46.3	48.9	44.5	46.3	53.3	45.5	46.1	45.2	42.8	37.5	40.1	46.3	40.8	78.7
85.3	38.7	43.3	36.8	39.3	45.6	38.8	40.8	41.4	40.3	35.3	36.8	40.3	38.6	85.3
91.9	33.1	39.1	30.7	32.4	41.3	32.6	34.7	35.3	33.5	33.1	31.9	34.5	34.8	91.9
98.4	28.0	34.9	26.3	27.4	35.5	28.4	29.5	30.9	29.3	30.9	29.6	31.3	31.5	98.4
105.0	23.1	30.5	21.9	23.8	32.0	23.5	24.7	28.8	26.0	28.4	26.8	28.5	26.7	105.0
111.5	19.6	26.8	18.1	19.6	28.1	19.9	21.3	26.1	22.3	24.7	24.0	25.3	23.1	111.5
118.1	16.3	22.0	14.3	16.1	24.6	16.2	17.2	23.5	19.2	21.8	20.7	21.8	21.2	118.1
124.7	13.2	21.4	11.7	13.4	21.4	13.4	15.0	20.7	15.7	20.2	18.1	20.0	18.0	124.7
131.2	9.9	18.9	9.1	11.0	18.6	11.3	12.1	17.9	13.1	17.8	15.4	16.8	16.7	131.2
137.8	7.7	16.0	6.6	8.6	16.1	8.8	9.5	15.1	10.8	15.8	13.1	14.7	15.0	137.8
144.4	5.3	14.0	4.4	6.2	13.9	6.6	7.3	13.1	9.0	13.4	10.6	12.1	13.0	144.4
150.9		12.1		4.4	12.2	4.4	5.3	11.2	7.1	11.5	8.8	10.5	11.0	150.9
157.5		9.7			9.9			9.3	5.1	9.5	7.1	8.8	9.4	157.5
164.0		8.4			9.0			7.7		7.9	5.3	7.1	7.7	164.0
170.6					7.3			6.4		6.6		5.5	6.0	170.6
177.2					6.3			5.1		5.1			5.1	177.2
组合 combi nation	211111	002222	222110	221111	012222	222210	222111	112222	222211	122222	222221	222222	333333	组合 combi nation

起重性能表

Lifting capacities

T 98.1~262.5ft





										
	98.1 ft	98.1 ft	98.1 ft	114.5 ft	114.5 ft	114.5 ft	130.9 ft	130.9 ft	130.9 ft	
23.0	194.0	166.0	173.1	145.5	180.6	176.2	165.3	150.6	163.1	23.0
26.2	140.2	117.9	124.8	131.2	121.3	124.8	143.3	133.2	138.5	26.2
29.5	105.6	78.0	84.4	111.3	91.7	94.8	101.6	92.6	95.9	29.5
32.8	56.0	59.5	66.6	87.3	65.3	69.7	81.6	67.2	71.9	32.8
39.4	50.3	35.7	39.5	54.5	41.7	43.0	50.7	39.7	46.7	39.4
45.9	33.1	18.1	22.0	39.7	23.1	24.7	36.4	27.8	33.1	45.9
52.5	21.6	6.6	12.1	29.8	12.8	18.3	26.5	17.6	22.0	52.5
59.1	13.2			19.6		7.7	18.1	8.6	13.2	59.1
65.6				14.3			11.0		6.6	65.6
72.2				8.6						72.2
组合 combination	000210	210000	111000	000022	211000	111100	002210	211100	111110	组合 combination

	147.3 ft	147.3 ft	147.3 ft	163.7 ft	163.7 ft	163.7 ft	180.1 ft	180.1 ft	180.1 ft	
26.2	116.6	139.6	143.3							26.2
29.5	102.1	98.3	99.2	107.4	101.9	110.2				29.5
32.8	88.6	72.8	75.6	86.0	72.8	76.3	77.4	74.5	76.9	32.8
39.4	52.9	44.1	48.3	48.9	45.0	46.5	68.1	47.0	49.2	39.4
45.9	40.8	29.1	31.7	33.1	30.9	32.0	39.9	35.3	36.4	45.9
52.5	31.3	19.8	24.3	25.9	22.0	23.8	31.5	23.1	24.3	52.5
59.1	23.1	13.2	18.1	19.8	14.8	17.6	24.9	16.3	18.5	59.1
65.6	19.0	6.6	11.9	12.8	6.6	10.4	19.8	8.8	11.0	65.6
72.2	13.2			6.6			15.4			72.2
78.7	7.1						9.9			78.7
85.3							6.6			85.3
组合 combination	000222	211110	111111	022210	221110	211111	002222	222110	221111	组合 combination

	196.2 ft	196.2 ft	196.2 ft	212.6 ft	212.6 ft	229.0 ft	229.0 ft	245.4 ft	262.5 ft	
39.4	57.3	49.6	51.8	59.5	52.9					39.4
45.9	42.1	35.3	36.4	43.0	37.5	39.7	36.8			45.9
52.5	30.9	24.3	25.1	33.1	27.6	30.9	27.6	32.0	30.9	52.5
59.1	24.3	18.7	19.6	23.6	19.8	23.4	22.0	22.5	22.7	59.1
65.6	19.8	11.2	12.3	19.8	14.3	19.4	15.9	18.1	17.6	65.6
72.2	15.4	5.7	6.6	13.7	8.4	13.2	9.9	12.1	11.5	72.2
78.7	11.0			9.3				7.7	7.9	78.7
85.3	6.6			5.5						85.3
组合 combination	012222	222210	222111	112222	222211	122222	222221	222222	333333	组合 combination

起重性能表
Lifting capacities



T 98.1~262.5ft

															
	98.1 ft	98.1 ft	98.1 ft	114.5 ft	114.5 ft	114.5 ft	130.9 ft	130.9 ft	130.9 ft	147.3 ft	147.3 ft	147.3 ft	163.7 ft	163.7 ft	
23.0	231.5	220.5	227.1	167.1	205.0	204.6									23.0
26.2	218.3	207.2	209.4	160.9	194.2	192.9	165.3	167.6	163.1						26.2
29.5	205.0	183.0	187.4	154.3	187.4	187.6	160.9	160.9	158.7	119.1	143.3	154.3			29.5
32.8	185.0	169.1	173.9	143.5	176.8	177.7	154.3	148.8	144.6	108.0	132.3	152.1	121.3	116.8	32.8
39.4	144.6	129.9	134.3	136.7	130.5	135.6	142.4	133.4	136.7	101.4	121.3	132.3	116.8	112.4	39.4
45.9	111.1	96.8	101.0	119.7	101.9	106.7	114.0	104.3	109.3	93.3	104.3	105.8	110.2	108.0	45.9
52.5	88.2	74.3	78.5	96.6	79.1	84.0	88.8	79.4	84.4	92.2	79.4	84.4	96.3	91.3	52.5
59.1	71.9	58.2	62.2	78.0	60.8	65.5	72.5	63.3	68.1	77.8	65.3	70.3	77.8	73.0	59.1
65.6	57.5	44.1	48.1	63.7	46.7	51.4	58.2	49.2	54.0	65.7	53.4	58.2	63.7	58.9	65.6
72.2	48.3	35.1	39.0	52.2	35.7	40.1	49.2	40.1	45.0	56.7	44.3	49.2	52.2	47.6	72.2
78.7	39.0	25.8	29.8	45.2	28.7	33.1	39.9	31.1	35.7	47.4	35.3	39.9	43.2	38.4	78.7
85.3	33.1	20.1	24.0	39.7	23.4	27.8	34.4	25.8	30.4	41.9	30.0	34.6	37.7	33.1	85.3
91.9				35.3	19.0	23.4	30.2	21.6	26.2	35.3	23.6	28.2	31.3	26.7	91.9
98.4				29.5	15.4	19.8	26.9	18.3	22.7	29.8	18.1	22.7	25.8	21.4	98.4
105.0				24.5	11.0	13.2	22.0	13.4	18.1	27.3	15.4	20.1	23.4	18.7	105.0
111.5							20.1	11.5	15.9	25.1	13.4	18.1	21.4	16.8	111.5
118.1							16.1	7.5	12.1	21.6	11.0	14.3	17.9	13.2	118.1
124.7										18.1	8.8	13.2	14.6	9.9	124.7
131.2										15.4	6.6	10.1	11.5	7.1	131.2
137.8										13.2	4.4		11.0	6.6	137.8
144.4													8.6	4.4	144.4
150.9													6.4		150.9
组合 combi nation	000210	210000	111000	000022	211000	111100	002210	211100	111110	000222	211110	111111	022210	221110	组合 combi nation

	163.7 ft	180.1 ft	180.1 ft	180.1 ft	196.2 ft	196.2 ft	196.2 ft	212.6 ft	212.6 ft	229.0 ft	229.0 ft	245.4 ft	262.5 ft	
32.8	125.7	89.3	108.0	110.2										32.8
39.4	119.1	86.0	104.7	102.5	82.7	88.2	97.0	63.9	75.0					39.4
45.9	112.4	80.5	97.9	101.4	81.6	87.3	92.6	61.7	72.8	53.4	63.9			45.9
52.5	94.4	77.2	89.3	92.6	80.5	85.1	89.5	59.5	70.5	51.1	61.7	52.9	44.1	52.5
59.1	75.8	74.7	70.1	71.9	78.9	70.1	71.2	57.3	68.3	48.9	59.5	52.9	42.5	59.1
65.6	61.7	67.0	56.0	57.8	69.0	60.2	61.3	55.1	66.1	46.7	57.3	51.8	39.7	65.6
72.2	50.5	57.8	47.0	48.7	57.8	48.9	49.8	52.9	56.0	44.5	55.3	50.7	38.6	72.2
78.7	41.2	48.5	37.9	39.7	50.7	42.1	43.0	51.8	46.7	42.8	48.5	48.5	37.5	78.7
85.3	35.9	43.0	32.6	34.2	43.0	34.4	35.5	44.1	39.2	41.7	41.0	44.1	36.2	85.3
91.9	29.5	36.6	26.2	27.8	38.8	30.4	31.3	37.7	32.8	39.0	32.4	38.6	34.0	91.9
98.4	24.0	33.3	22.9	24.7	33.3	24.9	25.8	32.2	27.3	34.4	29.1	33.3	31.7	98.4
105.0	21.6	28.7	18.3	19.8	30.9	22.3	23.4	29.8	24.9	29.5	26.7	30.6	29.1	105.0
111.5	19.6	26.7	16.3	18.1	26.7	18.3	19.2	25.6	20.7	27.6	22.5	26.5	27.1	111.5
118.1	15.9	22.9	12.6	14.3	25.1	16.8	17.9	22.0	19.4	24.0	21.2	22.9	23.6	118.1
124.7	12.6	21.8	11.0	13.2	21.8	13.7	14.6	20.9	16.5	20.7	20.1	21.8	20.3	124.7
131.2	9.7	19.0	11.0	12.6	19.8	12.3	13.2	18.1	13.2	20.1	17.2	19.0	19.6	131.2
137.8	9.3	17.6	8.4	9.9	18.5	10.4	11.2	16.5	12.8	17.4	14.6	16.5	17.0	137.8
144.4	6.8	16.1	6.0	7.7	16.3	7.9	8.8	14.3	10.6	15.2	12.3	14.1	14.8	144.4
150.9	4.6	13.9	4.4	5.5	14.1	6.0	6.8	12.1	8.4	13.0	10.1	11.9	12.6	150.9
157.5		11.7		4.4	12.2	4.4	4.9	9.9	6.4	11.0	8.2	10.1	10.6	157.5
164.0		9.5			10.4			7.7	4.6	9.3	6.4	8.4	8.8	164.0
170.6		7.3			8.6			5.5		7.7	4.9	6.6	7.3	170.6
177.2					7.1			4.4		6.2	4.4	5.1	5.7	177.2
183.7					5.5			4.4		4.6		4.4	4.4	183.7
190.3										4.4				190.3
组合 combi nation	211111	002222	222110	221111	012222	222210	222111	112222	222211	122222	222221	222222	333333	组合 combi nation

起重性能表
Lifting capacities

T 98.1~262.5ft

     																
	98.1 ft	98.1 ft	98.1 ft	114.5 ft	114.5 ft	114.5 ft	130.9 ft	130.9 ft	130.9 ft	147.3 ft	147.3 ft	147.3 ft	163.7 ft	163.7 ft		
23.0	211.6	205.0	209.4	151.7	187.4	187.0									23.0	
26.2	189.6	183.0	185.2	145.5	172.0	175.3	147.7	149.9	143.3						26.2	
29.5	159.6	143.3	148.2	138.9	149.9	152.1	138.9	143.3	133.6	101.4	119.1	130.1			29.5	
32.8	129.9	114.0	118.8	127.9	119.1	121.3	130.1	124.6	129.2	88.2	108.0	115.3	103.6	99.2	32.8	
39.4	93.9	76.7	81.4	101.4	83.8	88.2	101.2	91.3	98.8	83.8	93.7	97.0	97.0	92.4	39.4	
45.9	67.9	53.6	57.8	75.0	57.3	63.5	75.2	65.5	70.5	77.2	67.7	73.0	73.9	68.8	45.9	
52.5	51.8	37.9	42.1	58.2	40.8	45.4	56.9	47.6	52.5	64.6	51.8	56.9	55.8	50.7	52.5	
59.1	38.4	24.7	28.9	46.7	29.8	34.4	45.6	36.6	41.4	53.4	40.8	45.6	44.5	39.5	59.1	
65.6	30.2	16.8	20.7	35.3	19.4	24.0	35.3	26.2	31.1	42.8	30.4	35.3	36.4	31.5	65.6	
72.2	24.0	10.8	14.8	30.2	13.7	18.1	27.1	18.1	22.9	34.6	22.3	27.1	30.2	25.6	72.2	
78.7	19.4	6.2	10.1	25.6	9.0	13.7	22.5	13.7	18.5	30.0	17.9	22.7	23.6	19.0	78.7	
85.3	13.4		4.4	19.8	6.6	9.3	19.2	10.4	15.0	24.3	12.3	17.2	20.3	15.4	85.3	
91.9				16.5		4.9	16.8	7.9	11.0	21.8	9.9	14.6	17.6	13.2	91.9	
98.4				13.2			14.1	4.4	7.7	17.9	6.0	10.6	13.9	9.3	98.4	
105.0				9.9			8.8		4.4	14.3	4.4	7.1	10.4	5.7	105.0	
111.5							4.4			11.2		4.9	7.3		111.5	
118.1										8.4		4.4	4.4		118.1	
124.7										6.0					124.7	
131.2										4.4					131.2	
137.8										4.4					137.8	
组合 combi nation	000210	210000	111000	000022	211000	111100	002210	211100	111110	000222	211110	111111	022210	221110	组合 combi nation	

														
	163.7 ft	180.1 ft	180.1 ft	180.1 ft	196.2 ft	196.2 ft	196.2 ft	212.6 ft	212.6 ft	229.0 ft	229.0 ft	245.4 ft	262.5 ft	
32.8	108.0	73.9	92.6	94.8										32.8
39.4	95.7	70.5	89.3	87.1	69.4	75.0	83.8	52.9	61.7					39.4
45.9	71.9	65.0	72.8	74.5	68.3	74.1	77.2	50.7	59.5	42.3	48.5			45.9
52.5	53.6	60.6	54.5	56.4	65.7	56.7	57.5	48.5	57.3	40.1	46.3	44.1	37.5	52.5
59.1	42.5	52.2	41.2	43.0	52.2	43.2	44.1	46.3	48.1	37.9	44.1	41.9	35.3	59.1
65.6	34.4	44.1	33.1	34.8	43.9	34.4	35.3	42.8	39.9	35.9	39.7	39.2	33.1	65.6
72.2	28.4	35.7	24.9	26.7	35.7	26.9	27.8	36.8	31.7	34.4	33.1	35.3	30.9	72.2
78.7	21.8	33.3	22.7	24.5	31.1	22.5	23.4	30.0	25.1	30.9	29.1	30.9	28.7	78.7
85.3	18.7	27.8	17.2	19.0	27.8	19.2	20.1	26.7	21.8	26.5	23.7	25.4	26.0	85.3
91.9	15.9	23.1	14.8	16.5	23.1	14.6	15.4	22.0	17.0	21.8	19.8	21.6	21.4	91.9
98.4	11.9	19.0	10.8	12.6	19.0	12.8	13.7	20.3	15.2	17.9	17.0	17.6	17.2	98.4
105.0	8.6	15.7	7.5	9.7	15.7	9.5	10.4	16.8	11.9	15.4	13.7	14.3	13.9	105.0
111.5	5.5	13.2	4.4	6.2	13.7	6.4	7.3	13.7	8.8	13.2	10.6	11.7	10.8	111.5
118.1		11.0		4.4	11.0	4.4	4.6	11.0	6.2	11.0	7.9	9.3	8.2	118.1
124.7		8.8			8.8			8.6	4.4	8.8	5.7	6.6	6.0	124.7
131.2		6.6			6.6			6.6		6.6	4.4	5.5	4.4	131.2
137.8		4.4			4.4			4.4		4.4		4.4	4.4	137.8
144.4		4.4			4.4									144.4
组合 combi nation	211111	002222	222110	221111	012222	222210	222111	112222	222211	122222	222221	222222	333333	组合 combi nation

起重性能表
Lifting capacities

T 98.1~212.6ft



98.1-262.5ft

SL

29.3ft×18.4ft

360°

0 lb






	98.1 ft	98.1 ft	98.1 ft	114.5 ft	114.5 ft	114.5 ft	130.9 ft	130.9 ft	
23.0	72.8	61.7	66.1	59.5	66.1	55.1			23.0
26.2	50.7	39.7	44.1	50.7	48.5	44.1	59.5	48.5	26.2
29.5	39.7	24.3	28.7	37.5	30.2	35.9	46.3	35.3	29.5
32.8	28.4	12.6	17.4	30.9	22.0	28.7	35.3	24.3	32.8
39.4	13.2	4.4	7.3	22.0	10.1	13.2	22.0	12.8	39.4
45.9	6.4			13.2		4.4	11.0	4.4	45.9
52.5				8.8			4.4		52.5
59.1				4.4					59.1
组合 combi nation	000210	210000	111000	000022	211000	111100	002210	211100	组合 combi nation

	130.9 ft	147.3 ft	147.3 ft	147.3 ft	163.7 ft	163.7 ft	163.7 ft	180.1 ft	
26.2	52.9								26.2
29.5	39.7	42.5	30.9	39.7					29.5
32.8	30.9	33.1	26.5	30.9	30.9	26.5	28.7	34.8	32.8
39.4	18.1	26.5	15.2	20.5	21.6	16.3	19.4	25.8	39.4
45.9	6.6	17.6	6.4	13.2	12.6	7.3	10.4	20.7	45.9
52.5		13.2		4.4	4.6		4.4	12.6	52.5
59.1		6.6						6.6	59.1
65.6								4.4	65.6
组合 combi nation	111110	000222	211110	111111	022210	221110	211111	002222	组合 combi nation

	180.1 ft	180.1 ft	196.2 ft	196.2 ft	196.2 ft	212.6 ft	212.6 ft	
32.8	28.7	30.9						32.8
39.4	20.3	22.0	27.8	18.1	19.0	26.5	20.7	39.4
45.9	9.0	8.8	20.5	11.2	12.1	17.2	11.7	45.9
52.5	4.4	4.4	14.8	5.5	6.4	11.2	6.0	52.5
59.1			8.6			5.3		59.1
65.6			4.4					65.6
组合 combi nation	222110	221111	012222	222210	222111	112222	222211	组合 combi nation





起重性能表
Lifting capacities

T 212.6~262.5ft

     														
	212.6 ft			229.0ft			245.4ft			262.5ft				
	37.4 ft			37.4 ft			37.4 ft			37.4 ft				
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°		
42.7	30.4												42.7	
45.9	30.0			25.1									45.9	
52.5	30.0			24.7			20.9						52.5	
59.1	29.8	28.4		24.3			20.7			16.1			59.1	
65.6	29.5	27.8	20.9	23.8	23.8		20.3			16.1			65.6	
72.2	29.1	27.1	22.3	23.6	23.6		20.1	19.0		15.9	15.9		72.2	
78.7	28.7	26.5	21.6	23.4	22.9	22.3	19.6	18.5	17.9	15.7	15.7		78.7	
85.3	28.0	25.6	21.2	22.5	22.3	21.6	19.4	18.3	17.4	15.4	15.2	15.0	85.3	
91.9	27.1	24.5	20.7	21.8	21.4	20.9	19.2	17.9	17.0	15.2	15.0	14.8	91.9	
98.4	26.0	23.6	20.3	20.9	20.5	20.5	18.7	17.4	16.8	14.8	14.6	14.1	98.4	
105.0	24.9	22.9	19.8	20.3	19.8	19.6	18.5	17.2	16.5	14.3	14.1	13.9	105.0	
111.5	23.8	22.0	19.2	19.6	19.0	19.0	17.9	16.8	16.3	14.1	13.7	13.9	111.5	
118.1	22.7	21.4	18.5	19.4	18.1	18.1	17.0	16.3	15.2	13.4	13.2	13.2	118.1	
124.7	21.6	20.7	17.6	18.7	17.4	17.4	16.3	15.9	15.0	13.0	13.0	13.2	124.7	
131.2	20.5	20.1	17.4	18.1	16.8	16.5	15.7	15.2	14.6	12.8	12.6	12.1	131.2	
137.8	19.4	19.2	17.2	17.4	16.3	15.9	15.0	14.6	14.1	12.1	12.1	11.7	137.8	
144.4	18.5	18.5	17.0	16.3	15.9	15.2	14.3	14.1	13.4	11.9	11.5	11.2	144.4	
150.9	17.6	17.6	17.0	15.7	15.4	15.2	13.7	13.2	13.0	11.2	11.0	10.8	150.9	
157.5	17.2	16.8	16.5	15.0	14.6	15.0	13.2	13.0	12.6	10.8	10.8	10.4	157.5	
164.0	16.8	15.9	15.9	14.6	14.1	14.3	12.6	12.3	12.1	10.6	10.1	10.1	164.0	
170.6	16.3	14.8	15.0	13.9	13.4	13.9	11.9	11.9	11.7	9.9	9.9	9.7	170.6	
177.2	15.7	14.8	14.8	13.2	13.0	13.2	11.7	11.2	11.2	9.5	9.5	9.3	177.2	
183.7	14.6	14.3	14.3	12.6	12.3	12.8	10.8	10.8	10.8	9.3	8.8	8.8	183.7	
190.3	13.7	13.9	13.9	11.5	11.9	12.3	10.1	10.4	10.4	8.6	8.2	8.4	190.3	
196.9	12.3	12.8	13.9	10.8	11.0	11.9	9.9	9.7	10.1	7.9	7.9	7.9	196.9	
203.4	11.0	11.7		9.9	10.1	12.3	9.0	9.3	9.5	7.9	7.7	7.9	203.4	
210.0	9.9	10.6		9.5	9.5	11.5	8.6	8.8	8.8	7.3	7.3	7.9	210.0	
216.5	9.0	9.3		8.8	9.0	10.6	8.2	8.4	10.1	6.6	6.6	7.5	216.5	
223.1	8.6	8.6		8.2	8.4		7.7	7.9	8.8	6.2	6.2	7.1	223.1	
229.7	7.3	8.2		7.3	7.7		7.1	7.5		5.7	5.7	6.0	229.7	
236.2	6.0			7.1	7.1		6.2	6.8		5.3	5.3	5.5	236.2	
242.8	5.1			6.6	6.8		5.7	6.0		4.9	5.1		242.8	
249.3				4.2			5.3	4.9		4.4	4.6		249.3	
255.9				3.5			4.2	4.4		3.7	4.2		255.9	
262.5				3.3			3.5			3.5	3.5		262.5	
269.0							2.9			3.1	3.3		269.0	
275.6							2.4			2.6	2.9		275.6	
组合 combin ation	222211			222221			222222			333333			组合 combin ation	





起重性能表
Lifting capacities

T 212.6~262.5ft

     													
	212.6 ft			229.0ft			245.4ft			262.5ft			
	63.6 ft			63.6 ft			63.6 ft			63.6 ft			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	
45.9	17.0												45.9
52.5	17.0			15.0									52.5
59.1	17.2			15.0			12.8						59.1
65.6	17.2			15.0			13.0			10.4			65.6
72.2	16.8	14.1		15.2			13.0			10.4			72.2
78.7	16.3	13.7		15.0	13.2		13.2			10.4			78.7
85.3	15.7	13.4	11.7	14.6	12.8		13.0	12.1		10.4			85.3
91.9	15.2	13.2	11.7	14.1	12.3	11.0	12.8	11.9		10.4	10.4		91.9
98.4	14.8	12.8	11.5	13.7	12.1	11.0	12.6	11.5		10.4	10.1		98.4
105.0	14.1	12.6	11.2	13.4	11.9	10.8	12.1	11.2	10.4	10.1	10.1	9.5	105.0
111.5	13.9	12.3	11.2	13.2	11.7	10.8	11.9	11.0	10.1	10.1	9.9	9.5	111.5
118.1	13.7	12.1	11.0	12.8	11.5	10.6	11.7	10.6	10.1	9.9	9.7	9.3	118.1
124.7	13.4	11.9	11.0	12.3	11.5	10.6	11.5	10.6	10.1	9.9	9.5	9.0	124.7
131.2	13.2	11.7	10.8	12.1	11.2	10.6	11.2	10.4	9.9	9.7	9.5	8.8	131.2
137.8	12.8	11.7	10.8	11.9	11.0	10.6	11.0	10.1	9.7	9.3	9.0	8.6	137.8
144.4	12.6	11.5	10.8	11.7	11.0	10.4	10.8	9.7	9.5	9.3	9.0	8.4	144.4
150.9	12.3	11.2	10.6	11.7	10.8	10.4	10.6	9.7	9.3	9.0	8.8	8.2	150.9
157.5	12.1	11.2	10.6	11.5	10.6	10.4	10.4	9.5	9.0	8.8	8.8	8.2	157.5
164.0	11.9	11.0	10.6	11.0	10.6	10.4	10.1	9.3	8.8	8.6	8.6	8.2	164.0
170.6	11.7	11.0	10.6	10.8	10.4	10.4	9.9	9.3	8.6	8.6	8.6	8.2	170.6
177.2	11.5	10.8	10.6	10.4	10.1	10.1	9.7	9.0	8.4	8.4	8.4	8.2	177.2
183.7	11.2	10.8	10.6	9.9	9.9	9.9	9.5	8.8	8.2	8.2	8.4	8.4	183.7
190.3	10.8	10.6	10.6	9.7	9.5	9.7	9.3	8.6	8.2	7.7	8.2	8.4	190.3
196.9	10.6	10.6	10.6	9.3	9.3	9.5	9.0	8.6	8.2	7.3	7.7	8.4	196.9
203.4	10.1	10.4	10.6	9.3	8.8	9.0	8.6	8.4	8.2	6.6	7.3	8.2	203.4
210.0	9.5	9.7	10.1	9.0	8.6	8.8	8.2	8.2	8.4	6.2	6.8	7.9	210.0
216.5	9.0	9.3		8.6	8.4	8.4	7.5	7.5	8.2	5.7	6.2	7.3	216.5
223.1	8.6	8.8		7.9	8.2	8.2	7.1	7.3	7.7	5.5	5.7	6.6	223.1
229.7	8.4	8.2		7.3	7.7		6.6	6.8	7.5	5.1	5.3	6.4	229.7
236.2	7.5	8.2		6.8	7.1		6.2	6.4	7.1	4.6	5.1	6.0	236.2
242.8	6.6	7.3		6.4	6.8		6.0	6.2		4.4	4.9	5.5	242.8
249.3	6.4	6.4		6.0	6.2		5.5	6.0		4.0	4.4	5.1	249.3
255.9	5.5	6.2		5.5	5.7		4.9	5.5		3.5	4.2		255.9
262.5	4.2			5.3	5.3		4.4	4.9		3.3	3.5		262.5
269.0	3.5			4.9	5.1		4.0	4.2		2.9	3.3		269.0
275.6				3.3			3.7	4.0			2.9		275.6
282.2				2.6			3.3	3.5					282.2
288.7							2.6						288.7
组合 combin ation	222211			222221			222222			333333			组合 combin ation


起重性能表
Lifting capacities

T 212.6~262.5ft

 														
	212.6 ft			229.0ft			245.4ft			262.5ft				
	76.8 ft			76.8ft			76.8 ft			76.8 ft				
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°		
52.5	13.2												52.5	
59.1	13.2			12.8			11.0						59.1	
65.6	13.0			12.8			11.0			8.2			65.6	
72.2	12.8			12.8			11.2			8.4			72.2	
78.7	12.6			12.3			11.0			8.4			78.7	
85.3	12.3	11.0		12.1			10.8			8.4			85.3	
91.9	11.9	10.6		11.9	10.4		10.6			8.2			91.9	
98.4	11.7	10.4		11.5	10.1		10.4	9.5		7.9			98.4	
105.0	11.7	10.1	7.7	11.2	9.7		10.1	9.3		7.9	7.5		105.0	
111.5	11.5	9.7	7.5	11.0	9.5	7.3	9.9	9.0		7.7	7.3		111.5	
118.1	11.2	9.5	7.3	10.6	9.3	7.3	9.7	8.8	7.3	7.7	7.1		118.1	
124.7	10.8	9.3	7.3	10.4	9.0	7.3	9.5	8.6	7.1	7.5	7.1	6.6	124.7	
131.2	10.4	9.0	7.1	10.1	8.8	7.1	9.3	8.4	7.1	7.5	6.8	6.6	131.2	
137.8	10.1	8.8	6.8	9.7	8.6	7.1	9.0	8.2	6.8	7.3	6.8	6.4	137.8	
144.4	9.7	8.6	6.8	9.5	8.4	6.8	9.0	8.2	6.8	7.1	6.8	6.4	144.4	
150.9	9.5	8.4	6.8	9.3	8.2	6.8	8.8	7.9	6.8	7.1	6.8	6.4	150.9	
157.5	9.3	8.2	6.6	9.0	7.9	6.6	8.6	7.7	6.8	6.8	6.8	6.4	157.5	
164.0	9.0	7.9	6.6	8.8	7.7	6.6	8.4	7.5	6.6	6.8	6.6	6.0	164.0	
170.6	8.6	7.7	6.6	8.6	7.7	6.6	8.2	7.5	6.6	6.6	6.2	6.0	170.6	
177.2	8.4	7.5	6.4	8.4	7.5	6.4	7.9	7.3	6.6	6.6	6.2	5.7	177.2	
183.7	8.2	7.3	6.4	8.2	7.3	6.4	7.9	7.3	6.6	6.4	6.0	5.7	183.7	
190.3	7.9	7.3	6.4	7.9	7.3	6.4	7.7	7.1	6.6	6.4	6.0	5.7	190.3	
196.9	7.7	7.1	6.4	7.7	7.1	6.4	7.5	7.1	6.6	6.2	5.7	5.7	196.9	
203.4	7.5	7.1	6.4	7.5	7.1	6.4	7.5	6.8	6.6	6.0	5.7	5.7	203.4	
210.0	7.3	6.8	6.4	7.5	6.8	6.4	7.3	6.8	6.6	5.5	5.7	5.7	210.0	
216.5	7.3	6.8	6.4	7.3	6.8	6.4	7.1	6.6	6.6	5.1	5.5	5.7	216.5	
223.1	7.1	6.6	6.4	7.1	6.6	6.4	6.6	6.6	6.6	4.6	5.1	5.5	223.1	
229.7	6.8	6.6		6.8	6.6	6.4	6.2	6.4	6.8	4.4	4.6	5.3	229.7	
236.2	6.6	6.4		6.6	6.6	6.4	5.7	6.0	6.6	4.0	4.4	4.9	236.2	
242.8	6.6	6.4		6.2	6.2		5.3	5.5	6.2	3.7	4.2	4.4	242.8	
249.3	6.2	6.4		5.7	6.0		4.9	5.1	5.7	3.3	3.7	4.2	249.3	
255.9	5.3	6.2		5.3	5.5		4.6	4.9		3.1	3.5	4.0	255.9	
262.5	5.1	5.3		4.9	5.1		4.2	4.6			3.3	3.5	262.5	
269.0	4.6	5.1		4.2	4.6		3.7	4.4					269.0	
275.6	3.7			4.0	4.2		3.3	4.0					275.6	
282.2	2.6			4.0	4.0		3.1	3.3					282.2	
288.7							2.9	2.9					288.7	
295.3								2.6					295.3	
组合 combin ation	222211			222221			222222			333333			组合 combin ation	

起重性能表
Lifting capacities

T 212.6~262.5ft






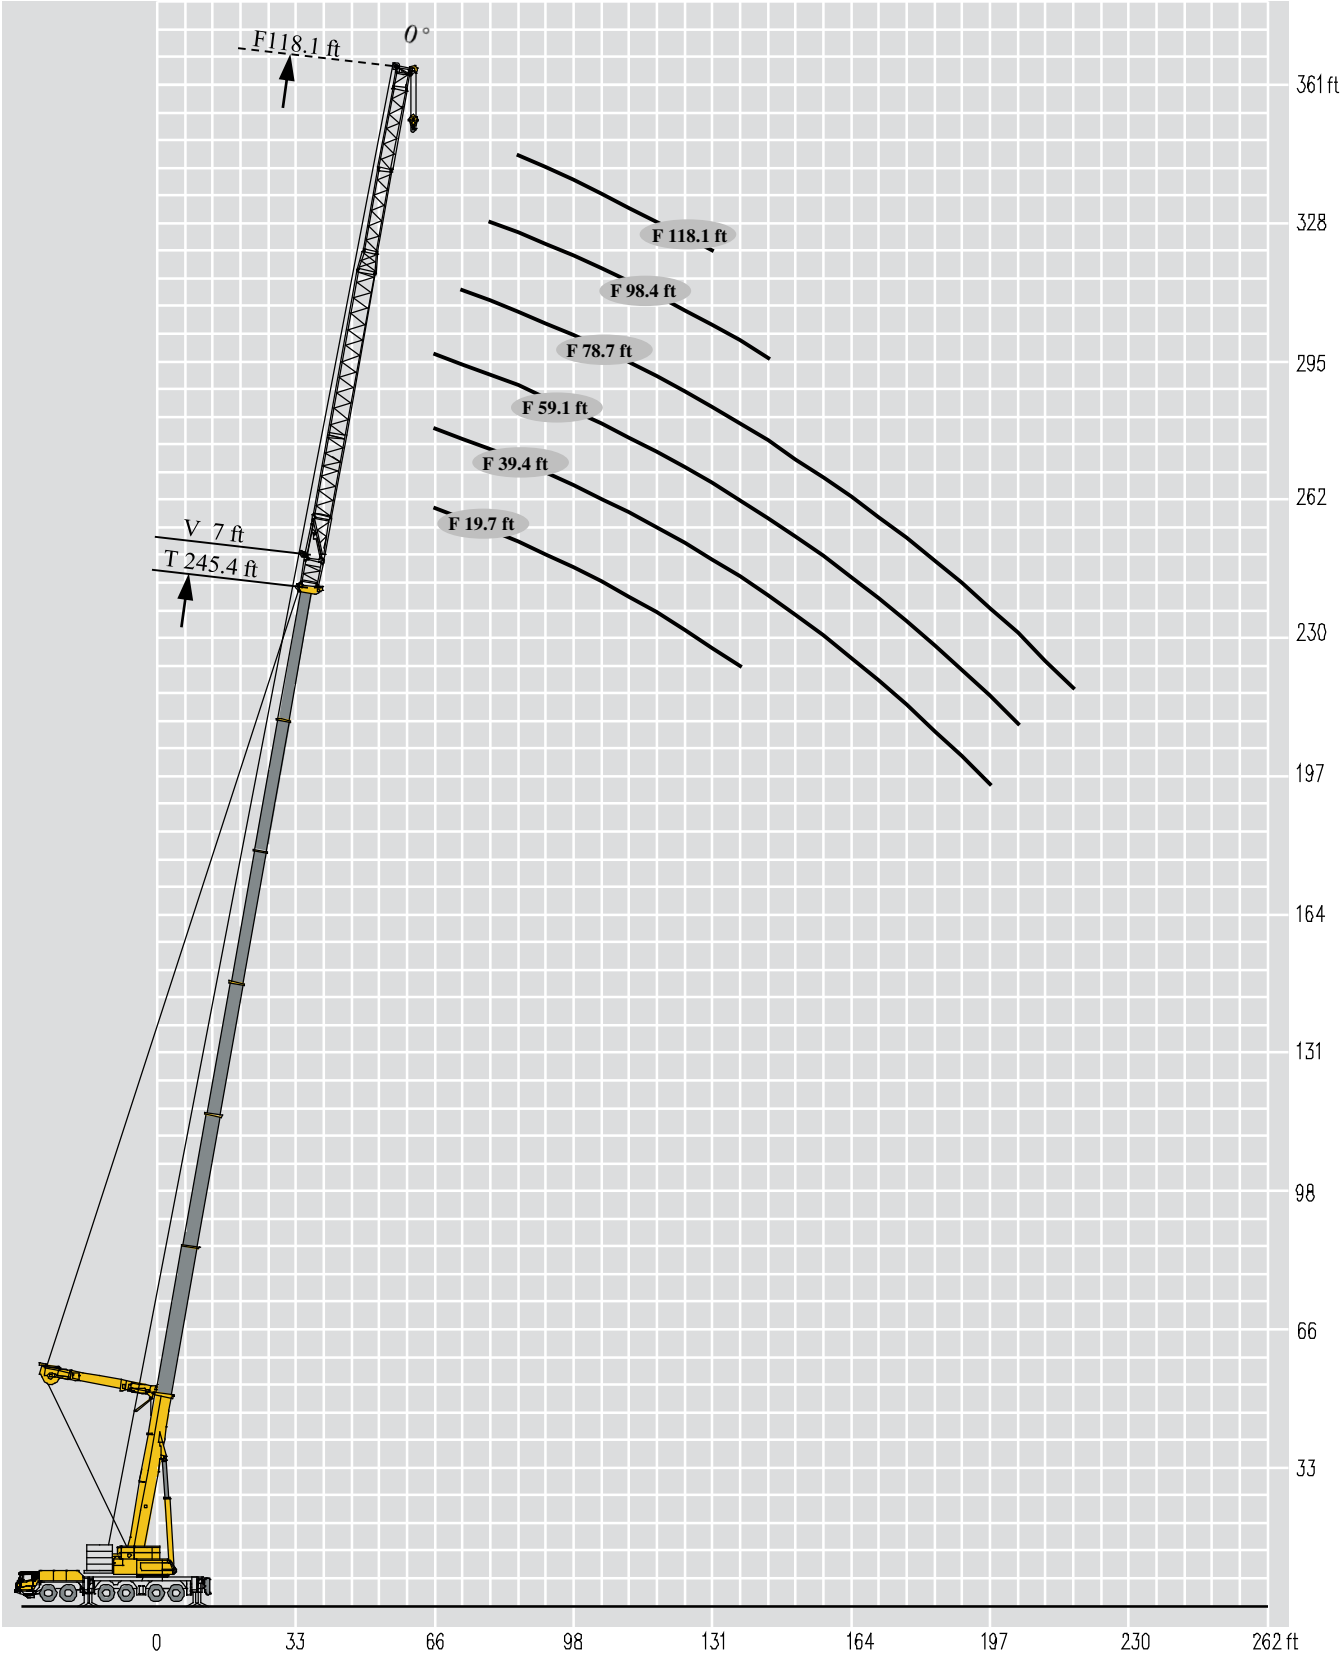
	     												
	212.6 ft			229.0ft			245.4ft			262.5ft			
	89.9 ft			89.9 ft			89.9 ft			89.9 ft			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	
52.5	11.9												52.5
59.1	11.9			10.4									59.1
65.6	12.1			10.6			9.0						65.6
72.2	12.1			10.6			9.3			8.2			72.2
78.7	12.3			10.8			9.3			8.2			78.7
85.3	12.3	9.5		10.8			9.3			8.2			85.3
91.9	12.3	9.3		10.8	8.6		9.3	7.7		8.2			91.9
98.4	12.1	9.0		10.6	8.4		9.0	7.5		7.9			98.4
105.0	11.9	9.0		10.6	8.4		9.0	7.5		7.9	6.8		105.0
111.5	11.7	8.8	7.5	10.4	8.2		8.8	7.5		7.9	6.8		111.5
118.1	11.5	8.8	7.5	10.4	8.2	6.6	8.8	7.5		7.9	6.8		118.1
124.7	11.2	8.6	7.3	10.1	8.2	6.6	8.8	7.3	6.8	7.7	6.8	5.7	124.7
131.2	11.0	8.6	7.1	9.9	8.2	6.6	8.8	7.3	6.6	7.7	6.6	5.7	131.2
137.8	10.8	8.4	7.1	9.9	7.9	6.6	8.6	7.1	6.6	7.5	6.6	5.7	137.8
144.4	10.6	8.2	7.1	9.7	7.9	6.6	8.4	7.1	6.2	7.3	6.6	5.7	144.4
150.9	10.4	8.2	6.8	9.5	7.7	6.6	8.2	7.1	6.2	7.1	6.6	5.7	150.9
157.5	10.1	8.2	6.8	9.3	7.7	6.6	7.9	7.1	6.2	6.8	6.6	5.7	157.5
164.0	9.9	7.9	6.8	8.8	7.7	6.6	7.7	7.1	6.2	6.8	6.6	5.7	164.0
170.6	9.7	7.9	6.8	8.6	7.5	6.6	7.3	6.8	6.2	6.6	6.6	5.7	170.6
177.2	9.5	7.7	6.8	8.2	7.3	6.6	7.1	6.8	6.2	6.4	6.4	5.7	177.2
183.7	9.3	7.7	6.8	7.9	7.3	6.6	6.8	6.8	6.2	6.2	6.2	5.7	183.7
190.3	9.0	7.7	6.8	7.5	7.3	6.6	6.6	6.4	6.2	6.0	6.2	5.7	190.3
196.9	8.6	7.5	6.8	7.3	7.1	6.6	6.4	6.2	6.2	5.5	5.7	5.7	196.9
203.4	8.2	7.5	6.8	6.8	6.8	6.6	6.4	6.0	6.2	5.3	5.5	5.7	203.4
210.0	7.9	7.5	6.8	6.6	6.4	6.6	6.4	5.7	6.2	4.9	5.3	5.7	210.0
216.5	7.5	7.3	6.8	6.6	6.2	6.6	6.0	5.5	5.7	4.6	4.9	5.5	216.5
223.1	7.1	7.3	6.8	6.4	6.2	6.4	6.0	5.5	5.7	4.4	4.6	5.3	223.1
229.7	6.8	7.1	6.8	6.4	6.2		5.5	5.5	5.7	4.4	4.6	5.1	229.7
236.2	6.4	6.6		6.2	5.7		5.3	5.5	5.5	4.0	4.6	4.9	236.2
242.8	6.2	6.2		6.0	5.7		5.1	5.1	5.5		4.0	4.6	242.8
249.3	5.7	6.2		5.5	5.7		4.9	5.1	5.3		3.7		249.3
255.9	5.5	5.7		4.9	5.5		4.6	4.9	5.1				255.9
262.5	5.3	5.5		4.4	5.3		4.4	4.6					262.5
269.0	4.9	5.1		4.2	4.4		4.0	4.4					269.0
275.6	4.4	4.9		4.0	4.2		3.3	4.2					275.6
282.2	3.3			4.0	4.0		2.6						282.2
288.7				3.5	4.0		2.2						288.7
295.3													295.3
组合 combin ation	222211			222221			222222			333333			组合 combin ation

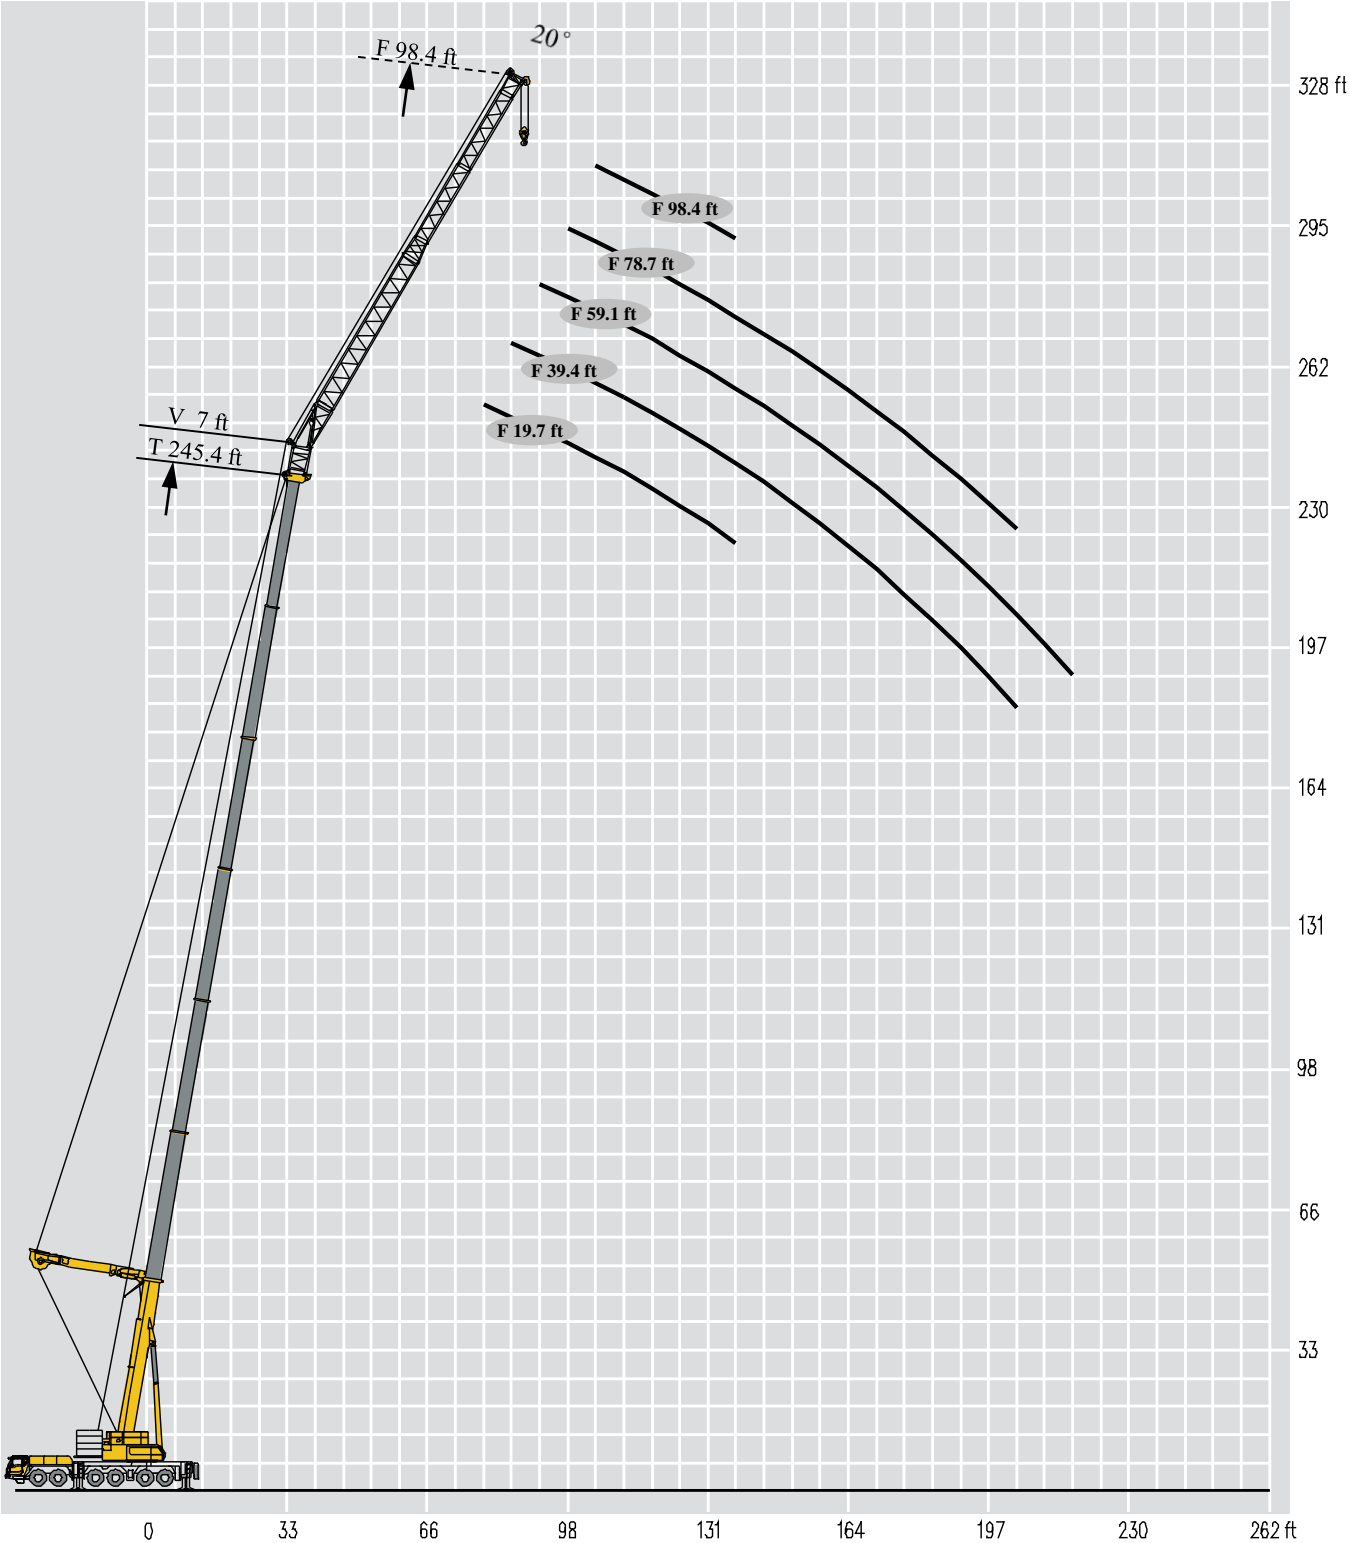
起重性能表
Lifting capacities

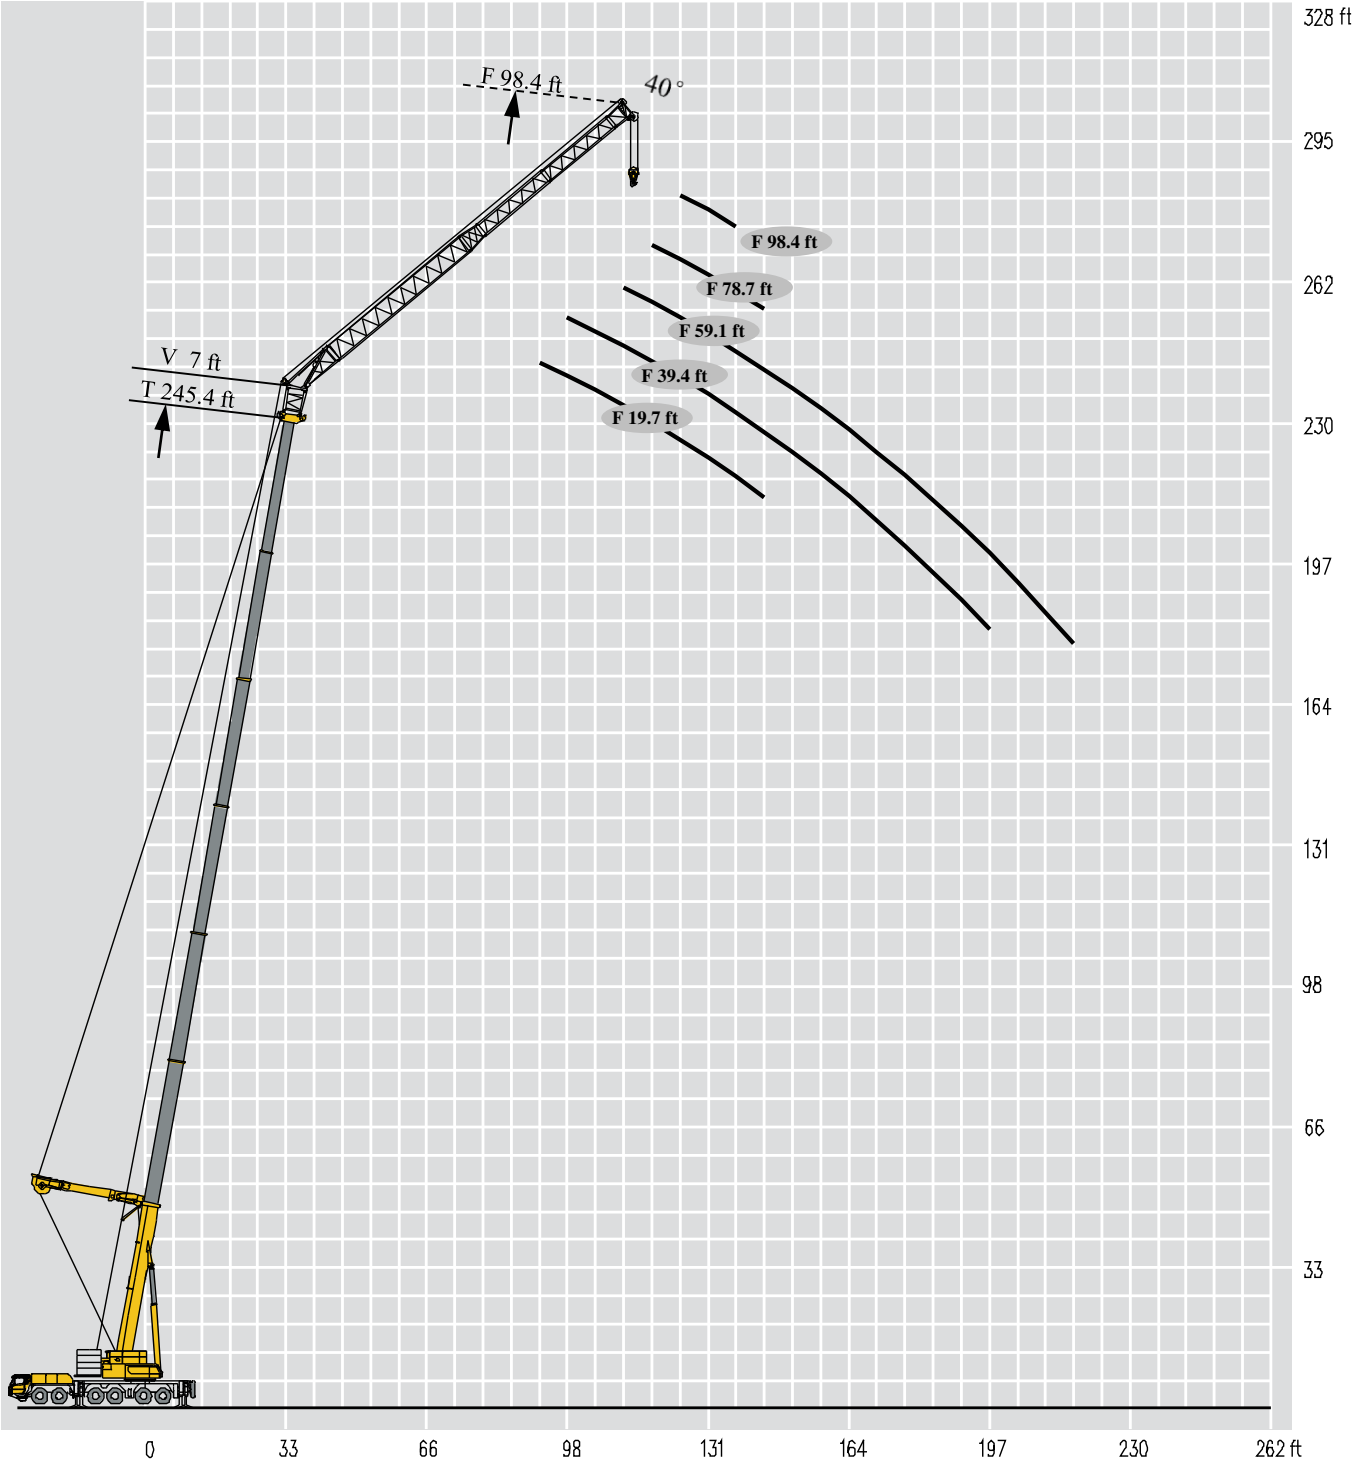
T 212.6~262.5ft

 212.6-262.5ft 116.1ft 29.3ft×28ft 360° 220461 lb														
	212.6 ft			229.0ft			245.4ft			262.5ft				
	116.1ft			116.1ft			116.1ft			116.1ft				
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°		
59.1	9.5												59.1	
65.6	9.3			7.9			6.6						65.6	
72.2	9.0			7.9			6.6			5.7			72.2	
78.7	8.8			7.7			6.6			5.7			78.7	
85.3	8.8			7.7			6.4			5.5			85.3	
91.9	8.6			7.5			6.4			5.5			91.9	
98.4	8.6	7.9		7.5			6.4			5.5			98.4	
105.0	8.4	7.9		7.3	7.1		6.2			5.5			105.0	
111.5	8.2	7.9		7.3	7.1		6.2	6.0		5.3			111.5	
118.1	8.2	7.7		7.3	7.1		6.2	6.0		5.3	5.3		118.1	
124.7	7.9	7.7	6.6	7.1	6.8		6.0	6.0		5.3	5.3		124.7	
131.2	7.9	7.7	6.6	7.1	6.8	6.2	6.0	6.0		5.3	5.3		131.2	
137.8	7.7	7.5	6.6	6.8	6.8	6.2	6.0	6.0		5.3	5.3		137.8	
144.4	7.5	7.5	6.6	6.8	6.6	6.2	5.7	5.7	5.3	5.1	5.3		144.4	
150.9	7.5	7.3	6.6	6.6	6.6	6.2	5.7	5.7	5.3	5.1	5.1		150.9	
157.5	7.3	7.3	6.6	6.6	6.6	6.0	5.7	5.7	5.3	5.1	5.1		157.5	
164.0	7.3	7.1	6.6	6.4	6.4	6.0	5.7	5.7	5.3	5.1	5.1		164.0	
170.6	7.1	7.1	6.6	6.4	6.4	6.0	5.5	5.7	5.3	5.1	5.1		170.6	
177.2	6.8	7.1	6.4	6.4	6.4	6.0	5.5	5.5	5.3	5.1	5.1		177.2	
183.7	6.8	6.8	6.4	6.2	6.4	6.0	5.5	5.5	5.3	4.9	5.1		183.7	
190.3	6.6	6.8	6.4	6.2	6.2	6.0	5.3	5.5	5.3	4.6	4.9		190.3	
196.9	6.6	6.6	6.2	6.0	6.2	6.0	5.1	5.3	5.3	4.6	4.6		196.9	
203.4	6.4	6.6	6.2	5.7	5.7	5.7	4.9	4.9	5.3	4.4	4.6		203.4	
210.0	6.4	6.4	6.2	5.5	5.5	5.7	4.6	4.9	5.3	4.2	4.2		210.0	
216.5	6.2	6.4	6.2	5.1	5.3	5.5	4.4	4.4	4.9		4.0		216.5	
223.1	6.0	6.0	6.0	5.1	4.9	5.3	4.2	4.2	4.9				223.1	
229.7	5.7	6.0	6.0	5.5	4.9	5.3	4.0	4.2	4.4				229.7	
236.2	5.5	5.5	5.7	5.3	4.6	5.1	4.0	4.0	4.4				236.2	
242.8	5.1	5.1	5.5	4.6	4.2	4.9		3.5	4.2				242.8	
249.3	4.6	5.1	5.3	4.4	4.0	4.4		3.3	4.0				249.3	
255.9	4.4	5.1		4.0	3.7	4.2			3.5				255.9	
262.5	4.0	5.1		3.5	3.5	4.0			3.3				262.5	
269.0	3.7	4.6			3.5				3.3				269.0	
275.6	3.5	4.2			3.3								275.6	
282.2	3.5	3.7											282.2	
288.7	3.5	3.5											288.7	
295.3		3.5											295.3	
组合 combin ation	222211			222221			222222			333333			组合 combin ation	

     														
	212.6 ft			229.0ft			245.4ft			262.5ft				
	129.3ft			129.3ft			129.3ft			129.3ft				
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°		
72.2	7.7												72.2	
78.7	7.7			6.6			5.5						78.7	
85.3	7.5			6.6			5.5			4.6			85.3	
91.9	7.3			6.4			5.3			4.6			91.9	
98.4	7.3			6.4			5.3			4.6			98.4	
105.0	7.1			6.2			5.3			4.6			105.0	
111.5	7.1	6.4		6.2			5.1			4.4			111.5	
118.1	6.8	6.4		6.0	6.0		5.1			4.4			118.1	
124.7	6.8	6.4		6.0	5.7		5.1	4.9		4.4			124.7	
131.2	6.6	6.2		6.0	5.7		5.1	4.9		4.4	4.2		131.2	
137.8	6.6	6.2	5.1	5.7	5.7		4.9	4.9		4.4	4.2		137.8	
144.4	6.4	6.2	5.1	5.7	5.5		4.9	4.9		4.2	4.2		144.4	
150.9	6.2	6.2	5.1	5.7	5.5	4.6	4.9	4.9		4.2	4.2		150.9	
157.5	6.2	6.0	5.1	5.5	5.5	4.6	4.9	4.6		4.2	4.2		157.5	
164.0	6.2	6.0	5.1	5.5	5.5	4.6	4.6	4.6	4.2	4.2	4.2		164.0	
170.6	6.0	6.0	5.1	5.5	5.3	4.6	4.6	4.6	4.2	4.2	4.2		170.6	
177.2	5.7	6.0	5.1	5.3	5.3	4.6	4.6	4.6	4.2	4.0	4.2		177.2	
183.7	5.7	5.7	5.1	5.3	5.3	4.9	4.6	4.6	4.2	4.0	4.2		183.7	
190.3	5.7	5.7	5.1	5.3	5.3	4.9	4.4	4.6	4.2	4.0	4.2		190.3	
196.9	5.5	5.5	5.1	5.1	5.1	4.9	4.4	4.6	4.2	4.0	4.2		196.9	
203.4	5.5	5.5	5.1	5.1	5.1	4.9	4.4	4.6	4.2		4.0		203.4	
210.0	5.3	5.3	5.1	5.1	5.1	4.9	4.2	4.4	4.2		3.7		210.0	
216.5	5.3	5.3	5.1	4.9	4.9	4.6	4.0	4.0	4.2		3.7		216.5	
223.1	5.1	5.3	5.1	4.4	4.6	4.6	3.7	4.0	4.2				223.1	
229.7	5.1	5.3	5.1	4.4	4.4	4.6		3.7	4.2				229.7	
236.2	5.1	5.1	4.9	4.0	4.2	4.6		3.5	4.0				236.2	
242.8	4.9	4.9	4.9	3.7	4.2	4.4		3.3	3.7				242.8	
249.3	4.4	4.6	4.9	3.5	3.7	4.2			3.7				249.3	
255.9	4.2	4.4	4.9		3.5	4.0			3.3				255.9	
262.5	3.7	4.2	4.6		3.1	3.7			3.1				262.5	
269.0	3.5	3.7				3.5							269.0	
275.6	3.3	3.3				3.3							275.6	
282.2	2.9	3.3											282.2	
288.7	2.4	2.9											288.7	
295.3		2.6											295.3	
组合 combination	222211			222221			222222			333333			组合 combination	













起重性能表
Lifting capacities





T 212.6~245.4ft

 212.6-245.4ft      212.6+7 ft 229.0+7 ft 245.4+7 ft 										
19.7 ft				19.7 ft			19.7 ft			
0°			40°	0°	20°	40°	0°	20°	40°	
59.1	57.3			48.5						59.1
65.6	55.3	54.0		46.7			33.3			65.6
72.2	54.5	51.6		45.2	38.6		32.8			72.2
78.7	53.4	48.3	44.5	44.1	37.5	31.5	30.4	27.6		78.7
85.3	52.5	46.7	44.1	41.7	34.2	30.9	29.1	26.9	23.8	85.3
91.9	51.1	45.2	41.7	39.5	33.5	29.8	27.6	24.9	22.9	91.9
98.4	45.2	42.3	40.6	37.5	32.6	28.7	26.2	24.3	22.0	98.4
105.0	39.9	41.9	39.5	36.4	31.8	26.9	25.6	23.1	21.6	105.0
111.5	37.3	36.2	37.3	34.6	30.9	26.7	24.3	22.7	20.5	111.5
118.1	31.3	31.7	34.2	32.8	28.9	26.2	23.1	22.0	20.3	118.1
124.7	26.9	27.6	30.6	30.6	28.2	25.8	22.7	20.3	19.0	124.7
131.2	23.6	23.6	26.7	26.5	26.9	24.7	22.0	20.1	18.7	131.2
137.8	20.7	21.4	22.5	24.3	25.8	24.3	21.2	19.0	18.1	137.8
144.4	18.3	17.9	18.7	21.2	22.5	23.4	20.5	18.5	17.2	144.4
150.9	15.7	15.9	15.4	18.1	19.2	20.1	19.4	17.9	17.2	150.9
157.5	13.2	13.7	13.7	15.4	16.3	19.4	17.4	15.9	15.9	157.5
164.0	11.0	11.2	11.5	12.8	13.7	14.6	14.8	15.9	13.9	164.0
170.6	8.8	8.8	9.0	10.4	11.2	11.9	12.3	13.4	11.7	170.6
177.2	6.6	6.8	6.8	8.2	9.0	9.5	10.1	11.0	11.5	177.2
183.7				6.4	6.8	7.3	8.2	9.0	9.3	183.7
190.3					4.9	5.3	6.6	7.1	7.1	190.3
196.9								5.1	5.5	196.9
组合 combinati on	222211			222221			222222			组合 combinati on

 212.6-245.4ft      212.6+7 ft 229.0+7 ft 245.4+7 ft 										
19.7 ft				19.7 ft			19.7 ft			
0°			40°	0°	20°	40°	0°	20°	40°	
59.1	57.3			48.5						59.1
65.6	55.3	54.0		46.7			33.3			65.6
72.2	54.5	51.6		45.2	38.6		32.8			72.2
78.7	53.4	48.3	44.5	43.0	37.5	31.5	30.4	27.6		78.7
85.3	50.7	46.7	44.1	41.7	34.2	30.9	29.1	26.9	23.8	85.3
91.9	46.7	45.2	41.7	39.5	33.5	29.8	27.6	24.9	22.9	91.9
98.4	40.8	41.9	40.6	37.5	32.4	28.7	26.2	24.3	22.0	98.4
105.0	35.3	38.1	40.3	35.9	31.3	26.9	25.6	23.1	21.6	105.0
111.5	30.4	33.1	34.6	32.6	30.0	26.7	24.3	22.7	20.5	111.5
118.1	26.5	28.4	29.3	28.2	26.0	25.8	23.1	22.0	20.3	118.1
124.7	22.0	23.8	25.1	24.0	22.3	25.4	22.7	20.1	19.0	124.7
131.2	18.3	20.1	21.2	20.3	18.5	23.1	22.0	19.6	18.7	131.2
137.8	14.8	16.5	17.6	17.0	15.4	19.6	19.2	18.7	18.1	137.8
144.4	11.9	13.2	14.1	14.1	12.8	16.3	16.1	17.6	17.0	144.4
150.9	9.0	10.4	11.2	11.5	10.1	13.2	13.4	14.8	15.4	150.9
157.5	6.6	7.7	8.4	9.0	5.5	10.6	11.0	12.1	12.8	157.5
164.0	4.4	5.3	6.0	6.8	5.5	8.2	8.8	9.7	10.4	164.0
170.6				4.6	4.4	5.7	6.6	7.5	8.2	170.6
组合 combinati on	222211			222221			222222			组合 combinati on

起重性能表
Lifting capacities




T 147.3~245.4ft

														
	147.3+7 ft				163.7+7 ft			180.1+7 ft			196.2+7 ft			
	39.4 ft			39.4 ft			39.4 ft			39.4 ft				
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°		
39.4	88.0												39.4	
42.7	81.6			74.3			70.1						42.7	
45.9	79.4			69.9			67.0						45.9	
52.5	70.5	48.9		64.4	43.7		61.7			58.4			52.5	
59.1	63.3	46.7	27.6	57.3	41.4		55.6	40.8		55.1			59.1	
65.6	58.4	44.5	27.1	55.1	38.6	26.9	53.6	39.7		52.9	37.5		65.6	
72.2	55.1	42.5	27.1	50.0	37.0	26.5	50.7	37.9	26.5	48.5	37.5		72.2	
78.7	51.1	40.3	27.1	47.4	35.3	26.0	46.7	37.5	26.5	46.7	35.3	26.5	78.7	
85.3	48.5	39.0	25.6	46.3	33.1	26.0	45.2	35.3	25.8	45.2	34.4	26.0	85.3	
91.9	43.2	37.5	25.6	43.4	32.0	25.6	42.5	34.0	24.9	43.0	33.1	25.6	91.9	
98.4	41.9	36.4	25.4	41.7	31.5	24.5	40.3	33.1	24.9	40.8	32.2	24.0	98.4	
105.0	36.6	35.3	24.5	38.1	30.9	24.5	38.1	32.0	24.0	38.6	30.9	24.0	105.0	
111.5	33.7	34.2	24.3	36.4	30.4	24.0	35.7	30.6	24.0	35.5	29.1	23.1	111.5	
118.1	29.8	33.1	24.0	31.3	29.5	23.8	31.3	29.3	23.6	32.0	28.7	23.1	118.1	
124.7	25.6	31.1	23.8	27.8	28.0	23.6	28.4	28.7	23.6	28.7	27.6	22.9	124.7	
131.2	21.6	26.9	23.6	24.3	24.7	23.1	25.1	27.6	23.4	24.9	25.1	22.9	131.2	
137.8	17.9	22.7	22.0	20.9	23.6	23.1	21.2	24.0	22.9	22.0	22.3	22.5	137.8	
144.4	15.2	19.0	15.4	17.6	20.3	21.8	17.9	19.8	22.0	18.3	18.5	22.3	144.4	
150.9	11.2	15.4		15.2	16.8	18.3	15.2	16.5	18.7	15.7	15.9	20.5	150.9	
157.5	8.4	12.1		11.5	13.7	15.0	11.9	13.2	15.4	12.6	13.0	17.4	157.5	
164.0		8.8		8.8	10.8	11.7	9.3	11.0	12.6	10.6	10.6	14.3	164.0	
170.6				6.6	8.2		6.6	8.6	9.9	8.4	8.4	11.5	170.6	
177.2					5.5			6.4		5.7	5.7	8.8	177.2	
183.7											5.5		183.7	
组合 combinati on	211110			211111			221111			222111			组合 combinati on	

										
	212.6+7 ft			229.0+7 ft			245.4+7 ft			
	39.4 ft			39.4 ft			39.4 ft			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	
52.5	51.8									52.5
59.1	49.4			37.0						59.1
65.6	46.7			35.7			27.6			65.6
72.2	45.2	34.0		32.8			24.9			72.2
78.7	43.2	33.1		30.9	24.9		24.3			78.7
85.3	41.9	32.0	26.0	28.7	23.1		23.1	17.6		85.3
91.9	39.9	30.9	24.9	28.2	22.5	19.4	20.7	17.6		91.9
98.4	37.9	29.8	24.3	26.2	21.2	19.0	20.3	16.1	14.3	98.4
105.0	35.7	28.9	23.8	25.4	21.2	18.3	19.4	15.7	12.8	105.0
111.5	33.5	26.5	22.9	24.7	20.7	17.9	18.3	14.8	12.8	111.5
118.1	31.5	26.5	22.7	23.1	19.2	17.2	17.4	14.3	11.9	118.1
124.7	29.3	26.0	22.5	22.5	18.5	16.8	16.3	13.2	11.9	124.7
131.2	27.1	24.7	21.8	21.6	18.1	15.4	15.9	13.2	11.0	131.2
137.8	22.0	24.3	21.6	19.8	17.0	15.4	15.2	11.7	10.6	137.8
144.4	18.7	23.1	21.4	19.8	16.5	14.6	13.7	11.7	10.6	144.4
150.9	17.4	19.8	20.5	18.7	16.1	14.3	13.2	11.0	9.9	150.9
157.5	14.3	16.5	19.2	16.5	14.8	14.3	13.0	11.0	9.5	157.5
164.0	11.7	13.4	16.1	13.9	14.3	13.4	11.9	9.9	9.3	164.0
170.6	9.0	11.0	13.2	11.7	13.2	13.2	11.5	9.9	9.0	170.6
177.2	7.1	8.8	10.8	9.5	11.0	12.8	11.0	9.5	8.6	177.2
183.7	5.1	6.8	8.4	7.5	8.8	10.4	9.3	9.3	8.4	183.7
190.3		5.3		5.5	7.1	8.2	7.5	8.8	7.7	190.3
196.9					5.3		5.7	6.6	7.7	196.9
203.4								5.5		203.4
组合 combinati on	222211			222221			222222			组合 combinati on

起重性能表
Lifting capacities





T 147.3~245.4ft

															
	147.3+7 ft				163.7+7 ft			180.1+7 ft			196.2+7 ft				
	39.4 ft			39.4 ft			39.4 ft			39.4 ft					
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°			
39.4	88.0												39.4		
42.7	81.6				74.3			70.1					42.7		
45.9	79.4				69.9			67.0					45.9		
52.5	70.5	48.9			64.4	43.7		61.7			58.4		52.5		
59.1	63.3	46.7	27.6		57.3	41.4		55.6	40.8		55.1		59.1		
65.6	58.4	44.5	27.1		55.1	38.6	26.9	53.6	39.7		52.9	37.5	65.6		
72.2	54.7	42.5	27.1		50.0	37.0	26.5	50.7	37.9	26.5	48.5	37.5	72.2		
78.7	46.3	40.3	27.1		46.7	35.3	26.0	46.7	37.5	26.5	44.1	35.3	26.5	78.7	
85.3	38.8	39.0	25.6		41.9	33.1	26.0	40.1	35.3	25.8	39.7	34.4	26.0	85.3	
91.9	32.0	37.3	25.6		35.7	32.0	25.6	33.7	34.0	24.9	33.7	33.1	25.6	91.9	
98.4	26.5	34.6	25.4		29.3	31.5	24.5	29.5	30.9	24.9	28.7	29.8	24.0	98.4	
105.0	21.4	28.7	24.3		24.7	29.1	24.5	24.7	28.0	24.0	25.1	28.9	24.0	105.0	
111.5	17.0	23.1	24.3		20.3	24.5	23.8	20.3	24.3	23.6	21.4	24.9	23.1	111.5	
118.1	12.8	18.7	19.6		16.1	19.8	22.5	16.3	20.3	22.9	17.4	21.2	22.7	118.1	
124.7	9.0	14.6	15.2		12.3	15.9	18.5	12.6	16.3	19.2	13.7	17.4	20.1	124.7	
131.2	5.5	11.0	11.0		9.0	12.3	14.6	9.3	12.8	15.2	10.4	13.9	16.3	131.2	
137.8		7.5	7.3		6.0	9.0	11.0	6.2	9.5	11.7	7.3	10.6	13.0	137.8	
144.4					4.4	6.0	7.7	4.4	6.4	8.4	4.6	7.7	9.7	144.4	
150.9						4.4	4.6		4.4	5.5		5.1	6.8	150.9	
157.5													4.4	157.5	
组合 combinati on	211110			211111			221111			222111			组合 combinati on		

										
	212.6+7 ft			229.0+7 ft			245.4+7 ft			
	39.4 ft			39.4 ft			39.4 ft			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	
52.5	51.8									52.5
59.1	49.4			37.0						59.1
65.6	46.7			35.7			27.6			65.6
72.2	45.2	34.0		32.8			24.9			72.2
78.7	43.2	33.1		30.9	24.9		24.3			78.7
85.3	41.2	32.0	26.0	28.7	23.1		23.1	17.6		85.3
91.9	35.3	30.9	24.9	28.2	22.5	19.4	20.7	17.6		91.9
98.4	30.9	29.8	24.3	26.2	21.2	19.0	20.3	16.1	14.3	98.4
105.0	26.5	28.9	23.8	25.1	21.2	18.3	19.4	15.7	12.8	105.0
111.5	22.5	25.1	22.9	24.3	20.7	17.9	18.3	14.8	12.8	111.5
118.1	19.0	22.5	22.5	20.7	19.2	17.2	17.4	14.3	11.9	118.1
124.7	15.4	19.0	21.6	17.2	18.5	16.8	16.1	13.2	11.9	124.7
131.2	12.1	15.4	18.1	13.9	17.4	15.4	15.7	13.0	10.8	131.2
137.8	9.0	12.3	14.6	11.0	14.1	15.4	12.8	11.5	10.4	137.8
144.4	6.4	9.3	11.5	8.2	11.2	13.2	10.1	11.5	10.4	144.4
150.9	4.4	6.6	8.6	5.7	8.6	10.6	7.7	10.4	9.7	150.9
157.5		4.4	6.0	4.4	6.2	7.9	5.5	7.9	9.3	157.5
164.0			4.4		4.4	5.5	4.4	5.7	7.3	164.0
170.6						4.4		4.4	5.3	170.6
177.2									4.4	177.2
组合 combinati on	222211			222221			222222			组合 combinati on

起重性能表
Lifting capacities


T 147.3~245.4ft

														
	147.3+7 ft				163.7+7 ft			180.1+7 ft			196.2+7 ft			
	59.1 ft			59.1 ft			59.1 ft			59.1 ft				
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°		
42.7	62.6			57.3									42.7	
45.9	59.5			56.4			53.8						45.9	
52.5	55.3			50.7			50.7			47.4			52.5	
59.1	48.9	32.0		46.5			46.3			45.9			59.1	
65.6	46.3	29.8		43.7	29.3		44.8			41.9			65.6	
72.2	42.8	29.3		42.3	28.7		41.4	26.9		39.7			72.2	
78.7	40.1	27.1	17.9	39.7	27.6	17.6	39.2	26.5		37.5	25.4		78.7	
85.3	37.3	26.5	17.2	36.4	26.5	17.2	36.4	25.4	16.8	35.3	23.1		85.3	
91.9	35.3	25.4	16.5	35.3	25.4	16.3	34.2	23.6	16.8	34.2	23.1	15.9	91.9	
98.4	32.8	24.3	15.9	33.3	23.6	16.3	32.0	23.4	15.9	31.3	22.0	15.4	98.4	
105.0	31.1	23.1	15.7	32.2	23.6	15.2	30.4	22.3	15.7	30.6	21.6	15.4	105.0	
111.5	30.2	23.1	15.4	29.8	22.0	15.2	30.4	21.6	15.0	28.7	21.2	15.4	111.5	
118.1	28.1	21.4	15.0	28.9	21.6	14.6	27.6	21.6	15.0	27.6	21.2	15.2	118.1	
124.7	26.7	20.9	15.0	27.6	21.4	14.6	26.5	20.5	14.3	26.5	19.6	14.3	124.7	
131.2	24.7	20.3	14.3	26.7	20.3	14.6	25.6	19.8	14.3	24.5	19.2	14.3	131.2	
137.8	21.2	19.4	14.3	23.4	19.6	14.3	23.6	19.4	14.3	23.8	18.5	14.1	137.8	
144.4	17.6	19.0	13.9	19.8	19.2	14.3	20.1	18.7	14.1	20.9	17.4	14.1	144.4	
150.9	14.6	18.3	11.7	17.0	18.5	14.3	17.0	17.9	14.1	17.9	17.4	13.9	150.9	
157.5	11.7	15.0	9.5	14.1	17.6	14.1	14.1	17.2	14.1	15.0	16.5	13.9	157.5	
164.0	9.0	11.9	7.3	11.2	14.6	13.2	11.5	15.0	13.2	12.1	16.1	13.9	164.0	
170.6	6.6	9.3		9.0	12.1	11.2	9.3	12.1	11.2	9.9	13.4	13.2	170.6	
177.2		6.6		6.8	9.7		7.1	9.9		7.7	10.8	9.9	177.2	
183.7					7.3			7.7		5.7	8.6	8.8	183.7	
190.3					5.1			5.5			6.4	6.6	190.3	
组合 combinati on	211110			211111			221111			222111			组合 combinati on	

										
	212.6+7 ft			229.0+7 ft			245.4+7 ft			
	59.1 ft			59.1 ft			59.1 ft			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	
59.1	40.8									59.1
65.6	38.6			28.7			21.8			65.6
72.2	37.9			25.4			19.2			72.2
78.7	35.3			24.3			18.5			78.7
85.3	33.1	22.0		24.0			17.0			85.3
91.9	31.5	22.0		21.8	16.5		16.3	14.1		91.9
98.4	29.1	21.2	15.7	21.6	15.4		15.0	12.3		98.4
105.0	28.7	21.2	15.7	19.8	14.8	13.2	15.0	12.3		105.0
111.5	26.9	19.8	15.2	17.6	14.1	12.1	13.7	11.2	10.1	111.5
118.1	26.0	19.2	15.0	17.6	12.6	12.1	13.2	11.2	9.9	118.1
124.7	23.4	18.7	14.1	16.5	12.6	11.7	12.3	10.1	9.5	124.7
131.2	23.4	18.1	14.1	16.3	11.7	11.2	11.0	9.9	9.3	131.2
137.8	22.0	16.8	14.1	15.2	11.7	11.0	10.6	9.9	8.8	137.8
144.4	22.0	16.8	14.1	14.6	11.0	10.8	10.4	8.8	8.4	144.4
150.9	19.2	15.9	13.2	14.1	11.0	10.6	10.1	8.8	8.2	150.9
157.5	16.3	15.9	13.2	13.0	10.4	10.4	8.8	8.4	7.9	157.5
164.0	13.7	15.0	13.2	13.0	10.4	9.5	8.8	8.2	7.1	164.0
170.6	11.2	14.6	13.2	11.5	9.7	9.3	8.2	7.9	7.1	170.6
177.2	9.0	12.3	9.9	10.8	9.5	9.0	7.7	7.7	6.6	177.2
183.7	7.1	9.9	8.8	8.6	9.0	8.4	7.7	7.3	6.2	183.7
190.3	5.3	7.9	8.4	6.8	8.8	8.2	7.3	6.4	6.2	190.3
196.9		6.0		5.1	7.7	7.9	7.1	6.2	5.7	196.9
203.4					5.7		5.3	6.0	5.7	203.4
210.0								5.7	5.5	210.0
216.5								5.3		216.5
组合 combinati on	222211			222221			222222			组合 combinati on

起重性能表
Lifting capacities




T 147.3~245.4ft

 147.3-245.4ft  59.1ft 29.3ft×28ft  132277 lb 													
147.3+7 ft				163.7+7 ft			180.1+7 ft			196.2+7 ft			
59.1 ft				59.1 ft			59.1 ft			59.1 ft			
0°	20°	40°		0°	20°	40°	0°	20°	40°	0°	20°	40°	
42.7	62.6			57.3									42.7
45.9	59.5			56.4			53.8						45.9
52.5	55.3			50.7			50.7			47.4			52.5
59.1	48.9	32.0		46.5			46.3			45.9			59.1
65.6	46.3	29.8		43.7	29.3		44.8			41.9			65.6
72.2	42.8	29.3		42.3	28.7		41.4	26.9		39.7			72.2
78.7	40.1	27.1	17.9	39.7	27.6	17.6	39.2	26.5		37.5	25.4		78.7
85.3	36.8	26.5	17.2	35.7	26.5	17.2	36.4	25.4	16.8	35.3	23.1		85.3
91.9	34.8	25.4	16.5	34.8	25.4	16.3	32.8	23.6	16.8	32.6	23.1	15.9	91.9
98.4	29.3	24.3	15.9	31.1	23.6	16.3	30.6	23.4	15.9	29.5	22.0	15.4	98.4
105.0	24.3	22.7	15.7	26.5	23.1	15.2	26.5	22.3	15.7	26.9	21.6	15.4	105.0
111.5	20.1	22.7	15.4	22.5	21.8	15.2	22.3	21.6	15.0	22.9	20.9	15.4	111.5
118.1	15.9	21.2	14.8	18.7	21.4	14.6	18.5	21.6	15.0	19.4	20.9	15.2	118.1
124.7	12.1	17.9	14.8	15.0	20.3	14.3	15.0	20.3	14.3	15.7	19.6	14.3	124.7
131.2	9.0	13.9	14.3	11.7	16.8	14.3	11.7	16.8	14.1	12.3	17.6	14.1	131.2
137.8	5.7	10.4	13.9	8.6	13.2	14.3	8.6	13.4	14.1	9.5	14.3	14.1	137.8
144.4	4.4	7.3	10.4	6.0	10.1	13.2	6.0	10.4	13.7	6.6	11.2	13.9	144.4
150.9		4.4	7.1	4.4	7.5	10.1	4.4	7.5	10.6	4.4	8.4	11.5	150.9
157.5			4.4		4.9	7.3		5.1	7.7		6.0	8.8	157.5
164.0						4.4			5.1		4.4	6.2	164.0
170.6												4.4	170.6
组合 combinati on	211110			211111			221111			222111			组合 combinati on

										
	212.6+7 ft			229.0+7 ft			245.4+7 ft			
	59.1 ft			59.1 ft			59.1 ft			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	
59.1	40.8									59.1
65.6	38.6			28.7			21.8			65.6
72.2	37.9			25.4			19.2			72.2
78.7	35.3			24.3			18.5			78.7
85.3	33.1	22.0		24.0			17.0			85.3
91.9	31.5	22.0		21.8	16.5		16.3	14.1		91.9
98.4	29.1	21.2	15.7	21.6	15.4		15.0	12.3		98.4
105.0	27.6	21.2	15.7	19.8	14.8	13.2	15.0	12.3		105.0
111.5	24.3	19.8	15.2	17.6	14.1	12.1	13.7	11.2	10.1	111.5
118.1	20.5	19.2	15.0	17.6	12.6	12.1	13.2	11.2	9.9	118.1
124.7	17.0	18.7	14.1	16.5	12.6	11.7	12.3	10.1	9.5	124.7
131.2	13.7	18.1	14.1	15.2	11.7	11.2	10.8	9.9	9.3	131.2
137.8	10.8	15.4	13.9	12.3	11.7	11.0	10.4	9.7	8.6	137.8
144.4	7.9	12.6	13.9	9.7	11.0	10.8	9.9	8.6	8.2	144.4
150.9	5.5	9.7	12.8	7.1	11.0	10.4	8.8	8.4	7.9	150.9
157.5	4.4	7.3	10.1	4.9	8.8	9.9	6.6	7.9	7.7	157.5
164.0		4.9	7.5	4.4	6.4	9.0	4.4	7.7	6.6	164.0
170.6		4.4	5.3		4.4	7.9	4.4	7.5	6.2	170.6
177.2			4.4			5.7		5.1	5.7	177.2
183.7									5.3	183.7
组合 combinati on	222211			222221			222222			组合 combinati on




起重性能表
Lifting capacities

T 147.3~245.4ft

 147.3-245.4ft  78.7ft  360°  220461 lb  														
147.3+7 ft				163.7+7 ft			180.1+7 ft			196.2+7 ft				
78.7 ft				78.7 ft			78.7 ft			78.7 ft				
0°	20°	40°		0°	20°	40°	0°	20°	40°	0°	20°	40°		
52.5	44.1			41.9									52.5	
59.1	41.9			40.1			38.8						59.1	
65.6	37.5	25.6		37.9			35.9			33.1			65.6	
72.2	34.2	24.5		35.3	22.0		33.3			32.6			72.2	
78.7	32.0	23.8		32.4	20.9		31.7	20.5		30.0			78.7	
85.3	29.8	22.5		30.9	19.8		30.0	19.0		28.7	18.1		85.3	
91.9	28.7	20.9	11.9	29.3	19.8	11.9	26.7	19.0		26.5	18.5		91.9	
98.4	26.7	20.9	11.0	26.5	17.9	10.8	25.8	17.6	11.2	25.4	16.8		98.4	
105.0	24.5	19.4	10.8	25.8	17.2	10.6	24.7	17.0	11.0	24.3	16.1	10.6	105.0	
111.5	23.1	19.0	10.4	23.8	16.8	10.4	23.6	16.3	10.4	23.1	15.7	9.7	111.5	
118.1	22.5	18.3	10.1	22.7	16.1	9.9	22.5	15.9	10.1	20.3	14.3	9.5	118.1	
124.7	21.4	17.6	10.1	21.6	15.7	9.5	20.9	15.4	9.5	19.8	14.1	9.3	124.7	
131.2	20.3	17.2	9.5	19.8	15.0	9.5	19.8	14.3	9.5	18.7	13.4	9.0	131.2	
137.8	18.7	16.5	9.5	19.6	14.3	9.0	18.5	14.3	9.3	18.3	13.4	8.8	137.8	
144.4	17.9	16.1	9.0	17.9	13.4	9.0	18.5	13.2	9.3	18.3	12.6	8.6	144.4	
150.9	16.8	15.2	9.0	17.2	13.0	8.8	17.2	13.2	8.8	17.0	12.3	8.6	150.9	
157.5	14.3	15.2	9.0	16.5	13.0	8.8	16.5	12.3	8.8	16.3	12.1	8.4	157.5	
164.0	11.7	14.3	8.8	13.9	12.3	8.8	13.7	12.1	8.8	14.3	12.1	8.4	164.0	
170.6	9.3	14.1	8.8	11.5	11.9	8.8	11.2	11.9	8.6	11.9	11.2	8.4	170.6	
177.2	7.1	13.0	8.8	9.5	11.7	8.8	9.0	11.7	8.6	9.7	10.8	8.2	177.2	
183.7		10.6	8.6	7.3	10.8	8.8	7.1	11.0	8.6	7.5	9.9	8.2	183.7	
190.3		8.2	8.6	5.4	8.6	8.8	5.1	9.0	8.6	6.0	9.5	8.2	190.3	
196.9					6.4	8.8		6.8	8.2		7.3	8.2	196.9	
203.4								4.6	7.9		5.5	7.5	203.4	
210.0									6.6			5.5	210.0	
组合														组合
组合 combinati on	212.6+7 ft			229.0+7 ft			245.4+7 ft						组合 combinati on	
	78.7 ft			78.7 ft			78.7 ft							
	0°	20°	40°	0°	20°	40°	0°	20°	40°					
	65.6	30.9		22.5										
	72.2	28.7		21.4					13.9					
	78.7	26.9		19.2					13.2					
	85.3	26.0		18.3					13.2					
	91.9	25.4	16.3	16.1					11.9					
	98.4	24.7	15.9	16.1	11.0				11.7	10.6				
	105.0	22.0	14.3	14.6	9.7				9.9	9.3				
	111.5	21.4	14.3	10.4	14.6	9.5	7.5	9.5	9.3					
	118.1	19.4	14.3	9.5	13.2	9.3	7.3	9.3	8.6	5.7				
	124.7	19.4	12.8	9.3	12.1	8.4	7.1	8.8	8.2	4.9				
	131.2	19.2	12.6	9.3	12.1	8.2	6.6	7.7	7.9	4.6				
	137.8	17.2	12.6	8.8	11.0	7.9	6.4	7.7	7.7	4.4				
144.4	16.5	11.7	8.8	10.6	7.5	6.2	7.1	7.3	4.4					
150.9	16.1	11.5	8.6	10.6	7.3	4.6	7.1	7.1						
157.5	15.4	11.2	8.6	9.7	7.1	4.6	6.2	5.7						
164.0	13.9	10.8	8.6	8.8	6.8	4.6	6.0	5.5						
170.6	13.0	10.6	8.4	8.8	6.6	4.6	5.7	5.3						
177.2	10.8	10.4	8.4	7.9	6.4	4.4	5.5	5.3						
183.7	8.8	10.1	8.4	7.9	6.0	4.4	5.1	5.1						
190.3	7.1	9.9	7.9	7.5	4.9	4.4	4.6	4.9						
196.9	5.3	8.8	7.9	6.6	4.9	4.4	4.4	4.9						
203.4		6.6	7.5	4.6	4.9	4.4	4.4							
210.0		4.9	6.8		4.4	4.4	4.4							
216.5			5.1		4.4	4.4	4.4							
组合													组合	
combinati on	222211			222221			222222						组合 combinati on	

起重性能表
Lifting capacities





T 147.3~245.4ft

														
	147.3+7 ft				163.7+7 ft			180.1+7 ft			196.2+7 ft			
	78.7 ft			78.7 ft			78.7 ft			78.7 ft				
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°		
52.5	44.1			41.9									52.5	
59.1	41.9			40.1			38.8						59.1	
65.6	37.5	25.6		37.9			35.9			33.1			65.6	
72.2	34.2	24.5		35.3	22.0		33.3			32.6			72.2	
78.7	32.0	23.8		32.4	20.9		31.7	20.5		30.0			78.7	
85.3	29.8	22.5		30.9	19.8		30.0	19.0		28.7	18.1		85.3	
91.9	28.7	20.9	11.9	29.3	19.8	11.9	26.5	19.0		26.5	18.5		91.9	
98.4	26.5	20.9	11.0	26.5	17.9	10.8	25.4	17.6	11.2	25.4	16.8		98.4	
105.0	24.0	19.4	10.8	24.9	17.2	10.6	24.5	17.0	11.0	24.3	16.1	10.6	105.0	
111.5	22.3	19.0	10.4	23.1	16.8	10.4	23.1	16.3	10.4	22.9	15.7	9.7	111.5	
118.1	19.0	17.9	10.1	20.9	16.1	9.9	20.3	15.7	10.1	20.1	14.3	9.5	118.1	
124.7	15.2	17.2	10.1	17.4	15.4	9.5	17.0	15.2	9.3	17.4	14.1	9.3	124.7	
131.2	11.9	16.8	9.5	13.9	14.6	9.5	13.7	13.9	9.3	14.1	13.4	9.0	131.2	
137.8	8.8	16.1	9.5	11.0	13.9	8.8	10.8	13.9	9.0	11.2	13.4	8.6	137.8	
144.4	6.2	14.1	8.8	8.4	13.4	8.8	7.9	13.2	9.0	8.6	12.1	8.4	144.4	
150.9	4.4	11.0	8.8	5.7	11.0	8.8	5.5	11.0	8.6	6.0	11.7	8.4	150.9	
157.5		8.4	8.8	4.4	8.4	8.6	4.4	8.4	8.6	4.4	9.0	8.2	157.5	
164.0		5.5	4.9		6.0	8.6		6.0	8.6		6.6	8.2	164.0	
170.6			4.4		4.4	6.8		4.4	7.1		4.4	7.9	170.6	
177.2						4.4			4.6			5.5	177.2	
183.7												4.4	183.7	
组合 combinati on	211110			211111			221111			222111			组合 combinati on	

	212.6+7 ft									
	78.7 ft			78.7 ft			78.7 ft			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	
65.6	30.9			22.5						65.6
72.2	28.7			21.4			13.9			72.2
78.7	26.9			19.2			13.2			78.7
85.3	26.0			18.3			13.2			85.3
91.9	25.4	16.3		16.1			11.9			91.9
98.4	24.7	15.9		16.1	11.0		11.7	10.6		98.4
105.0	22.0	14.3		14.6	9.7		9.9	9.3		105.0
111.5	21.2	14.3	10.4	14.6	9.5	7.5	9.5	9.3		111.5
118.1	19.0	14.3	9.5	13.2	9.3	7.3	9.3	8.6	5.3	118.1
124.7	18.3	12.8	9.3	12.1	8.4	7.1	8.6	8.2	4.6	124.7
131.2	15.0	12.6	9.3	11.9	7.9	6.6	6.8	7.7	4.4	131.2
137.8	12.3	12.3	8.8	10.8	7.7	6.4	6.8	7.3	4.4	137.8
144.4	9.5	11.5	8.6	10.4	7.3	6.2	6.4	6.8		144.4
150.9	7.1	11.2	8.4	8.2	7.1	4.6	6.4	6.6		150.9
157.5	4.9	10.1	8.4	6.0	6.8	4.4	5.7	5.3		157.5
164.0		7.7	8.4	4.4	6.4	4.4	5.5	5.1		164.0
170.6		5.5	8.2		6.4	4.4	4.4	4.9		170.6
177.2		4.4	6.8		4.9	4.4		4.9		177.2
183.7			4.6			4.4				183.7
190.3						4.4				190.3
组合 combinati on	222211			222221			222222			组合 combinati on

起重性能表
Lifting capacities


T 147.3~245.4ft

	 													
	147.3+7 ft				163.7+7 ft			180.1+7 ft			196.2+7 ft			
	98.4 ft				98.4 ft			98.4 ft			98.4 ft			
	0°	20°	40°		0°	20°	40°	0°	20°	40°	0°	20°	40°	
59.1	33.1												59.1	
65.6	30.9			30.4									65.6	
72.2	28.7			28.7			26.5			25.4			72.2	
78.7	26.5	18.7		27.3			26.5			24.3			78.7	
85.3	24.9	18.3		24.3	15.9		24.0			23.4			85.3	
91.9	22.5	18.1		23.1	15.2		23.1	14.8		21.6	13.9		91.9	
98.4	21.8	16.5		22.0	14.8		21.2	14.1		20.7	12.6		98.4	
105.0	20.7	16.1	7.7	21.2	14.1		21.2	13.7		20.7	12.6		105.0	
111.5	19.6	15.4	7.5	20.3	13.7	7.7	18.3	12.3	7.9	17.9	11.7		111.5	
118.1	18.5	15.0	7.3	17.6	13.0	7.3	18.3	12.3	7.5	17.6	11.7	7.5	118.1	
124.7	16.8	14.3	7.1	17.6	11.9	7.3	17.9	11.5	6.6	16.3	10.8	6.4	124.7	
131.2	16.1	13.9	6.8	15.7	11.9	6.6	16.1	11.5	6.6	15.9	10.4	6.4	131.2	
137.8	14.8	12.8	6.2	15.4	11.0	6.6	15.4	10.6	6.6	15.7	9.9	6.0	137.8	
144.4	14.6	12.8	6.2	15.4	10.6	6.2	15.2	10.4	6.2	14.6	9.7	6.0	144.4	
150.9	14.6	11.9	5.7	14.3	10.6	6.2	14.1	9.9	6.2	13.0	9.5	5.7	150.9	
157.5	13.2	11.9	5.7	13.7	9.9	6.0	12.8	9.7	6.0	13.0	9.3	5.7	157.5	
164.0	12.1	11.7	5.5	13.2	9.5	6.0	12.8	9.5	6.0	13.0	9.0	5.5	164.0	
170.6	11.5	11.0	5.5	11.9	9.3	6.0	12.8	9.0	6.0	11.5	8.8	5.5	170.6	
177.2	9.5	10.8	5.5	11.9	9.0	6.0	11.2	8.8	5.7	11.5	8.6	5.5	177.2	
183.7	7.3	10.1	5.5	9.5	8.2	5.7	9.3	8.6	5.7	9.5	8.2	5.5	183.7	
190.3	5.5	10.1	5.5	7.5	8.2	5.5	7.3	7.5	5.7	7.7	7.5	5.5	190.3	
196.9		9.9	5.5	5.7	7.9	5.5	5.5	7.5	5.7	6.0	7.5	5.5	196.9	
203.4		7.7	5.5		7.9	5.5		7.1	5.7		6.6	5.5	203.4	
210.0			5.5		6.2	5.5		6.0	5.7		6.6	5.5	210.0	
216.5			5.3			5.3			5.5		4.9	5.5	216.5	
223.1						5.1			5.5			5.3	223.1	
组合 combinati on	211110			211111			221111			222111			组合 combinati on	

										
	212.6+7 ft			229.0+7 ft			245.4+7 ft			
	98.4 ft			98.4 ft			98.4 ft			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	
78.7	22.0			16.5			11.5			78.7
85.3	21.8			13.9			11.0			85.3
91.9	20.3			13.9			9.0			91.9
98.4	19.4	13.4		12.8			8.8			98.4
105.0	17.2	13.4		12.1	9.9		8.4	6.6		105.0
111.5	17.0	12.3		11.5	9.3		8.2	6.6		111.5
118.1	15.9	12.1	7.5	11.0	8.4		6.4	4.9		118.1
124.7	15.4	12.1	6.6	9.7	8.2	4.9	6.2	4.9		124.7
131.2	14.8	11.0	6.4	9.7	7.7	4.9	4.6	4.6		131.2
137.8	14.3	10.8	6.2	7.9	7.5	4.6	4.6	4.4		137.8
144.4	13.7	10.6	5.5	7.9	7.3	4.4	4.4			144.4
150.9	13.2	10.4	5.5	7.3	6.8	4.4	4.4			150.9
157.5	11.2	10.1	5.3	6.8	6.2	4.4				157.5
164.0	11.2	9.9	5.3	6.6	6.0	4.4				164.0
170.6	10.4	9.5	5.3	6.6	5.3					170.6
177.2	10.1	7.9	5.3	6.4						177.2
183.7	10.1	7.9	5.1	6.0						183.7
190.3	8.4	7.9	5.1	5.7						190.3
196.9	6.6	7.9	4.9	5.5						196.9
203.4	5.1	7.7	4.9	4.4						203.4
210.0		7.7	4.6							210.0
216.5		6.8	4.6							216.5
223.1		6.8	4.6							223.1
229.7		6.6								229.7
组合 combinati on	222211			222221			222222			组合 combinati on

起重性能表
Lifting capacities





T 147.3~245.4ft

 147.3-245.4ft  98.4ft 29.3ft×28ft  132277 lb 													
147.3+7 ft				163.7+7 ft			180.1+7 ft			196.2+7 ft			
98.4 ft			98.4 ft			98.4 ft			98.4 ft				
0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°		
59.1	33.1												59.1
65.6	30.9			30.4									65.6
72.2	28.7			28.7			26.5			25.4			72.2
78.7	26.5	18.7		27.3			26.5			24.3			78.7
85.3	24.9	18.1		24.3	15.9		24.0			23.4			85.3
91.9	22.5	18.1		23.1	15.2		23.1	14.8		21.6	13.9		91.9
98.4	21.8	16.5		22.0	14.8		21.2	14.1		20.7	12.6		98.4
105.0	20.5	16.1	7.7	21.2	14.1	8.6	21.2	13.7		20.7	12.6		105.0
111.5	19.4	15.2	7.5	20.3	13.7	7.7	18.3	12.3	7.9	17.4	11.7		111.5
118.1	18.3	14.8	7.3	17.6	13.0	7.3	17.9	12.3	7.5	17.2	11.7	7.5	118.1
124.7	14.3	14.1	7.1	17.2	11.9	7.3	17.4	11.5	6.6	15.9	10.8	6.4	124.7
131.2	14.1	13.7	6.8	15.7	11.7	6.6	15.4	11.5	6.6	15.4	10.4	6.4	131.2
137.8	11.0	12.6	6.2	13.0	10.6	6.6	12.3	10.4	6.6	12.8	9.7	6.0	137.8
144.4	8.4	12.1	6.2	10.1	10.1	6.0	9.7	9.9	6.0	10.1	9.5	6.0	144.4
150.9	6.0	11.2	5.7	7.7	10.1	6.0	7.3	9.5	6.0	7.5	9.3	5.5	150.9
157.5	4.4	10.8	5.7	5.5	9.5	5.7	5.1	9.3	5.7	5.3	8.8	5.5	157.5
164.0		8.8	5.5	4.4	9.0	5.7	4.4	9.0	5.5	4.4	8.6	5.3	164.0
170.6		6.6	5.5		6.8	5.5		6.6	5.5		7.1	5.3	170.6
177.2			5.5		4.9	5.5		4.6	5.3		5.1	5.3	177.2
183.7			4.4		4.4	5.3			5.3		4.4	5.3	183.7
190.3						4.4			4.4			5.1	190.3
196.9												4.4	196.9
组合 combinati on	211110			211111			221111			222111			组合 combinati on

 212.6+7 ft 229.0+7 ft 245.4+7 ft 									
98.4 ft				98.4 ft			98.4 ft		
0°	20°	40°		0°	20°	40°	0°	20°	40°
78.7	22.0			16.5			11.5		
85.3	21.8			13.9			11.0		
91.9	20.3			13.9			9.0		
98.4	19.4	13.4		12.8			8.8		
105.0	17.2	13.4		12.1	9.9		8.4	6.6	
111.5	17.0	12.3		11.5	9.3		8.2	6.2	
118.1	15.7	12.1	7.5	11.0	8.4		6.4	4.6	
124.7	15.2	11.7	6.6	9.7	8.2	4.9	6.2	4.6	
131.2	14.6	10.6	6.4	9.7	7.5	4.9	4.6	4.4	
137.8	13.4	10.4	6.2	7.9	7.3	4.6	4.4	4.4	
144.4	10.8	10.1	5.5	7.7	6.8	4.4	4.4		
150.9	8.4	9.9	5.5	7.3	6.4	4.4	4.4		
157.5	6.2	9.7	5.3	7.1	5.5	4.4			
164.0	4.4	9.5	5.3	5.3	5.5	4.4			
170.6		8.8	5.1	4.4	4.9				
177.2		7.7	5.1						
183.7		5.7	5.1						
190.3			5.1						
196.9			4.4						
组合 combinati on	222211			222221			222222		

起重性能表
Lifting capacities





T 147.3~245.4ft

														
	147.3+7 ft				163.7+7 ft			180.1+7 ft			196.2+7 ft			
	118.1 ft			118.1 ft			118.1 ft			118.1 ft				
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°		
59.1	30.9												59.1	
65.6	27.3			25.6									65.6	
72.2	26.0			23.4			22.7			22.0			72.2	
78.7	24.3			23.4			21.6			21.2			78.7	
85.3	20.9			20.9			20.7			18.7			85.3	
91.9	19.8	12.6		19.8			18.3			17.6			91.9	
98.4	18.7	11.7		17.9	10.8		17.6			15.7			98.4	
105.0	17.6	11.0		17.0	10.8		16.8	10.8		15.7			105.0	
111.5	15.9	9.9		16.1	9.3		14.8	10.6		14.3	10.1		111.5	
118.1	15.0	9.9		14.6	9.0		14.8	10.6		13.9	9.9		118.1	
124.7	13.7	9.7		14.6	9.0		13.4	9.9		13.2	9.9		124.7	
131.2	13.7	8.6	4.9	13.0	8.2	4.9	12.8	9.5		12.6	9.3		131.2	
137.8	12.3	8.2	4.4	12.6	7.9	4.6	12.3	9.3	4.9	12.1	9.3	4.6	137.8	
144.4	11.7	8.2	4.4	11.9	7.5	4.6	10.8	9.0	4.9	11.7	8.8	4.6	144.4	
150.9	11.0	7.3	4.4	11.5	7.3	4.4	10.8	8.6	4.6	9.9	8.4	4.4	150.9	
157.5	10.6	7.1	4.4	9.9	7.1	4.4	10.6	8.2	4.4	9.7	7.9	4.4	157.5	
164.0	10.1	6.8	4.4	9.9	6.8	4.4	9.5	7.9	4.4	9.0	7.7	4.4	164.0	
170.6	9.5	6.4	4.4	9.9	6.4	4.4	9.3	7.1	4.4	9.0	7.1	4.4	170.6	
177.2	8.6	6.2	4.4	8.6	6.4	4.4	8.6	7.1	4.4	8.4	6.6	4.4	177.2	
183.7	8.4	6.0	4.4	8.4	5.3	4.4	8.4	6.8	4.4	7.9	6.6	4.4	183.7	
190.3	7.5	5.3	4.4	8.4	5.3	4.4	7.9	6.2	4.4	7.5	5.7	4.4	190.3	
196.9	5.7	5.3	4.4	7.3	5.3	4.4	6.6	5.7	4.4	6.6	5.3	4.4	196.9	
203.4		5.1	4.4	5.5	4.9	4.4		5.3	4.4	5.3	5.3	4.4	203.4	
210.0		5.1	4.4		4.9	4.4		4.9	4.4		4.9		210.0	
216.5		4.9			4.9			4.4			4.4		216.5	
223.1		4.4			4.6			4.4			4.4		223.1	
229.7					4.6			4.4			4.4		229.7	
组合 combinati on	211110			211111			221111			222111			组合 combinati on	

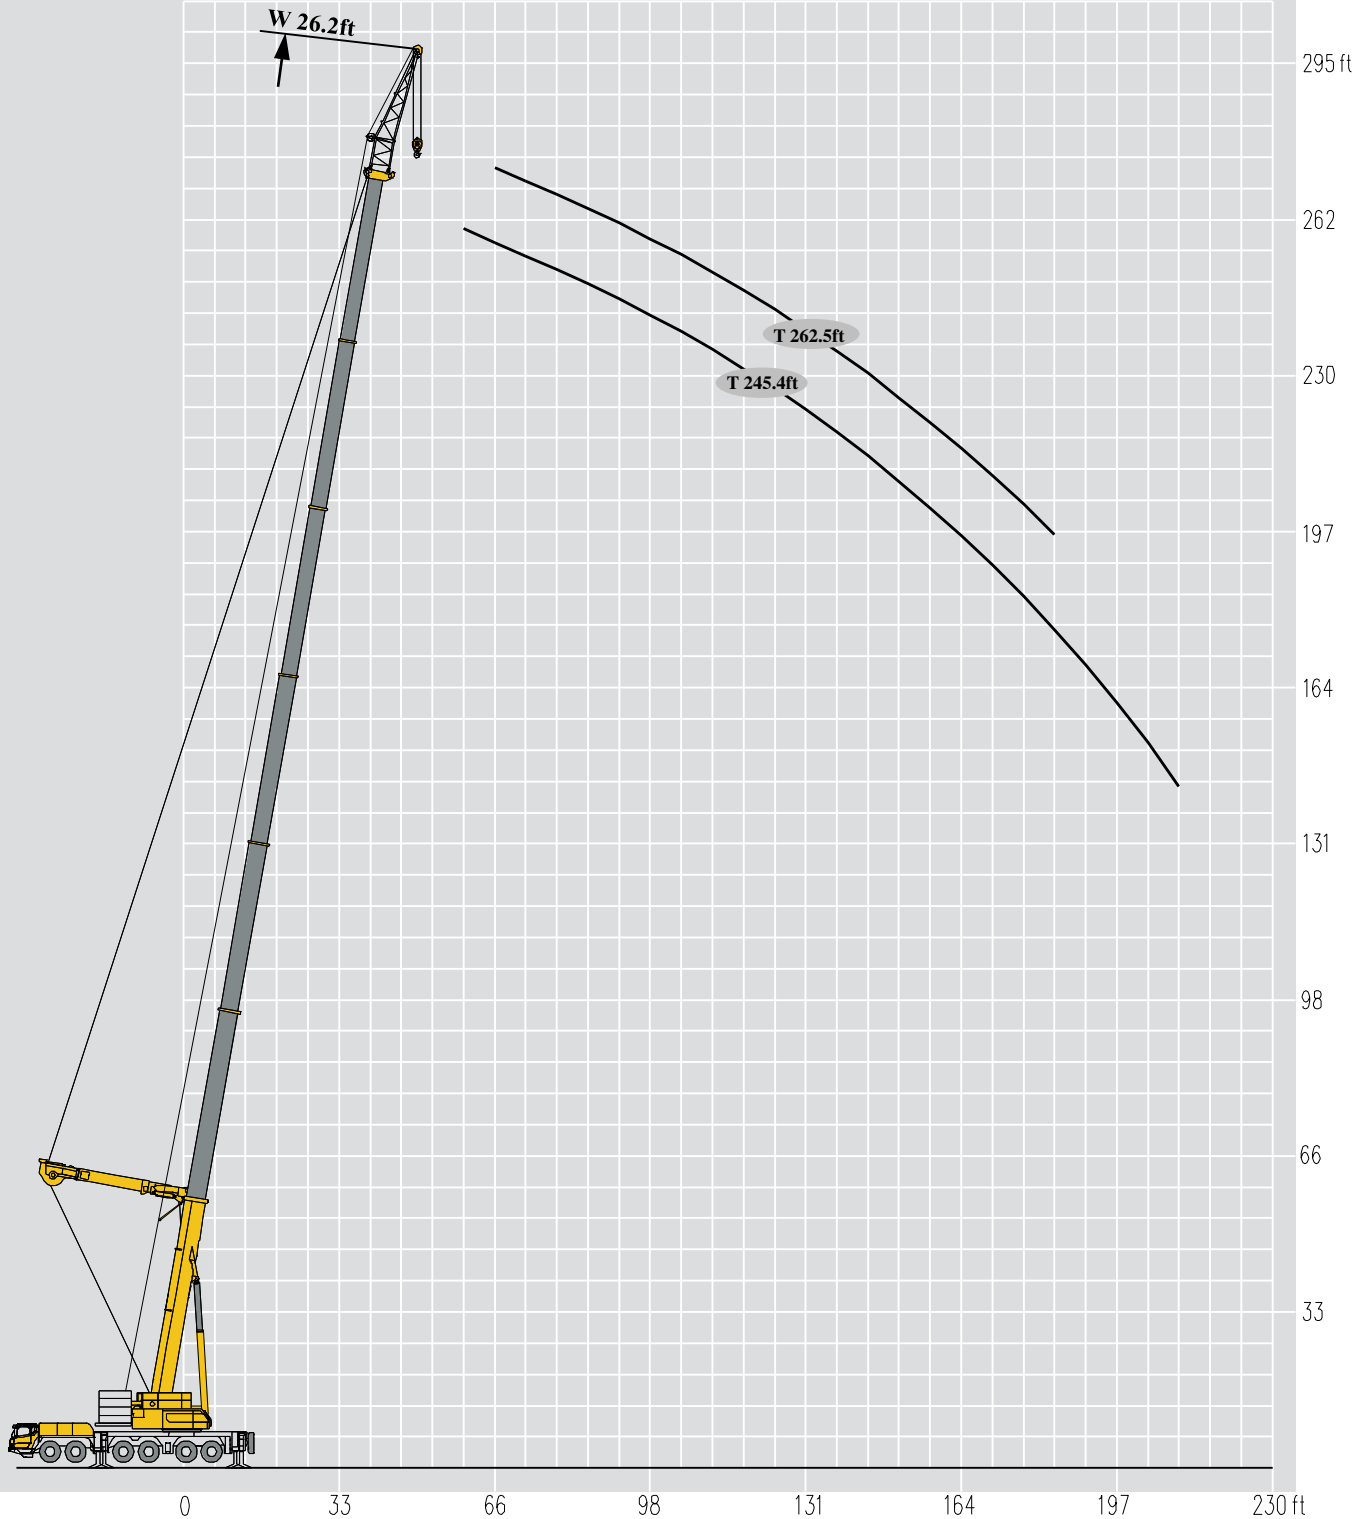
										
	212.6+7 ft			229.0+7 ft			245.4+7 ft			
	118.1 ft			118.1 ft			118.1 ft			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	
78.7	18.7			12.1						78.7
85.3	17.6			11.5			8.6			85.3
91.9	15.4			11.0			8.4			91.9
98.4	14.8			10.6			6.6			98.4
105.0	14.1			9.9			6.0			105.0
111.5	13.7			7.5			6.0			111.5
118.1	13.2	9.5		7.5	5.1		4.6			118.1
124.7	12.6	9.0		6.6	5.1		4.4			124.7
131.2	10.4	8.8		6.6	4.9		4.5			131.2
137.8	10.1	8.4		6.0	4.6					137.8
144.4	9.5	7.5	4.4	5.7	4.6					144.4
150.9	9.5	7.3	4.4	5.3	4.4					150.9
157.5	8.6	6.6	4.4	5.3						157.5
164.0	8.2	6.6	4.4	5.1						164.0
170.6	7.7	5.5	4.4	4.9						170.6
177.2	7.5	5.5	4.4	4.4						177.2
183.7	7.3	5.3		4.4						183.7
190.3	7.1	5.1		4.4						190.3
196.9	6.6	4.4		4.4						196.9
203.4	5.7	4.4								203.4
210.0	4.4	4.4								210.0
组合 combinati on	222211			222221			222222			组合 combinati on

起重性能表
Lifting capacities

T 147.3~245.4ft

	 															
	147.3+7 ft				163.7+7 ft				180.1+7 ft				196.2+7 ft			
	118.1 ft				118.1 ft				118.1 ft				118.1 ft			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°				
59.1	30.9												59.1			
65.6	27.3			25.6									65.6			
72.2	26.0			23.4			22.7			22.0			72.2			
78.7	24.3			23.4			21.6			21.2			78.7			
85.3	20.9			20.9			20.7			18.7			85.3			
91.9	19.8	12.6		19.8			18.3			17.6			91.9			
98.4	18.7	11.7		17.9	10.8		17.6			15.7			98.4			
105.0	17.6	11.0		17.0	10.8		16.8	10.8		15.7			105.0			
111.5	15.9	9.9		16.1	9.3		14.8	10.6		14.3	10.1		111.5			
118.1	15.0	9.9		14.6	9.0		14.8	10.6		13.9	9.9		118.1			
124.7	13.7	9.7		14.6	9.0		13.4	9.7		13.2	9.7		124.7			
131.2	13.4	8.6	4.9	13.0	8.2	4.9	12.8	9.3		12.3	9.0		131.2			
137.8	11.9	8.2	4.4	12.1	7.9	4.6	11.9	9.0	4.9	11.9	8.8	4.6	137.8			
144.4	10.1	8.2	4.4	11.5	7.5	4.6	10.4	8.8	4.9	11.0	8.4	4.6	144.4			
150.9	7.5	7.1	4.4	9.0	7.3	4.4	8.4	8.2	4.6	8.6	7.7	4.4	150.9			
157.5	5.3	6.8	4.4	6.8	6.6	4.4	6.2	7.7	4.4	6.4	7.3	4.4	157.5			
164.0	4.4	6.6	4.4	4.6	6.4	4.4	4.6	7.3	4.4	4.4	6.8	4.4	164.0			
170.6		6.2	4.4		6.2	4.4		6.4	4.4		6.4	4.4	170.6			
177.2		5.7	4.4		6.0	4.4		5.7	4.4		5.5	4.4	177.2			
183.7		4.4	4.4		4.9	4.4		5.3	4.4		5.1	4.4	183.7			
190.3			4.4		4.4	4.4		4.4	4.4		4.4	4.4	190.3			
196.9						4.4			4.4			4.4	196.9			
组合 combinati on	211110			211111			221111			222111			组合 combinati on			

										
	212.6+7 ft			229.0+7 ft			245.4+7 ft			
	118.1 ft			118.1 ft			118.1 ft			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	
78.7	18.7			12.1						78.7
85.3	17.6			11.5						85.3
91.9	15.4			11.0				8.6		91.9
98.4	14.8			10.6				8.4		98.4
105.0	14.1			9.9				6.6		105.0
111.5	13.7			9.9				6.0		111.5
118.1	13.2	9.5		7.5	5.1			6.0		118.1
124.7	12.6	8.8		7.5	5.1			4.6		118.1
131.2	10.1	8.6		6.6	5.1					124.7
137.8	9.9	8.2		6.6	4.9					131.2
144.4	9.0	8.2		6.0	4.6					137.8
150.9	9.0	7.1	4.4	5.7	4.4					144.4
157.5	9.0	6.6	4.4	5.3						150.9
164.0	7.1	6.2	4.4	5.1						157.5
170.6	4.9	5.7	4.4	4.6						164.0
177.2	4.4	5.1	4.4	4.4						170.6
183.7		5.1								177.2
190.3		4.4								183.7
190.3		4.4								190.3
组合 combinati on	222211			222221			222222			组合 combinati on



起重性能表
Lifting capacities

T 245.4~262.5ft



	 245.4-262.5ft	 SL	 26.2ft	 29.3ft × 28ft	 360°							
	220461 lb		176369 lb		132277 lb		88185 lb					
	245.4 ft	262.5 ft	245.4 ft	262.5 ft	245.4 ft	262.5 ft	245.4 ft	262.5 ft				
	26.2 ft	26.2 ft	26.2 ft	26.2 ft	26.2 ft	26.2 ft	26.2 ft	26.2 ft				
59.1	29.1		29.1		29.1		29.1		59.1			
65.6	28.2	22.0	28.2	22.0	28.2	22.0	28.2	22.0	65.6			
72.2	27.3	20.3	27.3	20.3	27.3	20.3	27.3	20.3	72.2			
78.7	25.4	19.4	25.4	19.4	25.4	19.4	25.4	19.4	78.7			
85.3	24.5	16.8	24.5	16.8	24.5	16.8	24.5	16.8	85.3			
91.9	24.0	15.9	24.0	15.9	24.0	15.9	24.0	15.9	91.9			
98.4	23.1	14.8	23.1	14.8	23.1	14.8	23.1	14.8	98.4			
105.0	21.8	13.7	21.8	13.7	21.8	13.7	21.8	13.7	105.0			
111.5	20.7	10.4	19.8	10.4	19.8	10.4	19.8	10.4	111.5			
118.1	20.5	10.4	19.2	10.4	19.2	10.4	16.8	10.4	118.1			
124.7	19.4	8.8	18.7	8.8	18.7	8.8	13.4	8.8	124.7			
131.2	18.7	8.8	17.6	8.8	17.6	8.8	10.6	8.8	131.2			
137.8	15.0	5.3	14.3	5.3	14.3	5.3	7.9	5.3	137.8			
144.4	15.0	5.3	14.3	5.3	13.2	5.3	5.5	5.3	144.4			
150.9	15.0	4.4	14.3	4.4	11.0	4.4	4.4	4.4	150.9			
157.5	12.8	4.4	12.1	4.4	8.8	4.4			157.5			
164.0	12.8	4.4	12.1	4.4	6.6	4.4			164.0			
170.6	11.7	4.4	11.0	4.4	4.6	4.4			170.6			
177.2	11.7	4.4	9.5	4.4	4.4				177.2			
183.7	10.6	4.4	7.7	4.4					183.7			
190.3	10.4		6.0						190.3			
196.9	8.6		4.4						196.9			
203.4	6.8								203.4			
210.0	5.3								210.0			
组合 combinati on	222222	333333	222222	333333	222222	333333	222222	333333	组合 combinati on			

符号标识

Description of symbols




常规标识

General symbols

	支腿 Outriggers		车桥 Axle
	工作幅度 Radius		行驶速度 Driving speed
	吊臂仰角 Boom angle		爬坡能力 Grade ability
	吊臂长度 Boom length		轮胎 Tires
	吊钩 Hook block		平衡重 Counterweight
	360°全回转 360° rotation		上车 Superstructure
	卷扬 Winch		底盘 Chassis

起重作业标识

Crane specific symbols

	主臂 Boom		固定副臂 Fixed jib
	超起 Super-lifting		风电臂 Wind power jib

注意事项
Notes

1. 表中额定总起重量值，是在平整的坚固地面上本起重机能够保证的最大总起重量，包括吊钩和吊具的重量，所以为了估算重物重量，必须减去上述的装置重量。吊重量单位为lb*1000。
2. 表中的工作幅度为起吊重物离地时起重物到起重机回转轴线的水平距离，是包括起重臂变形量在内的实际值，因而起吊前应考虑起重臂变形量。
3. 只允许在5级(风速46ft/s，风压0.018lbf/in²)风以下进行作业。
4. 吊重前操作者必须对物体的重量和工作范围了解后选择合适的作业工况，严禁超出表中的数值。幅度及臂长在相邻两个数值之间时，应依据两个数值中较小值确定起重作业。
5. 应按主臂仰角范围作业，即使是空载，也不应使主臂仰角处于范围外，谨防整机倾翻。
6. 表中的主臂长度应要按照每节臂的伸缩要求进行伸出。

1. The total rated loads given in the rated load charts are the maximum lifting capacity when the crane is set up on firm and level ground, which includes the weight of the hook block and slings. The weight of above-mentioned devices should be deducted to correctly calculate the load weight. Lifting load lb*1000.
2. The working radius shown in the rated load charts is the radius when the load is lifted off the ground, and it is the actual value including loaded boom deflection.
3. A lifting operation is permissible only when the wind force is below grade 5 (instantaneous wind speed is 46ft/s, wind pressure is 0.018lbf/in²).
4. Before beginning lifting operation, the operator should know the weight of the load to be lifted and its working range, and then select proper working conditions. Never operate the crane beyond the limit shown in the chart. Use the lower value from the chart when the boom length or working radius is between the range of values.
5. Observe the boom angle limit. Never operate the crane with the boom angle beyond the recommended limit even if a load is not being carried. Otherwise, the crane will tip.
6. The boom length given in the rated load charts should accord with the telescoping code of boom sections .



地址：中国江苏徐州市铜山路165号

Add：No.165 Tongshan Road Xuzhou Jiangsu China

电话(Tel)：0516-83462242/83462350

质量监督电话(Quality Inquiry Tel)：0516-87888268

备件电话(Spare Parts Tel)：0516-83461542

邮编(Post Code)：221004

网址(Web)：www.xcmg.com/qizhongji

服务热线 Service Tel

400-110-9999

400-001-5678



本印刷品不属于合同。出于产品不断改进的需要，我们保留对产品型号、参数、配置进行变更的权利，恕不另行通知。图片仅供参考，具体产品以实物为准。图片中产品可能并非标准配置，部分部件可能需要另行购置。办理牌照和上路行驶需遵守当地法规。

This print does not belong to the contract. We reserve the right to modify the design (such as product model, parameters and configuration) without notice for improvement. The pictures are just for reference. The product in the picture may not be standard configuration. Some parts need to be purchased separately. Conform to the local laws for license application and road traveling.