



WA7527-16KB/16D ETI

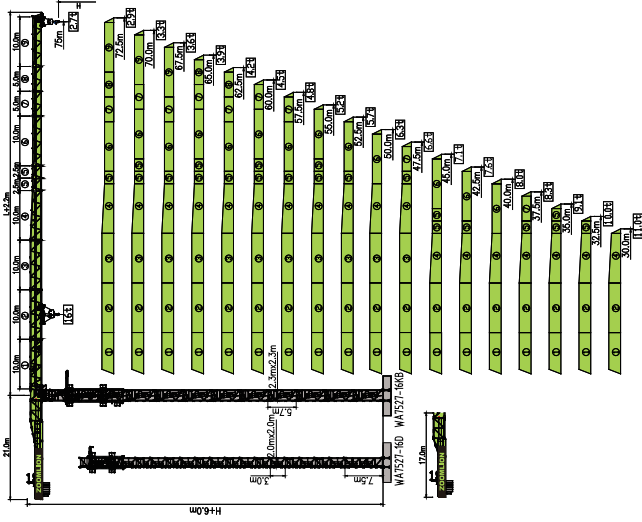

平均重量			3900 / 3000 / 2000kg		
			PHZ3900	PHZ3000M	PHZ2000H
75m	21m	21.5t	5	0	1
72.5m		20.6t	4	1	1
70m		20.6t	4	1	1
67.5m		19.5t	5	0	0
65m		20.6t	4	1	1
62.5m		19.5t	5	0	0
60m		19.5t	5	0	0
57.5m		18.6t	4	1	0
55m		18.6t	4	1	0
52.5m		17.6t	4	0	1
50m	17m	16.7t	3	1	1
47.5m		15.6t	4	0	0
45m		19.5t	5	0	0
42.5m		18.6t	4	1	0
40m		17.6t	4	0	1
37.5m		17.6t	4	0	1
35m		17.6t	4	0	1
32.5m		16.7t	3	1	1
30m		15.6t	4	0	0


■ 塔身 Masts / 反力 Reactions / WA7527-16KB



- 工作状态反力 Reactions in service
- 非工作状态反力 Reactions out of service
- 独立高度、最大起重臂的自重 (不含平衡重、吊重) Weight with max free-standing, max jib (without counter-weight and load)
- 2.3m x 2.3m x 2.85m 标准节选配
- 2.3m x 2.3m x 2.85m Tower section is optional configuration.


支腿固定式 Outrigger

■ 附着 Anchorages / WA7527-16KB

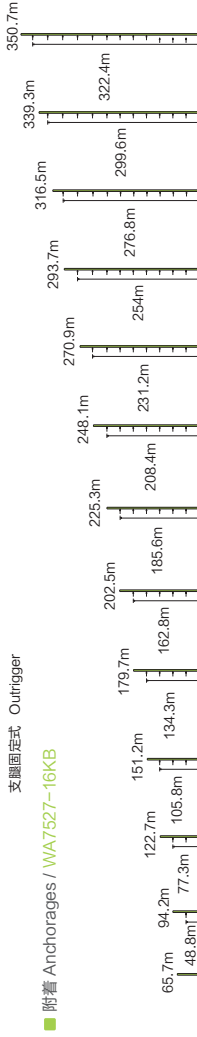


WA7527-16KB/16D ETI 平头塔式起重机 Flat-Top Tower Crane

■ 塔身 Masts / 反力 Reactions / WA7527-16D

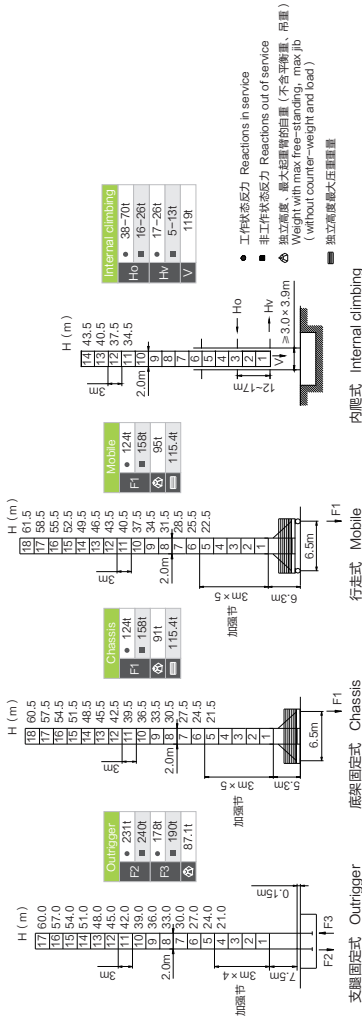

■ 附着 Anchorages / WA7527-16D

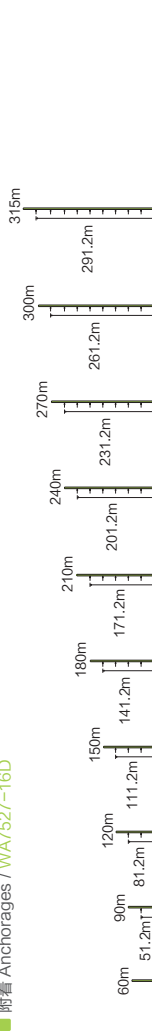

起重特性 Load Diagrams

	Max Capacity mt	15.0	20.0	25.0	30.0	32.5	35.0	37.5	40.0	42.5	45.0	47.5	50.0	52.5	55.0	57.5	60.0	62.5	65.0	67.5	70.0	72.5	75.0
75 (R=77.2)	52-31.3/8.0		8.0			7.7	7.0	6.5	6.0	5.6	5.2	4.9	4.6	4.3	4.1	3.8	3.6	3.4	3.3	3.1	3.0	2.8	2.7
	42-16.5/16.0	16.0	12.7	9.7	7.7	7.0	6.3	5.8	5.3	4.9	4.5	4.2	3.9	3.6	3.4	3.1	2.9	2.7	2.6	2.4	2.3	2.1	2.0
72.5 (R=74.7)	52-31.9/8.0		8.0			7.8	7.2	6.6	6.1	5.7	5.3	5.0	4.7	4.4	4.2	3.9	3.7	3.5	3.4	3.2	3.0	2.9	
	42-16.8/16.0	16.0	13.0	9.9	7.9	7.1	6.5	5.9	5.4	5.0	4.6	4.3	4.0	3.7	3.5	3.2	3.0	2.8	2.7	2.5	2.3	2.2	
70 (R=72.2)	52-33.9/8.0		8.0				7.7	7.1	6.6	6.1	5.7	5.4	5.0	4.8	4.5	4.2	4.0	3.8	3.6	3.5	3.3		
	42-17.8/16.0	16.0	14.0	10.7	8.5	7.7	7.0	6.4	5.9	5.4	5.0	4.7	4.3	4.1	3.8	3.5	3.3	3.1	2.9	2.8	2.6		
67.5 (R=69.7)	52-34.9/8.0		8.0					7.4	6.8	6.4	5.9	5.6	5.2	4.9	4.7	4.4	4.2	4.0	3.8	3.6			
	42-18.4/16.0	16.0	14.4	11.1	8.8	8.0	7.3	6.7	6.1	5.7	5.2	4.9	4.5	4.2	4.0	3.7	3.5	3.3	3.1	2.9			
65 (R=67.2)	52-35.8/8.0		8.0					7.6	7.0	6.5	6.1	5.7	5.4	5.1	4.8	4.5	4.3	4.1	3.9				
	42-18.8/16.0	16.0	14.9	11.4	9.1	8.2	7.5	6.9	6.3	5.8	5.4	5.0	4.7	4.4	4.1	3.8	3.6	3.4	3.2				
62.5 (R=64.7)	52-36.5/8.0		8.0					7.8	7.2	6.7	6.3	5.9	5.5	5.2	4.9	4.7	4.4	4.2					
	42-19.1/16.0	16.0	15.2	11.6	9.3	8.4	7.7	7.1	6.5	6.0	5.6	5.2	4.8	4.5	4.2	4.0	3.7	3.5					
60 (R=62.2)	52-37.0/8.0		8.0					7.9	7.3	6.8	6.4	6.0	5.6	5.3	5.0	4.7	4.5						
	42-19.4/16.0	16.0	15.4	11.8	9.5	8.6	7.8	7.2	6.6	6.1	5.7	5.3	4.9	4.6	4.3	4.0	3.8						
57.5 (R=59.7)	52-37.4/8.0		8.0						7.4	6.9	6.4	6.0	5.7	5.4	5.1	4.8							
	42-19.6/16.0	16.0	15.6	12.0	9.6	8.7	7.9	7.3	6.7	6.2	5.7	5.3	5.0	4.7	4.4	4.1							
55 (R=57.2)	52-38.2/8.0		8.0						7.6	7.1	6.6	6.2	5.8	5.5	5.2								
	42-20.0/16.0	16.0	12.3	9.9	8.9	8.1	7.5	6.9	6.4	5.9	5.5	5.1	4.8	4.5									
52.5 (R=54.7)	52-39.3/8.0		8.0						7.8	7.3	6.8	6.4	6.0	5.7									
	42-20.6/16.0	16.0	12.7	10.2	9.3	8.5	7.8	7.1	6.6	6.1	5.7	5.3	5.0	4.7	4.4	4.1							

WA7527-16KB/16D ET/

■ 起重特性 Load Diagrams

Model	Max Capacity mT	15.0	20.0	25.0	30.0	32.5	35.0	37.5	40.0	42.5	45.0	47.5	50.0
50 (R=52.2)	U	8.0											
	W	16.0		13.2	10.6	9.7	8.8	8.1	7.5	6.9	6.4	6.0	5.6
47.5 (R=49.7)	U	8.0											
	W	16.0		13.1	10.5	9.5	8.7	8.0	7.4	6.8	6.3	5.9	
45 (R=47.2)	U	8.0											
	W	16.0		13.2	10.6	9.6	8.8	8.1	7.4	6.9	6.4		
42.5 (R=44.7)	U	8.0											
	W	16.0		13.2	10.6	9.6	8.8	8.1	7.5	6.9			
40 (R=42.2)	U	8.0											
	W	16.0		13.5	10.8	9.8	9.0	8.2	7.6				
37.5 (R=39.7)	U	8.0											
	W	16.0		13.5	10.9	9.9	9.0	8.3					
35 (R=37.2)	U	8.0											
	W	16.0		13.6	11.0	10.0	9.1						
32.5 (R=34.7)	U	8.0											
	W	16.0		13.7	11.0	10.0							
30 (R=32.2)	U	8.0											
	W	16.0		13.7	11.0								

■ 传动机构 Mechanisms




配置 Configuration		b			bd			kW	
 起升 Hoisting	H55FL40-700A	m/min	90	36	45	18	55	700m	
		t	2.0	8.0	4.0	16.0			
 回转 Slewing	S75CA-130LB14/12A S75CA-130LB14/12A (M)	r/min	0-0.7				7.5kW × 2	▲超出咨询我们 Consult us if overtop	
 变幅 Trolleying	BP75A	m/min	0-80 m/min				7.5		
 行走 Travelling	ZAH52A-D × 2 ZDH52A-D × 2	m/min	0-25				5.2 kW × 4		
	380V(±10%)50Hz	77.5+5.2 × 4 (kW)							

WA7527-16KB/16D ETI 平头塔式起重机 Flat-Top Tower Crane

■ 运输单元 Packing list / 上装 Upper Parts / WA7527-16KB / WA7527-16D

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
1	平衡臂 前臂节 The front section of counter-jib		6.87	1.45	2.51	3.87	1
2	平衡臂 中臂节 The middle section of counter-jib		4.20	1.58	0.63	1.01	1
3	平衡臂后臂节 (包括平衡块, 不含钢丝绳) The rear section of counter-jib (Including counter weight and excluding cables)		11.91	1.68	2.02	8.45	1
4	臂节 I (含变幅机构) (Include Trolley Mechanism)		10.35	1.49	2.54	4.5	1
5	臂节 II Jib II		10.31	1.49	2.42	2.78	1
6	臂节 III Jib III		10.27	1.49	2.40	2.11	1
7	臂节 IV Jib IV		10.22	1.49	2.36	1.75	1
8	臂节 V Jib V		2.71	1.49	1.92	0.42	2
9	臂节 VI Jib VI		10.20	1.49	1.91	1.14	1
10	臂节 VII Jib VII		5.19	1.49	1.87	0.48	1
11	臂节 VIII Jib VIII		5.20	1.49	1.88	0.37	1
12	臂节 IX Jib IX		10.16	1.49	1.86	0.63	1
13	臂尖节 Jib end		1.01	1.74	2.26	0.15	1
14	载重小车 Trolley		2.17 2.05	1.71 1.71	0.93 0.93	0.33 0.30	1 1
15	吊钩 Hook		1.60	2.34	0.35	0.60	1
16	司机室 Cabin		2.10	1.30	2.25	0.70	1

■ 运输单元 Packing list / 下装 Bottom Parts / WA7527-16KB / WA7527-16D

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
1	回转总成 Slewing assembly		5.10	2.90	3.20	9.50	1
2	过渡节 Transition section		2.90	2.90	3.98	2.70	1
3	爬升架 Climbing equipment		11.73	3.07	2.87	6.15	1
4	基础节 主弦杆 Base Tower Section Main Chord		5.95	0.32	0.32	0.66	4
5	加强节 主弦杆 Reinforced Tower Section Main Chord		5.95	0.32	0.32	0.65	4x2
6	标准节 主弦杆 Tower Section Main Chord		5.95	0.32	0.32	0.51	4 x 8
1	回转总成 Slewing assembly		5.10	2.90	3.20	9.50	1
2	过渡节 Transition section		2.67	2.67	2.46	1.77	1
3	爬升架 Climbing equipment		7.23	2.600	2.80	3.02	1
4	基础节 Base Tower Section		7.85	2.10	2.15	5.00	1
5	加强节 Strengthen Sheet Section		3.50	2.12	0.70	0.50	4x1
6	加强节 Strengthen Sheet Section		3.50	2.12	0.70	0.53	4x3
7	标准节片 Sheet Section		3.50	2.12	0.70	0.45	4x13