



WA7527-20KB/20D ETI

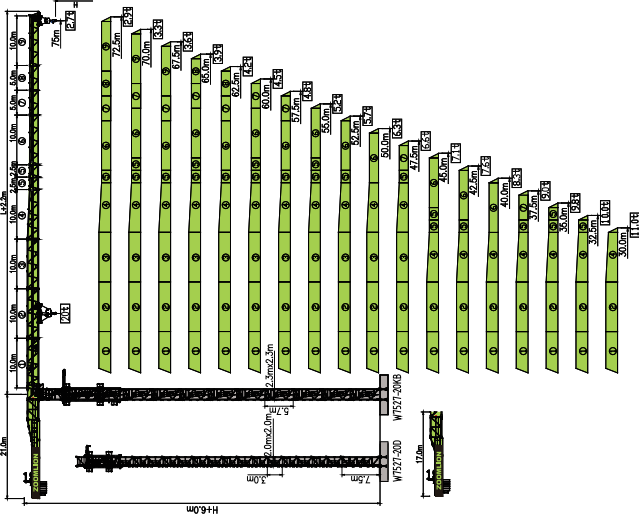

平衡重			3900 / 3000 / 2000kg		
			PHZ3900	PHZ3000M	PHZ2000H
	21m	75m	4	1	1
		72.5m	5	0	0
		70m	5	0	0
		67.5m	4	1	0
		65m	5	0	0
		62.5m	4	1	0
		60m	4	1	0
		57.5m	4	0	1
		55m	4	0	1
		52.5m	3	1	1
	17m	50m	4	0	0
		47.5m	3	1	0
		45m	5	0	0
		42.5m	4	1	0
		40m	4	0	1
		37.5m	3	1	1
		35m	3	1	1
	32.5m	4	0	0	
	30m	3	1	0	

■ 塔身 Masts / 反力 Reactions / WA7527-20KB




Outrigger	
F2	● 217t
F3	■ 263t
	■ 157t
	■ 212t
	■ 94.0t

- 工作状态反力 Reactions in service
- 非工作状态反力 Reactions out of service
- ⚙ 独立高度、最大起重臂的自重 (不含平衡重、吊重)
Weight with max free-standing, max jib
(without counter-weight and load)
- ※ 2.3m x 2.3m x 2.85m 标准节选配
2.3m x 2.3m x 2.85m Tower section is optional configuration.

支腿固定式 Outrigger

■ 附着 Anchorages / WA7527-20KB

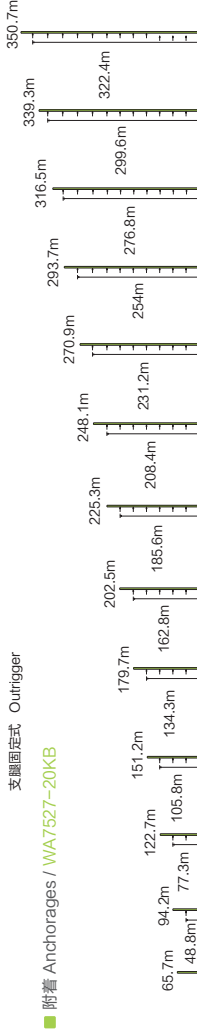

WA7527-20KB/20D ETI 平头塔式起重机 Flat-Top Tower Crane

■ 塔身 Masts / 反力 Reactions / WA7527-20D

H (m)

17 60.0

16 57.0

15 54.0

14 51.0

13 48.0

12 45.0

11 42.0

10 39.0

9 36.0

8 33.0

7 30.0

6 27.0

5 24.0

4 21.0

3 18.0

2 15.0

1 12.0

0 9.0

60m 51.2m

90m 81.2m

120m 111.2m

150m 141.2m

180m 171.2m

210m 201.2m

240m 231.2m

270m 261.2m

300m 291.2m

315m

H (m)

18 60.5

17 57.5

16 54.5

15 51.5

14 48.5

13 45.5

12 42.5

11 39.5

10 36.5

9 33.5

8 30.5

7 27.5

6 24.5

5 21.5

4 18.5

3 15.5

2 12.5

1 9.5

0 6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

6.5m

H (m)

18 61.5

17 58.5

16 55.5

15 52.5

14 49.5

13 46.5

12 43.5

11 40.5

10 37.5

9 34.5

8 31.5

7 28.5

6 25.5

5 22.5

4 19.5

3 16.5

2 13.5

1 10.5

0 7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

7.5m

H (m)

14 43.5

13 40.5

12 37.5

11 34.5

10 31.5

9 28.5

8 25.5

7 22.5

6 19.5

5 16.5

4 13.5

3 10.5

2 7.5

1 4.5

0 1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

H (m)

14 43.5

13 40.5

12 37.5

11 34.5

10 31.5

9 28.5

8 25.5

7 22.5

6 19.5

5 16.5

4 13.5

3 10.5

2 7.5

1 4.5

0 1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

H (m)

14 43.5

13 40.5

12 37.5

11 34.5

10 31.5

9 28.5

8 25.5

7 22.5

6 19.5

5 16.5

4 13.5

3 10.5

2 7.5

1 4.5

0 1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

H (m)

14 43.5

13 40.5

12 37.5

11 34.5

10 31.5

9 28.5

8 25.5

7 22.5

6 19.5

5 16.5

4 13.5

3 10.5

2 7.5

1 4.5

0 1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

1.5m

H (m)

14 43.5

13 40.5

12 37.5

11 34.5

10 31.5

9 28.5

8 25.5

7 22.5

6 19.5

5 16.5

4 13.5

3 10.5

2 7.5

1 4.5

0 1.5m

1.5m

1.5m

WA7527-20KB/20D ETI

平头塔式起重机
Flat-Top Tower Crane

起重特性 Load Diagrams

ETI	Max Capacity mT	15.0	20.0	25.0	30.0	32.5	35.0	37.5	40.0	42.5	45.0	47.5	50.0
50 (R=52.2)	⌋ 5.2-33.5/10.0			10.0			9.5	8.8	8.2	7.6	7.1	6.7	6.3
	⌋ 4.2-17.6/20.0	20.0	17.2	13.2	10.6	9.7	8.8	8.1	7.5	6.9	6.4	6.0	5.6
47.5 (R=49.7)	⌋ 5.2-33.1/10.0			10.0			9.4	8.7	8.1	7.5	7.0	6.6	
	⌋ 4.2-17.4/20.0	20.0	17.0	13.1	10.5	9.5	8.7	8.0	7.4	6.8	6.3	5.9	
45 (R=47.2)	⌋ 5.2-33.5/10.0			10.0			9.5	8.8	8.1	7.6	7.1		
	⌋ 4.2-17.6/20.0	20.0	17.2	13.2	10.6	9.6	8.8	8.1	7.4	6.9	6.4		
42.5 (R=44.7)	⌋ 5.2-33.8/10.0			10.0			9.5	8.8	8.2	7.6			
	⌋ 4.2-17.8/20.0	20.0	17.2	13.2	10.6	9.6	8.8	8.1	7.5	6.9			
40 (R=42.2)	⌋ 5.2-34.0/10.0			10.0			9.7	8.9	8.3				
	⌋ 4.2-17.8/20.0	20.0	17.5	13.5	10.8	9.8	9.0	8.2	7.6				
37.5 (R=39.7)	⌋ 5.2-34.2/10.0			10.0			9.7	9.0					
	⌋ 4.2-17.9/20.0	20.0	17.6	13.5	10.9	9.9	9.0	8.3					
35 (R=37.2)	⌋ 5.2-34.4/10.0			10.0			9.8						
	⌋ 4.2-18.0/20.0	20.0	17.7	13.6	11.0	10.0	9.1						
32.5 (R=34.7)	⌋ 5.2-32.5/10.0			10.0									
	⌋ 4.2-18.1/20.0	20.0	17.8	13.7	11.0	10.0							
30 (R=32.2)	⌋ 5.2-30.0/10.0		10.0										
	⌋ 4.2-18.1/20.0	20.0	17.8	13.7	11.0								

■ 传动机构 Mechanisms


配置 Configuration		b			bd		kW	
 起升 Hoisting	H75FL50-880A	m/min	95	38	47.5	19		
		t	2.5	10.0	5.0	20.0	75	880m
 回转 Slewing	S75CA-130LB14/12A S75CA-130LB14/12A (M)	r/min	0 ~ 0.7				7.5kW × 2	▲超出咨询我们 Consult us if overtop
 变幅 Trolleying	BP75A	m/min	0 ~ 80 m/min				7.5	
 行走 Travelling	ZAH52A-D × 2 ZDH52A-D × 2	m/min	0 ~ 25				5.2 kW × 4	
	380V(± 10 %)50Hz		97.5+5.2 × 4 (kW)					

WA7527-20KB/20D ETI 平头塔式起重机 Flat-Top Tower Crane

■ 运输单元 Packing list / 上装 Upper Parts / WA7527-20KB / WA7527-20D

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
1	平衡臂 前臂节 The front section of counter-jib		6.87	1.45	2.51	3.87	1
2	平衡臂 中臂节 The middle section of counter-jib		4.20	1.58	0.63	1.01	1
3	平衡臂后臂节 (包括平衡臂, 不含平衡钩) The rear section of counter-jib (Including balance arm and balance hook)		11.91	1.68	2.02	9.80	1
4	臂节 I (含变幅机构) (Include Trolley Mechanism)		10.35	1.49	2.54	4.5	1
5	臂节 II Jib II		10.31	1.49	2.42	2.78	1
6	臂节 III Jib III		10.27	1.49	2.40	2.11	1
7	臂节 IV Jib IV		10.22	1.49	2.36	1.75	1
8	臂节 V Jib V		2.71	1.49	1.92	0.42	2
9	臂节 VI Jib VI		10.20	1.49	1.91	1.14	1
10	臂节 VII Jib VII		5.19	1.49	1.87	0.48	1
11	臂节 VIII Jib VIII		5.20	1.49	1.88	0.37	1
12	臂节 IX Jib IX		10.16	1.49	1.86	0.63	1
13	臂尖节 Jib end		1.01	1.74	2.26	0.15	1
14	载重小车 Trolley		2.17 2.05	1.71 1.71	0.93 0.93	0.33 0.30	1 1
15	吊钩 Hook		1.60	2.34	0.35	0.60	1
16	司机室 Cabin		2.10	1.30	2.25	0.70	1

■ 运输单元 Packing list / 下装 Bottom Parts / WA7527-20KB / WA7527-20D

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
1	回转总成 Slewing assembly		5.10	2.90	3.20	9.90	1
2	过渡节 Transition section		2.90	2.90	3.98	2.70	1
3	爬升架 Climbing equipment		11.73	3.07	2.87	6.15	1
4	基础节 Base Tower Section Main Chord		5.95	0.32	0.32	0.66	4
5	加强节 Reinforced Tower Section Main Chord		5.95	0.32	0.32	0.65	4x2
6	标准节 Tower Section Main Chord		5.95	0.32	0.32	0.51	4 x 8
5	加强节 Strengthen Sheet Section		3.50	2.12	0.70	0.50	4x1
6	加强节 Strengthen Sheet Section		3.50	2.12	0.70	0.53	4x3
7	标准节片 Sheet Section		3.50	2.12	0.70	0.45	4x13