


永茂建机
YONGMAO

STL1460C
64t

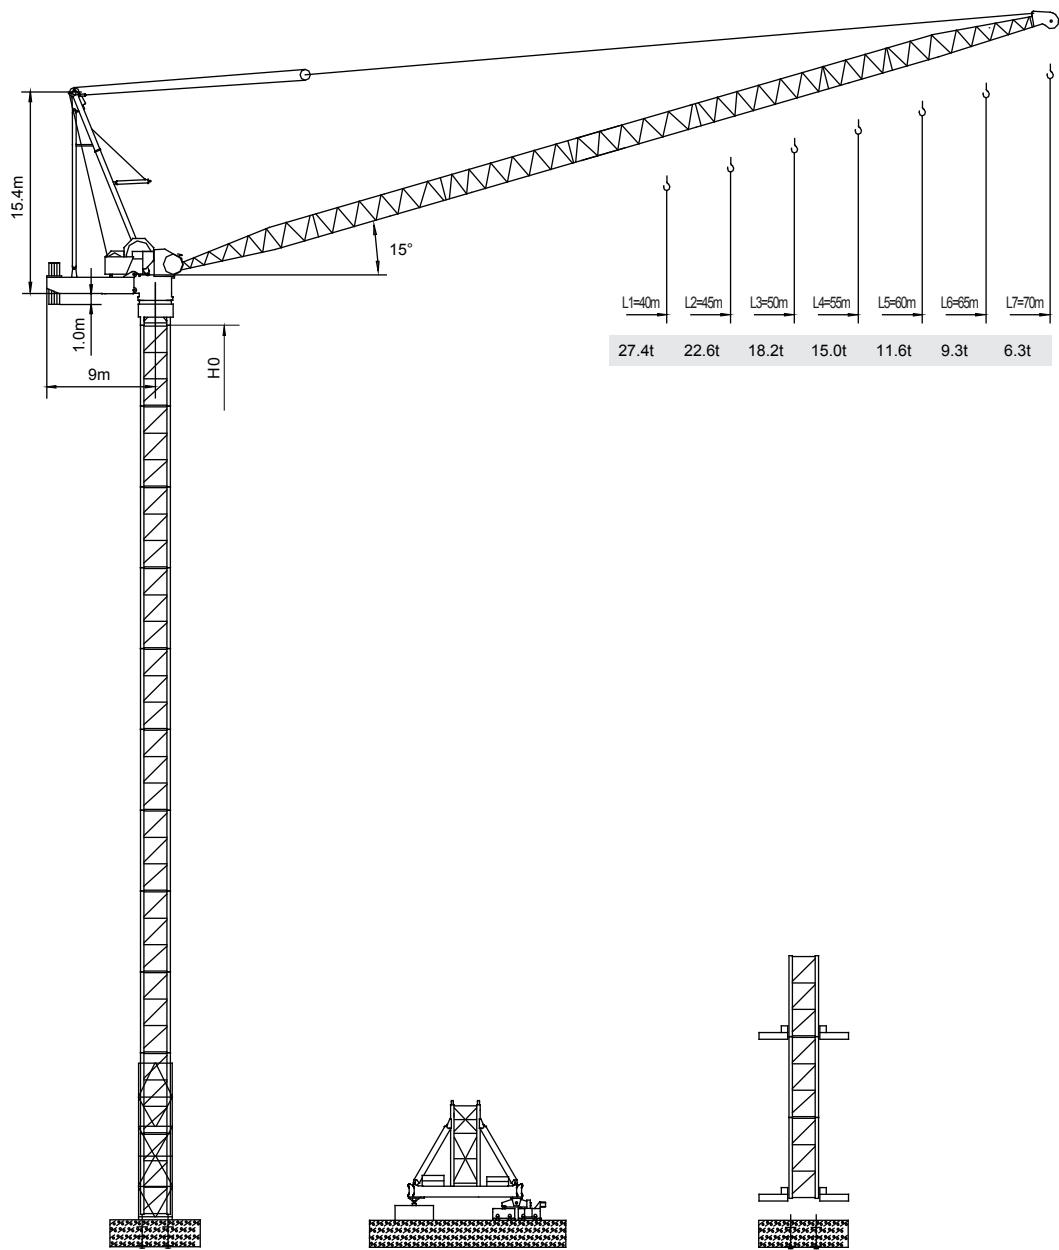

CE FEM

Luffing

V 5.0-09112014

動臂系列

1 1
5 5
3 4

Luffing STL1460C

Luffing STL1460C


STL1460C
64t

載荷表 Load Chart

64t

STW-64-A(B)-1-V1.0


R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	15	20	25	30	35	40	45	50	55	60	65	70
70	↓	7.31~29.8	32.0	32.0	32.0	32.0	31.7	25.4	20.6	16.9	13.9	11.5	9.5	7.8	6.3
65	↓	6.85~33.0	32.0	32.0	32.0	32.0	32.0	29.4	23.9	19.7	16.3	13.6	11.3	9.3	
	↘	6.85~23.7	50.0	50.0	50.0	46.8	36.6	29.4	23.9	19.7	16.3	13.6	11.3	9.3	
60	↓	6.42~33.3	32.0	32.0	32.0	32.0	32.0	29.6	24.2	20.0	16.6	13.9	11.6		
	↘	6.42~19.5	64.0	64.0	62.1	46.9	36.8	29.6	24.2	20.0	16.6	13.9	11.6		
55	↓	5.96~34.1	32.0	32.0	32.0	32.0	32.0	30.9	25.4	21.2	17.8	15.0			
	↘	5.96~19.9	64.0	64.0	63.6	48.3	38.2	30.9	25.4	21.2	17.8	15.0			
50	↓	5.52~34.4	32.0	32.0	32.0	32.0	32.0	31.3	25.8	21.6	18.2				
	↘	5.52~20.0	64.0	64.0	63.9	48.7	38.5	31.3	25.8	21.6	18.2				
45	↓	5.06~35.5	32.0	32.0	32.0	32.0	32.0	32.0	27.0	22.6					
	↘	5.06~20.6	64.0	64.0	64.0	50.5	40.0	32.6	27.0	22.6					
40	↓	4.63~35.8	32.0	32.0	32.0	32.0	32.0	32.0	27.4						
	↘	4.63~20.8	64.0	64.0	64.0	51.2	40.6	33.1	27.4						



64t

STW-64-A(B)-3-V1.0

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	15	20	25	30	35	40	45	50	55	60	65	70
70	↓	7.31~26.76	32.00	32.00	32.00	32.00	27.16	21.46	17.18	13.85	11.18	9.00	7.19	5.65	4.33
65	↓	6.85~30.23	32.00	32.00	32.00	32.00	32.00	25.71	20.74	16.86	13.77	11.23	9.12	7.33	
	↘	6.85~21.74	50.00	50.00	50.00	41.64	32.35	25.71	20.74	16.86	13.77	11.23	9.12	7.33	
60	↓	6.42~30.72	32.00	32.00	32.00	32.00	32.00	26.25	21.26	17.39	14.28	11.75	9.63		
	↘	6.42~17.98	64.00	64.00	56.16	42.20	32.89	26.25	21.26	17.39	14.28	11.75	9.63		
55	↓	5.96~31.70	32.00	32.00	32.00	32.00	32.00	27.78	22.71	18.77	15.61	13.03			
	↘	5.96~18.49	64.00	64.00	58.21	44.01	34.54	27.78	22.71	18.77	15.61	13.03			
50	↓	5.52~32.19	32.00	32.00	32.00	32.00	32.00	28.44	23.35	19.39	16.23				
	↘	5.52~18.68	64.00	64.00	58.97	44.72	35.22	28.44	23.35	19.39	16.23				
45	↓	5.06~33.51	32.00	32.00	32.00	32.00	32.00	30.00	24.72	20.61					
	↘	5.06~19.40	64.00	64.00	61.71	46.91	37.05	30.00	24.72	20.61					
40	↓	4.63~34.02	32.00	32.00	32.00	32.00	32.00	30.76	25.38						
	↘	4.63~19.75	64.00	64.00	63.03	47.97	37.93	30.76	25.38						




R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	42.7	47.7	52.7	57.7	62.7	67.7	72.7
72.7	↓	8.09~51.7	10.00	10.00	10.00	9.53	7.63	6.03	4.66	3.48
67.7	↓	7.63~56.7	10.00	10.00	10.00	10.00	9.63	7.77	6.18	
62.7	↓	7.19~58.7	10.00	10.00	10.00	10.00	10.00	8.27		
57.7	↓	6.73~57.7	10.00	10.00	10.00	10.00	10.00			
52.7	↓	6.30~52.7	10.00	10.00	10.00	10.00				
47.7	↓	5.84~52.7	10.00	10.00	10.00					
42.7	↓	5.40~42.7	10.00	10.00						

Luffing STL1460C



YONGMAO HOLDINGS LIMITED


STL1460C



塔身節 Mast	臂長 Jib length	H1 (m)	A1 (m)	P (t)	R (t)
H260F2	L1-7	61	18	330	145
		X (m)	Y (m)	L (m)	W (m)
		4.32	3.4	4.33	3.88

1	1
5	5
5	6

Luffing STL1460C

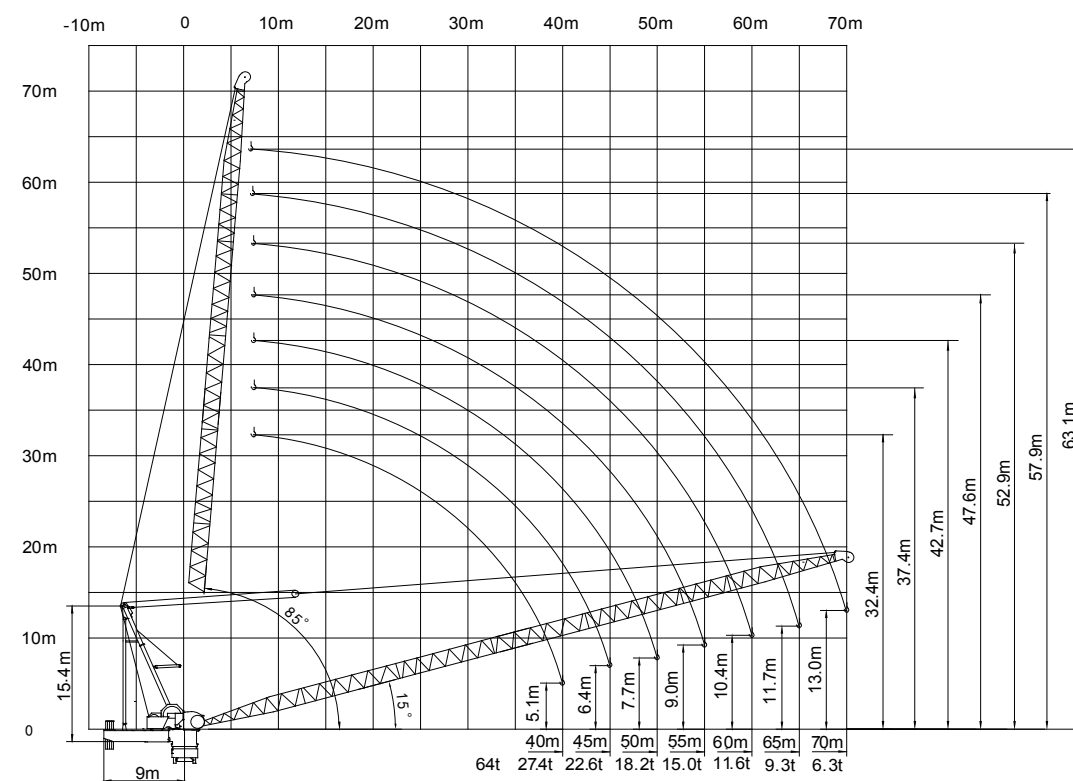

機構 Mechanism								功率 Power
			m/min	t	m/min	t		
		4160LYS320	0 - 117	32	0-58.5	64	800 m >800 m*	360 kW (480hp)
		1160LYS100B	0 - 54	10	—	—	657 m	
			0 - 123	1				
	2107DYS220		15°—85° 3min					
	263RYS		0—0.73 rpm					
	RTV		0—15 m/min				4X7.5 KW	

 供電容量 Power supply	kVA
380V (± 10 %) 50Hz	40

本技術參數不受法律約束，技術資訊請詳見相應說明書。
These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

永茂控

YONGMAO HOLDINGS LIMITED

永茂控股

YONGMAO HOLDINGS LIMITED