


永茂建机
YONGMAO

ST8000
200t

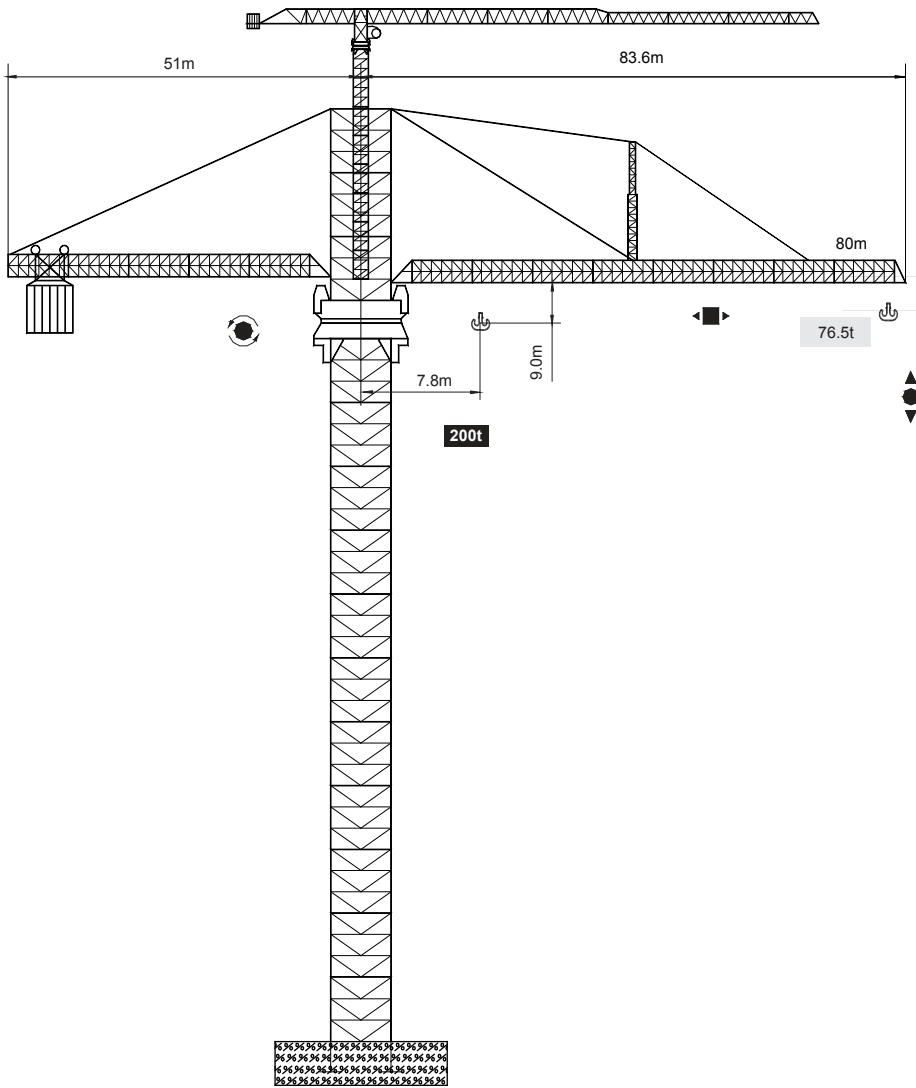

FEM

Topkit

V 5.0-09112014

塔帽系列

0 0
5 6
9 0

Topkit ST8000


Topkit ST8000

ST8000
200t

載荷表 Load Chart

ST1-200-A(B)-1-V1.0

R	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	35	40	50	55	60	65	70	75	80
80	UU	40.0	200.0	200.0	200.0	200.0	144.1	125.6	110.9	98.8	88.8	80.3	73.0
	U	66.2	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	92.3	83.8	76.5
70	UU	40.0	200.0	200.0	200.0	200.0	144.1	125.6	110.9	98.8	88.8		
	U	66.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	92.3		
60	UU	40.0	200.0	200.0	200.0	200.0	144.2	125.7	111.0				
	U	60.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0				
50	UU	40.0	200.0	200.0	200.0	200.0	144.5						
	U	50.0	100.0	100.0	100.0	100.0	100.0						
40	UU	40.0	200.0	200.0	200.0	200.0	200.0						
	U	40.0	100.0	100.0	100.0	100.0	100.0						

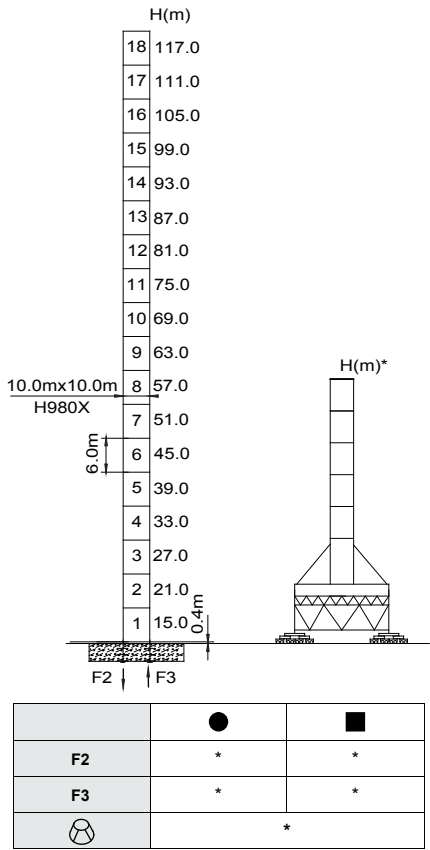

● 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
⊗ 整機自由高度重量 (不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

Topkit ST8000



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED

ST8000
200t

主要性能參數 Specifications

機構 Mechanism						
		m/min	t	m/min	t	
	LYS	30 70 110	100 50 10	15 38 55	200 100 20	621m >621m *
	DYS	0—20 m/min				
	RYS	0—0.3 rpm				
	RT	*				

 供電容量 Power supply	kVA
---	---

* 與製造商聯繫 Contact us, please.
☆ 标准配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。
These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

塔帽系列

0 0
6 6
1 2

Topkit ST8000
Topkit ST8000



YONGMAO HOLDINGS LIMITED