


永茂建机
YONGMAO

STT1330
64/50t

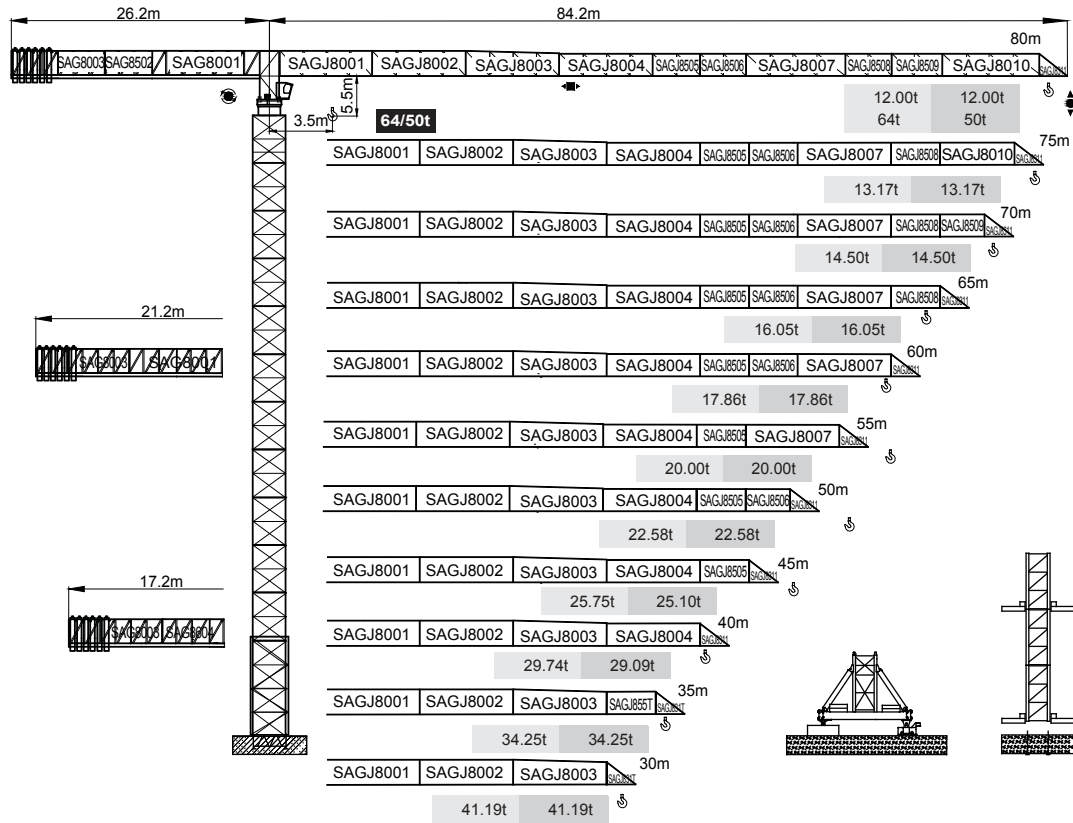

CE FEM

Topless

V 5.4-01242017

平頭系列

003
004

Topless STT1330

Topless STT1330

STT1330
64/50t

載荷表 Load Chart

64t

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	20	25	30	35	40	45	50	55	60	65	70	75	80
80	L	37.64	32.00	32.00	32.00	32.00	32.00	29.74	25.75	22.58	20.00	17.86	16.05	14.50	13.17	12.00
		20.57	64.00	64.00	51.04	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	11.35
75	L	37.64	32.00	32.00	32.00	32.00	32.00	29.74	25.75	22.58	20.00	17.86	16.05	14.50	13.17	
		20.57	64.00	64.00	51.04	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
70	L	37.64	32.00	32.00	32.00	32.00	32.00	29.74	25.75	22.58	20.00	17.86	16.05	14.50	13.17	
		20.57	64.00	64.00	51.04	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
65	L	37.64	32.00	32.00	32.00	32.00	32.00	29.74	25.75	22.58	20.00	17.86	16.05	14.50	13.17	
		20.57	64.00	64.00	51.04	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
60	L	37.64	32.00	32.00	32.00	32.00	32.00	29.74	25.75	22.58	20.00	17.86	16.05	14.50	13.17	
		20.57	64.00	64.00	51.04	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
55	L	37.64	32.00	32.00	32.00	32.00	32.00	29.74	25.75	22.58	20.00	17.86	16.05	14.50	13.17	
		20.57	64.00	64.00	51.04	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
50	L	37.64	32.00	32.00	32.00	32.00	32.00	29.74	25.75	22.58	20.00	17.86	16.05	14.50	13.17	
		20.57	64.00	64.00	51.04	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
45	L	37.64	32.00	32.00	32.00	32.00	32.00	29.74	25.75	22.58	20.00	17.86	16.05	14.50	13.17	
		20.57	64.00	64.00	51.04	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
40	L	37.64	32.00	32.00	32.00	32.00	32.00	29.74	25.75	22.58	20.00	17.86	16.05	14.50	13.17	
		20.57	64.00	64.00	51.04	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
35	L	35.00	32.00	32.00	32.00	32.00	32.00	29.74	25.75	22.58	20.00	17.86	16.05	14.50	13.17	
		20.57	64.00	64.00	51.04	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
30	L	30.00	32.00	32.00	32.00	32.00	32.00	29.74	25.75	22.58	20.00	17.86	16.05	14.50	13.17	
		20.57	64.00	64.00	51.04	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	

50t

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	20	25	30	35	40	45	50	55	60	65	70	75	80
80	L	46.09	25.00	25.00	25.00	25.00	25.00	25.00	25.00	22.58	20.00	17.86	16.05	14.50	13.17	12.00
		25.45	50.00	50.00	50.00	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	11.35
75	L	46.09	25.00	25.00	25.00	25.00	25.00	25.00	25.00	22.58	20.00	17.86	16.05	14.50	13.17	
		25.45	50.00	50.00	50.00	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
70	L	46.09	25.00	25.00	25.00	25.00	25.00	25.00	25.00	22.58	20.00	17.86	16.05	14.50	13.17	
		25.45	50.00	50.00	50.00	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
65	L	46.09	25.00	25.00	25.00	25.00	25.00	25.00	25.00	22.58	20.00	17.86	16.05	14.50	13.17	
		25.45	50.00	50.00	50.00	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
60	L	46.09	25.00	25.00	25.00	25.00	25.00	25.00	25.00	22.58	20.00	17.86	16.05	14.50	13.17	
		25.45	50.00	50.00	50.00	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
55	L	46.09	25.00	25.00	25.00	25.00	25.00	25.00	25.00	22.58	20.00	17.86	16.05	14.50	13.17	
		25.45	50.00	50.00	50.00	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
50	L	46.09	25.00	25.00	25.00	25.00	25.00	25.00	25.00	22.58	20.00	17.86	16.05	14.50	13.17	
		25.45	50.00	50.00	50.00	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
45	L	45.00	25.00	25.00	25.00	25.00	25.00	25.00	25.00	22.58	20.00	17.86	16.05	14.50	13.17	
		25.45	50.00	50.00	50.00	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
40	L	40.00	25.00	25.00	25.00	25.00	25.00	25.00	25.00	22.58	20.00	17.86	16.05	14.50	13.17	
		25.45	50.00	50.00	50.00	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
35	L	35.00	25.00	25.00	25.00	25.00	25.00	25.00	25.00	22.58	20.00	17.86	16.05	14.50	13.17	
		25.45	50.00	50.00	50.00	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	
30	L	30.00	25.00	25.00	25.00	25.00	25.00	25.00	25.00	22.58	20.00	17.86	16.05	14.50	13.17	
		25.45	50.00	50.00	50.00	41.19	34.25	29.09	25.10	21.93	19.35	17.21	15.40	13.86	12.52	

Topless STT1330




YONGMAO HOLDINGS LIMITED




YONGMAO HOLDINGS LIMITED

STT1330
64/50t

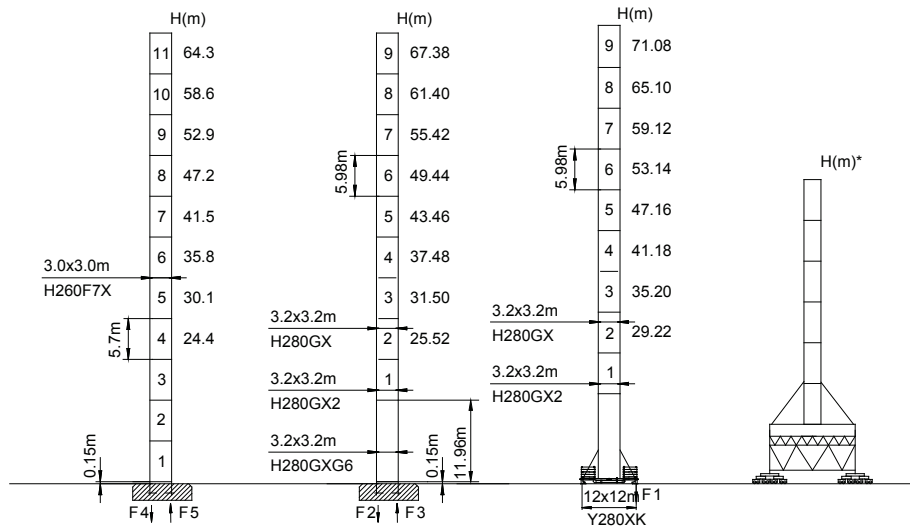

	●	■
F2	506t	325t
F3	281t	113t
⊗	355t	

- 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
- ⊗ 整機自由高度重量 (不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

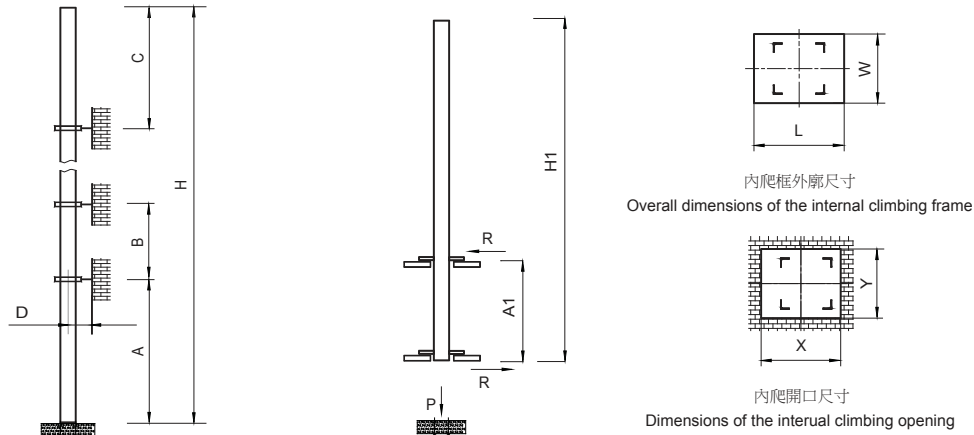

塔身節 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
H280GX	48	36	48	>5.0	160 >160 *
H280GX1	48	36	48	>5.0	160 >160 *

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
H280GX	*	*	*	*	*	*	*	*
H280GX1	*	*	*	*	*	*	*	*

附著道數 Number of tie collars =(H-A-C)/B+1

超過100m高度，需降低載荷，請與公司聯繫。

Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.

STT1330
64/50t

主要性能參數 Specifications

機構 Mechanism								電動機 Motor kW
			m/min	t	m/min	t		
	64t	200LFV160DBA	0－36	32.0	0－18	64.0	1100m > 1100m*	166
			0－50	20.0	0－25	40.0		
			0－72	12.0	0－36	24.0		
	50t	160LFV125DB	0－32	25.0	0－16	50.0	900m > 900m*	160
			0－38	20.0	0－19	40.0		
			0－64	8.0	0－32	16.0		
	24DFV33		0－25 m/min				24	
	15RFCV		0－0.4 rpm				2x15	
	RT		*				*	

電壓 Voltage	kVA	
380V (±10%) 50Hz	160LFV125DB : 270	200LFV160DBA : 320

- * 與製造商聯繫 Contact us, please.
- ☆ 标准配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。
These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED