


永茂建机
YONGMAO

STT153
8t

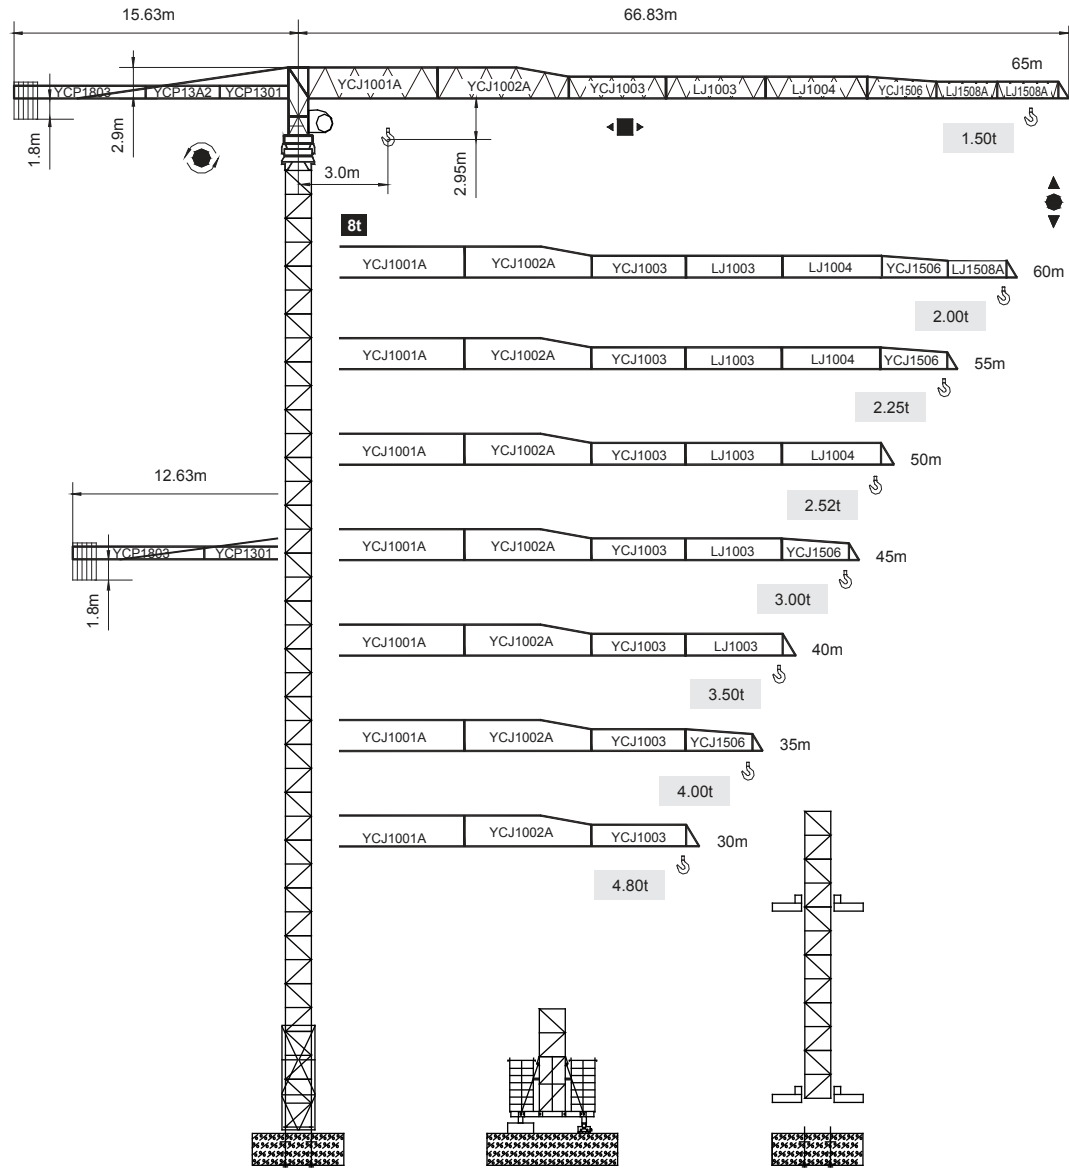

CE FEM

Topless

V 5.0-09112014

平頭系列

037
038

Topless STT153



Topless STT153

STT153
8t

載荷表 Load Chart

STC-8-A(B)-4-V1.0

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	15	20	25	30	35	40	45	50	55	60	65
65	16.46	8.00	8.00	6.34	4.86	3.89	3.21	2.70	2.30	1.99	1.74	1.53	1.35	1.50
60	18.61	8.00	8.00	7.33	5.65	4.54	3.76	3.18	2.73	2.38	2.09	1.85	2.00	1.85
55	18.65	8.00	8.00	7.38	5.69	4.57	3.79	3.20	2.75	2.39	2.10	2.25	2.00	1.85
50	18.52	8.00	8.00	7.30	5.62	4.52	3.75	3.17	2.72	2.37	2.52	2.00	1.85	1.85
45	19.13	8.00	8.00	7.58	5.85	4.71	3.91	3.31	2.85	2.50	2.00	1.85	1.85	1.85
40	19.29	8.00	8.00	7.66	5.91	4.76	3.95	3.35	2.90	2.55	2.00	1.85	1.85	1.85
35	19.46	8.00	8.00	7.74	5.98	4.82	4.00	3.40	2.95	2.60	2.00	1.85	1.85	1.85
30	19.39	8.00	8.00	7.72	5.95	4.80	4.00	3.40	2.95	2.60	2.00	1.85	1.85	1.85

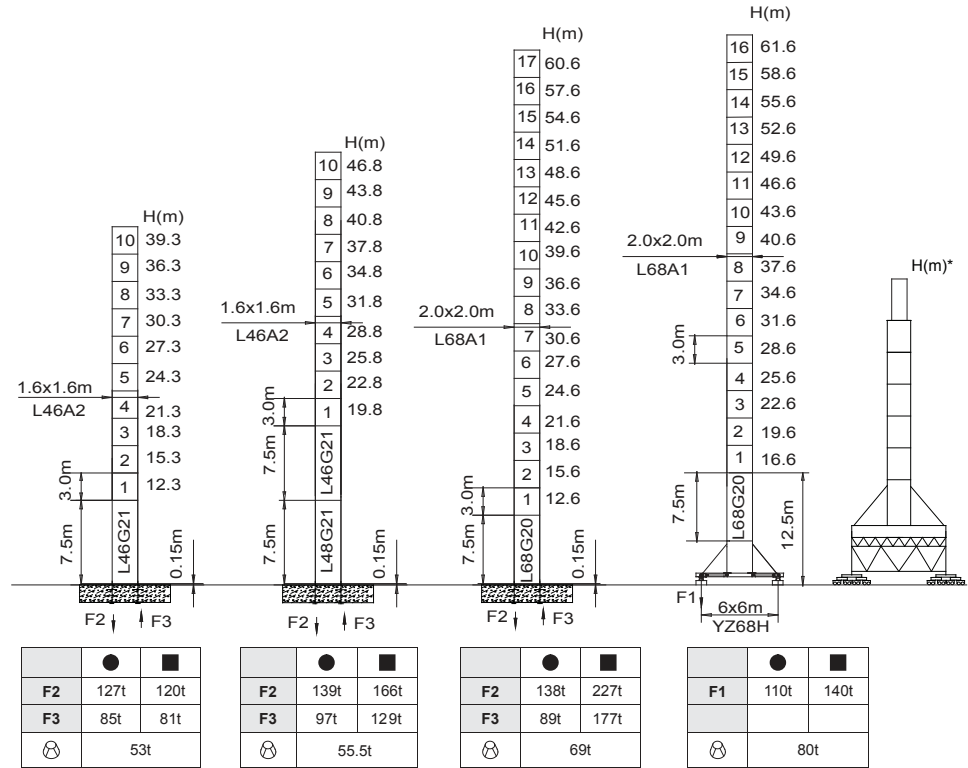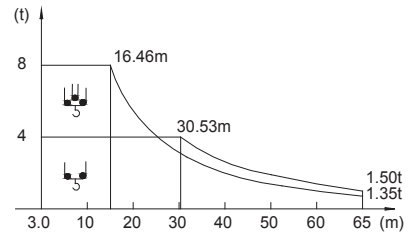

● 工作狀態支反力 In service reaction
■ 非工作狀態支反力 Out of service reaction
○ 整機自由高度重量 (不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

Topless STT153


控永
股茂

YONGMAO HOLDINGS LIMITED


控永
股茂

YONGMAO HOLDINGS LIMITED



STT153
8t

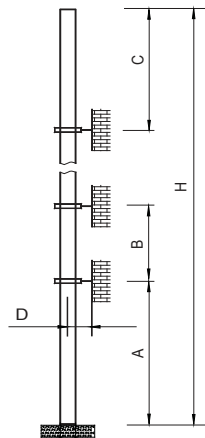

塔身節 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
L46A2	34.5	24	33.3	>3.2	$\frac{235}{>235}$ *
L68A1	45	36	45.6	>3.6	$\frac{270}{>270}$ *

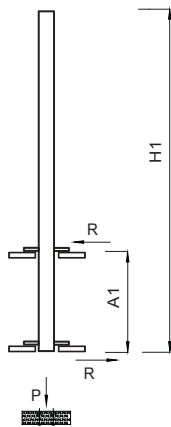

內爬框外廓尺寸
Overall dimensions of the internal climbing frame



內爬開口尺寸
Dimensions of the internal climbing opening

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
L46A2	27.3	7-11	76	26	2.15	1.8	2.45	2.38
L68A1	54.6	16	100	21	2.58	2.17	2.78	3.29

附著道數 Number of tie collars $= (H-A-C)/B+1$

超過100m高度，需降低載荷，請與公司聯繫。

Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.

主要性能參數 Specifications

機構 Mechanism							電動機 Motor kW
		m/min	t	m/min	t		
	30SWR20 ☆	0 - 40 0 - 80	4.0 2.0	0 - 20 0 - 40	8.0 4.0	360m	30/30
	30LFV20	0 - 40 0 - 48 0 - 80	4.0 2.0 0.75	0 - 20 0 - 24 0 - 40	8.0 4.0 1.5	500m	30
	45LFV20	0 - 40 0 - 80	4.0 1.5	0 - 20 0 - 40	8.0 3.0	1090m >1090m *	45
	DTC95A ☆	0 - 57m/min					95N.m
	4DFVA	0 - 57m/min					4
	YMD50 ☆	0 - 0.7rpm					2 x 5
	RTC190	0 - 0.7rpm					2x95N.m
	4RFCV	0 - 0.7rpm					2x95N.m
	RT	12.5 - 25m/min					2x2.6/5.2

供電容量 Power supply	kVA
380V (± 10%) 50 Hz	30LFV20, 30SWR20 : 45 45LFV20 : 70

* 與製造商聯繫 Contact us, please.

☆ 标准配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。

These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

平頭系列

Topless STT153

Topless STT153

STT153
8t



YONGMAO HOLDINGS LIMITED