


永茂建机
YONGMAO

STT373
20t

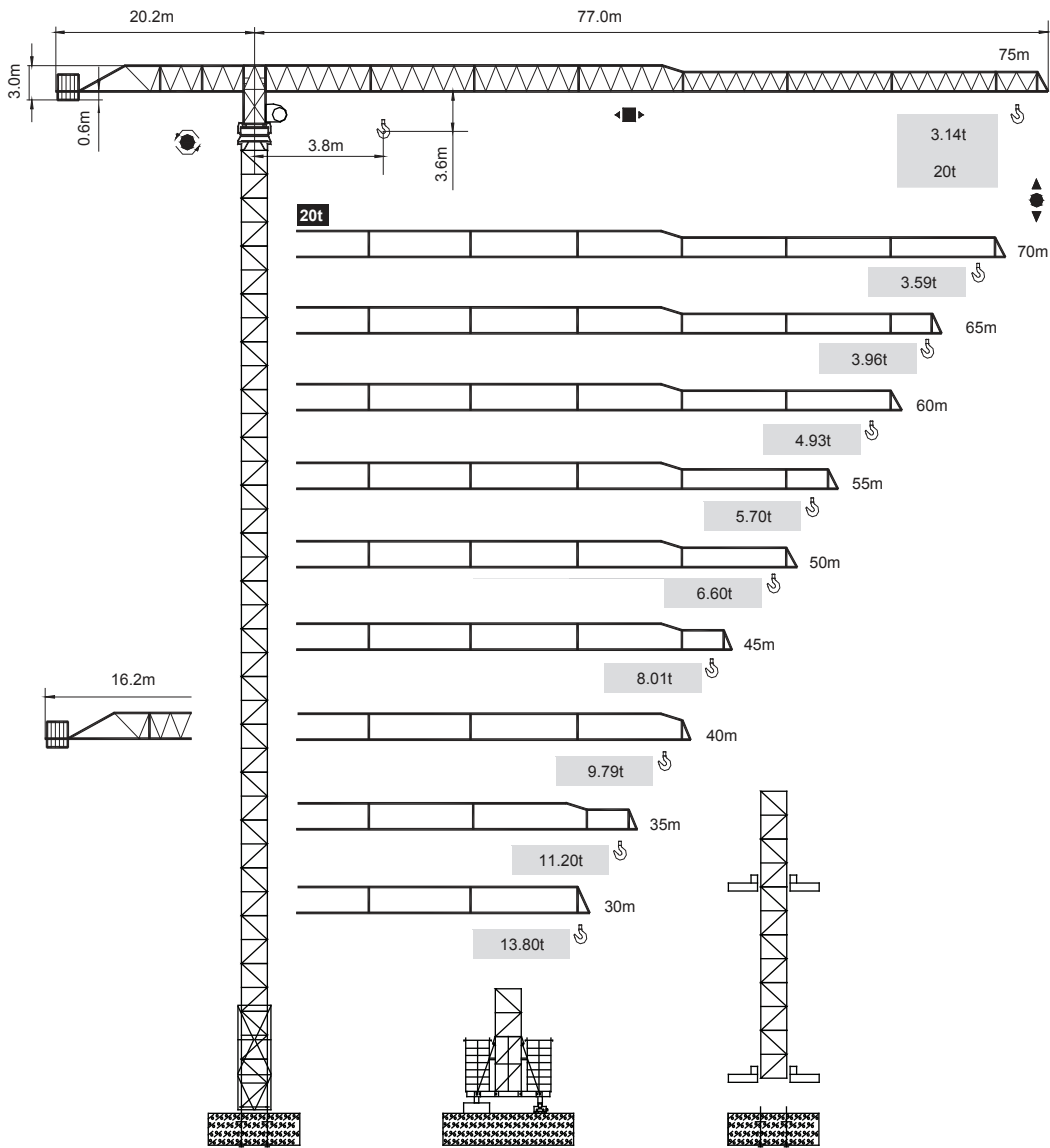

FEM

Topless

V 5.0-09112014

平頭系列

0 0
2 2
3 4

Topless STT373


Topless STT373

STT373
20t

載荷表 Load Chart
雙小車 2-trolley

ST8-20-A(B)-1-V1.0


R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	20	25	30	35	40	45	50	55	60	65	70	75
75	UU	14.71	20.00	14.34	11.00	8.81	7.27	6.12	5.24	4.53	3.96	3.48	3.08	2.74	2.44
	LL	30.54	10.00	10.00	10.00	9.51	7.97	6.82	5.94	5.23	4.66	4.18	3.78	3.44	3.14
70	UU	15.23	20.00	14.90	11.44	9.18	7.58	6.39	5.48	4.75	4.16	3.66	3.25	2.89	
	LL	31.26	10.00	10.00	10.00	9.88	8.28	7.09	6.18	5.45	4.86	4.36	3.95	3.59	
65	UU	15.30	20.00	14.94	11.48	9.21	7.61	6.42	5.50	4.77	4.17	3.68	3.26		
	LL	31.15	10.00	10.00	10.00	9.91	8.31	7.12	6.20	5.47	4.87	4.38	3.96		
60	UU	16.84	20.00	16.66	12.84	10.33	8.57	7.25	6.24	5.43	4.78	4.23			
	LL	32.73	10.00	10.00	10.00	10.00	9.27	7.95	6.94	6.13	5.48	4.93			
55	UU	17.43	20.00	17.30	13.34	10.75	8.92	7.56	6.52	5.68	5.00				
	LL	33.83	10.00	10.00	10.00	10.00	9.62	8.26	7.22	6.38	5.70				
50	UU	17.96	20.00	17.87	13.79	11.12	9.24	7.84	6.76	5.90					
	LL	34.81	10.00	10.00	10.00	10.00	9.94	8.54	7.46	6.60					
45	UU	19.11	20.00	19.14	14.80	11.96	9.95	8.46	7.31						
	LL	37.33	10.00	10.00	10.00	10.00	10.00	9.16	8.01						
40	UU	20.27	20.00	20.00	15.82	12.80	10.67	9.09							
	LL	39.28	10.00	10.00	10.00	10.00	10.00	9.79							
35	UU	21.13	20.00	20.00	16.52	13.40	11.20								
	LL	35.00	10.00	10.00	10.00	10.00	10.00								
30	UU	21.64	20.00	20.00	16.98	13.80									
	LL	30.00	10.00	10.00	10.00	10.00									

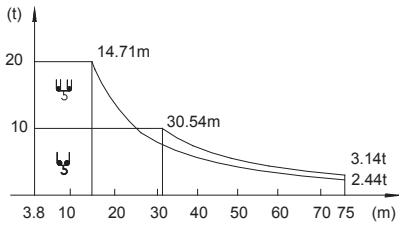

單小車 1-trolley

ST8-20-A(B)-2-V1.0

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	20	25	30	35	40	45	50	55	60	65	70	75
75	UU	14.83	20.00	14.41	11.06	8.87	7.32	6.17	5.29	4.58	4.00	3.53	3.12	2.78	2.58
	LL	27.69	10.00	10.00	10.00	9.09	7.54	6.39	5.51	4.80	4.22	3.75	3.34	3.00	2.70
70	UU	15.03	20.00	14.96	11.50	9.23	7.63	6.44	5.52	4.79	4.20	3.70	3.29	2.93	
	LL	28.61	10.00	10.00	10.00	9.45	7.85	6.66	5.74	5.01	4.42	3.92	3.51	3.15	
65	UU	15.21	20.00	15.11	11.61	9.33	7.71	6.51	5.59	4.85	4.25	3.75	3.33		
	LL	28.85	10.00	10.00	10.00	9.55	7.93	6.73	5.81	5.07	4.47	3.97	3.55		
60	UU	15.62	20.00	15.51	11.93	9.59	7.94	6.71	5.76	5.01	4.39	3.88			
	LL	29.52	10.00	10.00	10.00	9.81	8.16	6.93	5.98	5.23	4.61	4.10			
55	UU	16.90	20.00	16.90	13.03	10.50	8.72	7.39	6.36	5.54	4.88				
	LL	31.83	10.00	10.00	10.00	10.00	8.94	7.61	6.58	5.76	5.10				
50	UU	17.56	20.00	17.59	13.58	10.95	9.10	7.72	6.66	5.81					
	LL	32.97	10.00	10.00	10.00	10.00	9.32	7.94	6.88	6.03					
45	UU	19.09	20.00	19.27	14.90	12.05	10.03	8.54	7.38						
	LL	35.76	10.00	10.00	10.00	10.00	10.00	8.76	7.60						
40	UU	20.28	20.00	20.00	15.92	12.89	10.75	9.16							
	LL	37.88	10.00	10.00	10.00	10.00	10.00	9.38							
35	UU	21.05	20.00	20.00	16.74	13.38	11.20								
	LL	35.00	10.00	10.00	10.00	10.00	10.00								
30	UU	21.62	20.00	20.00	16.98	13.80									
	LL	30.00	10.00	10.00	10.00	10.00									

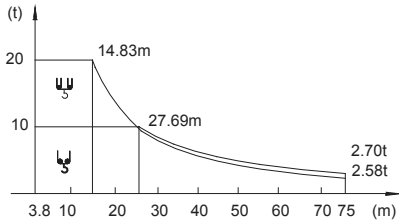

Topless STT373




YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED

STT373
20t

STT373
20t

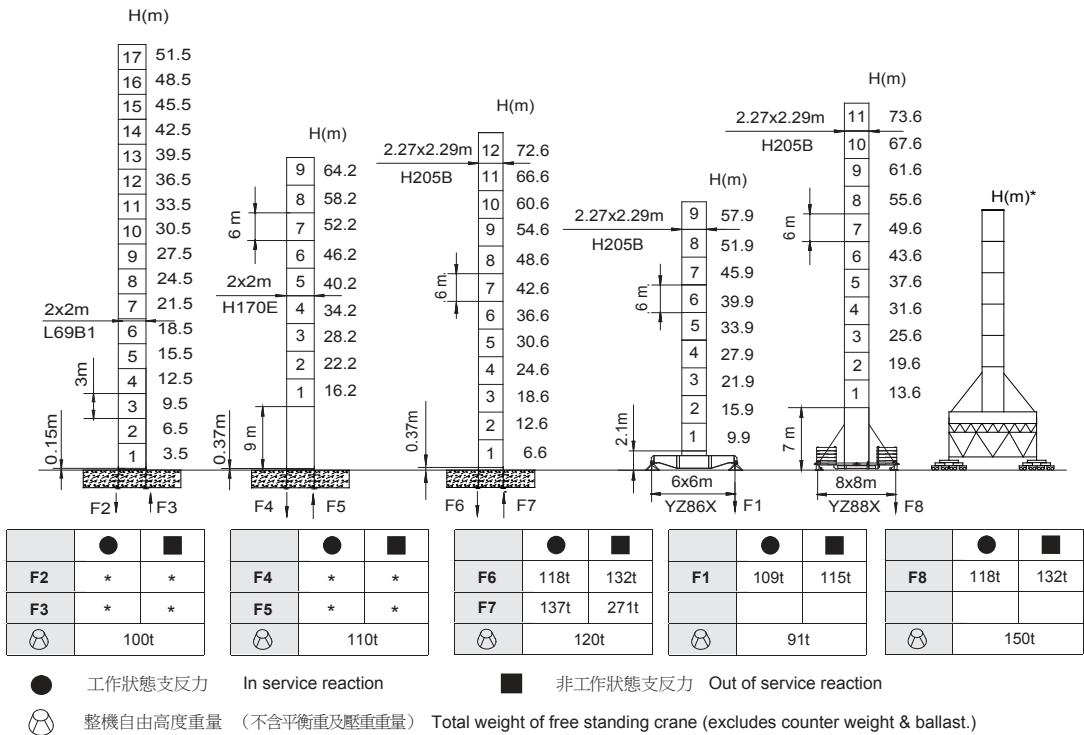

附著道數 Number of tie collars =(H-A-C)/B+1
超過100m高度，需降低載荷，請與公司聯繫。 Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.

Topless STT373

主要性能參數 Specifications

機構 Mechanism	H		H		電動機 Motor kW
	m/min	t	m/min	t	
90LFV50B ☆	0-37 0-47 0-75	10.0 8.0 3.0	0-18 0-22 0-37	20.0 16.0 2.0	550m >550m *
	0-32 0-96 0-160	10.0 8.0 3.0	0-16 0-48 0-80	20.0 12.0 6.0	1030m >1030m *
11DFV10	0-65 m/min				11
7.5RFC	0-0.8 rpm				3 x 7.5
RT	12.5-25.0 m/min				4x2.6/5.2
供電容量 Power supply		kVA			
380V (±10%) 50 Hz		90LFV50B : 135 75LFV50DB : 115			

* 與製造商聯繫 Contact us, please.
☆ 標準配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。
Specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED