


永茂建机
YONGMAO

STT553
24/20/18t

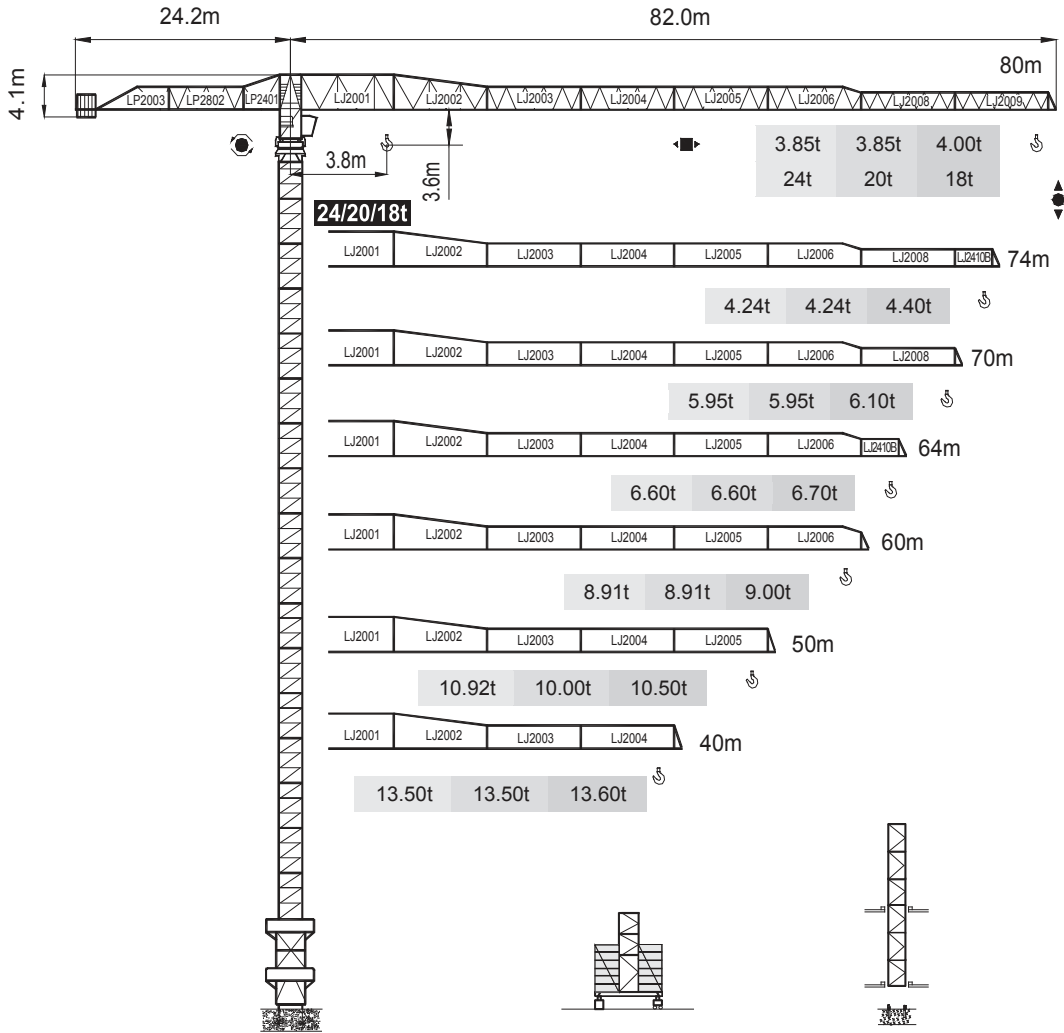

CE FEM

Topless

V 3.0-06012012

平頭系列

0 0
1 1
5 6

Topless STT553


Topless STT553

STT553
24/20/18t

載荷表 Load Chart


24t

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	40	44	50	54	60	64	70	74	80
80	U	15.52	24.00	11.05	7.73	6.83	5.76	5.18	4.46	4.06	3.54	3.24	2.85
	U	30.09	12.00	12.00	8.72	7.83	6.76	6.18	5.46	5.06	4.54	4.24	3.85
74	U	15.52	24.00	11.05	7.73	6.83	5.76	5.18	4.46	4.06	3.54	3.24	2.85
	U	30.09	12.00	12.00	8.72	7.83	6.76	6.18	5.46	5.06	4.54	4.24	3.85
70	U	19.28	24.00	14.41	10.22	9.10	7.75	7.02	6.11	5.60	4.95	4.54	4.24
	U	37.65	12.00	12.00	11.22	10.09	8.75	8.02	7.11	6.60	5.95	5.46	5.06
64	U	19.28	24.00	14.41	10.22	9.09	7.74	7.02	6.11	5.60	4.95	4.54	4.24
	U	37.63	12.00	12.00	11.22	10.09	8.74	8.02	7.11	6.60	5.95	5.46	5.06
60	U	23.38	24.00	18.07	12.95	11.56	9.91	9.02	7.91	7.11	6.60	5.95	5.46
	U	45.87	12.00	12.00	12.00	12.00	10.91	10.02	8.91	8.02	7.11	6.60	5.95
50	U	23.39	24.00	18.08	12.95	11.57	9.92	9.02	7.91	7.11	6.60	5.95	5.46
	U	45.90	12.00	12.00	12.00	12.00	10.92	10.02	8.91	8.02	7.11	6.60	5.95
40	U	24.21	24.00	18.82	13.50	12.00	10.92	10.02	8.91	8.02	7.11	6.60	5.95
	U	40.00	12.00	12.00	12.00	12.00	10.92	10.02	8.91	8.02	7.11	6.60	5.95




20t

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	40	44	50	54	60	64	70	74	80
80	U	18.17	20.00	11.05	7.73	6.83	5.76	5.18	4.46	4.06	3.54	3.24	2.85
	U	35.43	10.00	10.00	8.72	7.83	6.76	6.18	5.46	5.06	4.54	4.24	3.85
74	U	18.17	20.00	11.05	7.73	6.83	5.76	5.18	4.46	4.06	3.54	3.24	2.85
	U	35.43	10.00	10.00	8.72	7.83	6.76	6.18	5.46	5.06	4.54	4.24	3.85
70	U	22.61	20.00	14.41	10.22	9.10	7.75	7.02	6.11	5.60	4.95	4.54	4.24
	U	44.36	10.00	10.00	10.00	10.00	8.75	8.02	7.11	6.60	5.95	5.46	5.06
64	U	22.60	20.00	14.41	10.22	9.09	7.74	7.02	6.11	5.60	4.95	4.54	4.24
	U	44.35	10.00	10.00	10.00	10.00	8.74	8.02	7.11	6.60	5.95	5.46	5.06
60	U	27.45	20.00	18.07	12.95	11.56	9.91	9.02	7.91	7.11	6.60	5.95	5.46
	U	54.10	10.00	10.00	10.00	10.00	10.00	10.00	8.91	8.02	7.11	6.60	5.95
50	U	27.47	20.00	18.08	12.95	11.57	9.92	9.02	7.91	7.11	6.60	5.95	5.46
	U	50.00	10.00	10.00	10.00	10.00	10.00	10.00	8.91	8.02	7.11	6.60	5.95
40	U	28.44	20.00	18.82	13.50	12.00	10.92	10.02	8.91	8.02	7.11	6.60	5.95
	U	40.00	10.00	10.00	10.00	10.00	10.00	10.00	8.91	8.02	7.11	6.60	5.95



18t

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	40	44	50	54	60	64	70	74	80
80	U	20.60	18.00	11.74	8.40	7.50	6.42	5.84	5.12	4.71	4.19	3.89	3.50
	U	38.70	9.00	9.00	8.68	7.82	6.79	6.24	5.55	5.16	4.66	4.37	4.00
74	U	20.60	18.00	11.75	8.41	7.51	6.43	5.85	5.13	4.72	4.20	3.90	3.50
	U	38.90	9.00	9.00	8.73	7.86	6.83	6.27	5.58	5.19	4.69	4.40	4.00
70	U	25.60	18.00	15.07	10.88	9.75	8.40	7.67	6.76	6.25	5.60	5.12	4.71
	U	49.10	9.00	9.00	9.00	9.00	8.82	8.11	7.23	6.74	6.10	5.60	5.12
64	U	25.30	18.00	14.88	10.76	9.64	8.31	7.60	6.70	6.20	5.60	5.12	4.71
	U	48.90	9.00	9.00	9.00	9.00	8.78	8.08	7.19	6.70	6.10	5.60	5.12
60	U	30.70	18.00	18.00	13.35	11.98	10.33	9.44	8.33	7.91	7.11	6.60	5.95
	U	60.00	9.00	9.00	9.00	9.00	9.00	9.00	8.91	8.02	7.11	6.60	5.95
50	U	30.60	18.00	18.00	13.43	12.10	10.50	9.44	8.33	7.91	7.11	6.60	5.95
	U	50.00	9.00	9.00	9.00	9.00	9.00	9.00	8.91	8.02	7.11	6.60	5.95
40	U	30.60	18.00	18.00	13.60	12.00	10.92	10.02	8.91	8.02	7.11	6.60	5.95
	U	40.00	9.00	9.00	9.00	9.00	9.00	9.00	8.91	8.02	7.11	6.60	5.95



Topless STT553




YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED

STT553
24/20/18t


- 工作狀態支反力
In service reaction
- 非工作狀態支反力
Out of service reaction
- ⊗ 整機自由高度重量（不含平衡重及壓重重量）
Total weight of free standing crane
(excludes counter weight & ballast.)

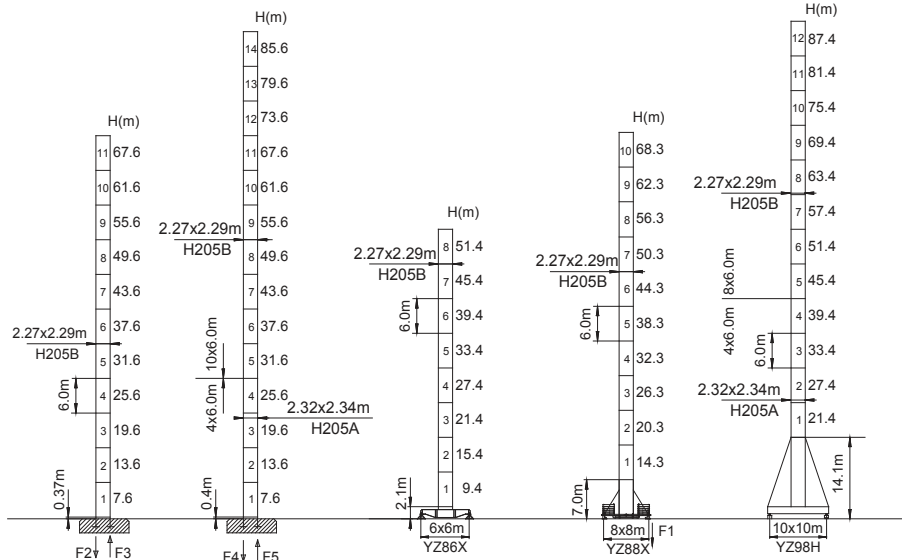

	●	■
F2	312t	237t
F3	223t	163t
⊗	133t	

	●	■
F4	392t	364t
F5	301t	280t
⊗	154.9t	

	●	■
F1	137t	123t
⊗	141t	

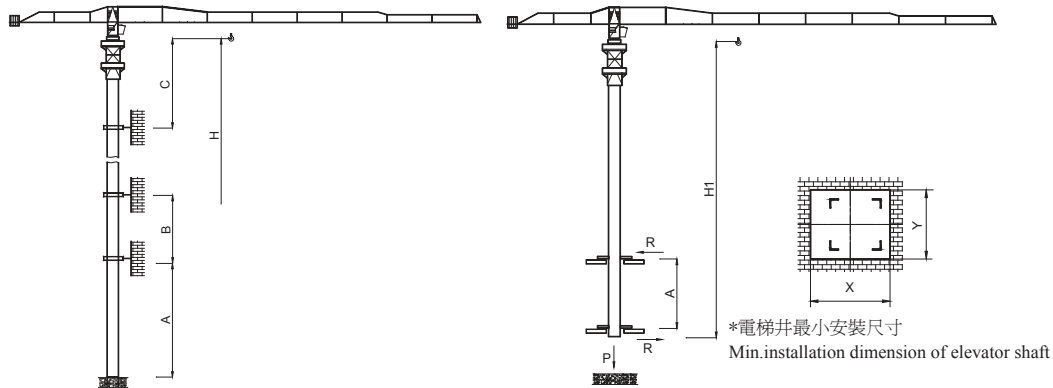

塔身節 Mast	A (m)	B (m)	C (m)	H (m)
H205B	57.0	42.0	52.6	235.6

塔身節 Mast	臂長 Jib length	H1 (m)	A (m)	P (t)	R (t)
H205B	80m	49.2	18	122	40

Topless STT553

STT553
24/20/18t

主要性能參數 Specification

機構 Mechanism			U		U		電動機 Motor kW
			m/min	t	m/min	t	
24t	90LFV60	0—38 0—46 0—72	12.0 10.0 4.0	0—19 0—23 0—36	24.0 20.0 8.0	550m >550m*	90
	90LFV60B						
	90LFV60DB1	0—40 0—96 0—160	12.0 4.0 1.0	0—20 0—48 0—80	24.0 8.0 2.0	1030m >1030m*	90
	75LFV50B	0—37 0—44 0—75	10.0 8.0 3.0	0—18 0—22 0—37	20.0 16.0 6.0	550m >550m*	75
	75LFV50DB1	0—32 0—96 0—160	10.0 3.0 1.0	0—16 0—48 0—80	20.0 6.0 2.0	1030m >1030m*	75
	75LFV45	0—38 0—46 0—76	9.0 6.0 3.0	0—19 0—23 0—38	18.0 12.0 6.0	550m >550m*	75
20t	75LFV45B						
	75LFV45DB1	0—40 0—96 0—160	9.0 3.0 1.0	0—20 0—48 0—80	18.0 6.0 2.0	1030m >1030m*	75
18t							
11DFV10	0—65 m/min						11
7.5RFCV	0—0.8 rpm						3x7.5
RTC435	0—0.8 rpm						3x145
RT	12.5—25 m/min						6x2.6/5.2

裝機容量 (cosΦ=0.8)	kVA
380V (±5%) 50 Hz / 60 Hz	90LFV60, 90LFV60B : 155 90LFV60DB1 : 180 75LFV50B : 135 75LFV50DB1 : 155 75LFV45, 75LFV45B : 120 75LFV45DB1 : 140

* ※ 與製造商聯繫 Contact us, please.

本技术参数不受法律约束，技术信息请详见相应说明书。
Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED