

I 43m - 1.300kg


II 38m - 1.600kg

III 35m - 1.800kg

IV 31m - 2.100kg


V 26m - 2.400kg

VI 23m - 2.500kg

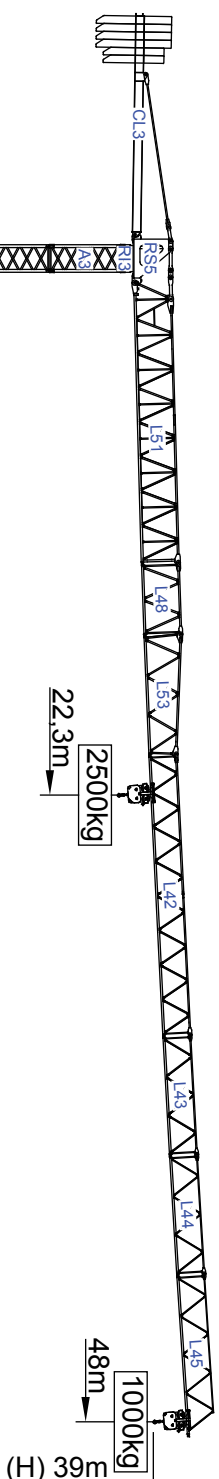

Cargas, Loads, Lasten, Charges, Cargas, Carichi, Yüklər, грузы, ПОГРУЖЕНОСТЬ

11000 kg 4x2000 + 2x1500 kg	48m	L51+L48+L53+L42 L43+L44+L45	22,3 m	23	26	31	35	38	43	48
11000 kg 4x2000 + 2x1500 kg	43m	L51+L48+L53+L42 L43+L45	24,6 m	2500	2350	1920	1670	1510	1300	
9500 kg 4x2000 + 1x1500 kg	38m	L51+L48+L53+L42 L45	25,8 m	2500	2480	2030	1760	1600		
8000 kg 4x2000 kg	35m	L51+L53+L42+L45	26,3 m	2500	2500	2070	1800			
8000 kg 4x2000 kg	31m	L51+L48+L53+L43 L45	26,7 m	2500	2500	2100				
7000 kg 2x2000 + 2x1500 kg	26m	L51+L48+L53+L45	25,1 m	2500	2400					
5000 kg 1x2000 + 2x1500 kg	23m	L51+L48+L45	23 m	2500						

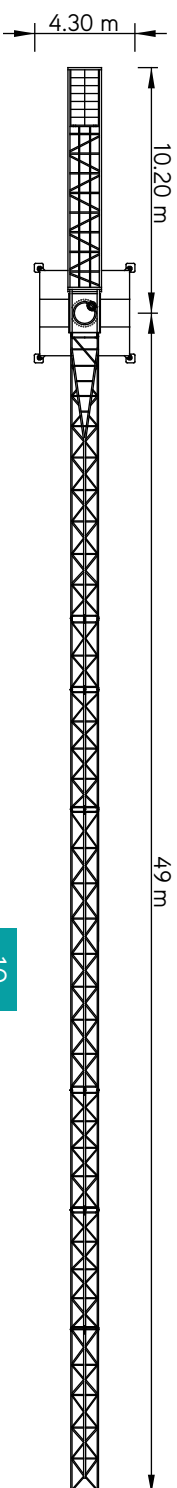


SGT 4810TL

Characteristics . Características . Eigenschaften
Caractéristiques . Carcterísticas . Carsteristiche
Özellikler . ХАРАКТЕРИСТИКИ

48m - 1.000kg




2.500Kg

0 a 1 r.p.m.	2x4 daN/m
0 a 50 m/min	1,5 kW
15 m/min	2x3 kW

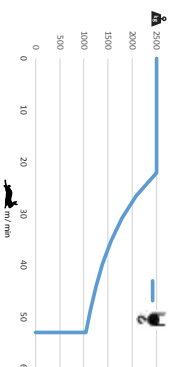

26 kVA
400 V +- 5% (50/60 Hz)

Velocidade de elevação . Hoisting speed . Hufgeschwindigkeit . Vitesse d'élévation .
Velocidad de elevación . Velocità di sollevamento . Kaldırma hızı (m/min) .
Скорость подъёма (м/мин)

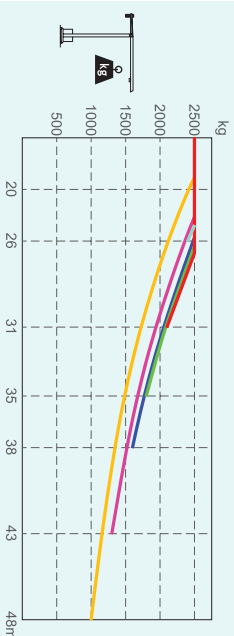

Elementos . Parts . Teile . Éléments . Elementos . Elemento . Parçalar . ЭЛЕМЕНТЫ

		A (mm)	B (mm)	C (mm)	kg	Code
L51		11950	1300	2250	2900	530 48 10
L48		3190	1160	1650	350	
L53		5200	1160	1650	510	
L42		11820	1160	1210	820	
L43		5100	1160	1210	260	
L44		5100	1160	1210	230	
L45		6800	1160	1210	290	
RS5 R13		2150	1320	2200	2800	
CL3		9350	1380	560	2000	
CP1		1160	320	2530	2x1500 3000	704 15 00
CP2		1160	330	3140	4x2000 8000	704 20 00
TOTAL						21160
A3		11985	1180	1180	2450	504 12 00
A3		6075	1180	1180	1300	504 06 00
A3		3120	1180	1180	720	504 06 01
A3		3120	1385	1385	810	504 06 03
A3		1200	1160	1160	350	504 06 02
TOTAL						2145
A3		5525	500	635	1075	604 00 01
A3		2670	360	635	2x535 1070	