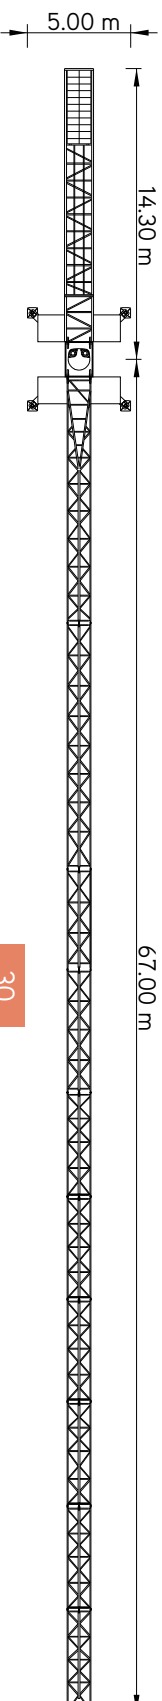


Cargas.Loads.Lasten.Charges.Cargas.Carichi.Yükler.ГРУЗОПОДЪЕМНОСТЬ

		Kg / m		m	18	23	28	33	38	40	45	50	55	60	65
															
19000 kg	65m	8000	4000	28.8 m	4000	4000	4000	3440	2920	2750	2390	2100	1860	1670	1500
9x2000 + 1x1000 kg	L68+L69+L73+L70+L56+L76+L65+L66	15.3 m		15.3 m	6720	5150	4140	3440	2920	2750	2390	2100	1860	1670	1500
18000 kg	60m		33.3m	33.3m	4000	4000	4000	4000	3450	3250	2830	2500	2330	2000	
8x2000 + 2x1000 kg	L68+L69+L73+L70+L56+L76+L65+L66	17.6 m		17.6 m	7830	6020	4860	4050	3450	3250	2830	2500	2330	2000	
18000 kg	55m		35.4 m	35.4 m	4000	4000	4000	4000	3700	3490	3040	2690	2400		
8x2000 + 2x1000 kg	L68+L69+L73+L70+L56+L76+L65+L65	18.8 m		18.8 m	8000	6430	5200	4330	3700	3490	3040	2690	2400		
17000 kg	50m		36.7 m	36.7 m	4000	4000	4000	4000	3840	3630	3170	2800			
8x2000 + 1x1000 kg	L68+L69+L73+L70+L56+L76+L65	19.4 m		19.4 m	8000	6670	5390	4500	3840	3630	3170	2800			
16000 kg	45m		38.0 m	38.0 m	4000	4000	4000	4000	3780	3780	3300				
8x2000 kg	L68+L69+L73+L70+L56+L76	20.1 m		20.1 m	8000	6920	5610	4680	4000	3780	3300				
15000 kg	40m		38.2 m	38.2 m	4000	4000	4000	4000	3800	3800					
7x2000 + 1x1000 kg	L68+L69+L73+L70+L56	20.2 m		20.2 m	8000	6980	5640	4710	4030	3800					
13000 kg	38m		38.0 m	38.0 m	4000	4000	4000	4000	4000						
6x2000 + 1x1000 kg	L68+L73+L70+L56+L76+L65	20.1 m		20.1 m	8000	6930	5610	4680	4000						
11000 kg	33m		36.7 m	36.7 m	4000	4000	4000	4000							
5x2000 + 1x1000 kg	L68+L73+L70+L56+L76	19.4 m		19.4 m	8000	6670	5390	4500							
10000 kg	28m		34.2 m	34.2 m	4000	4000	4000								
5x2000 kg	L68+L73+L70+L56	18.1 m		18.1 m	8000	6200	5000								



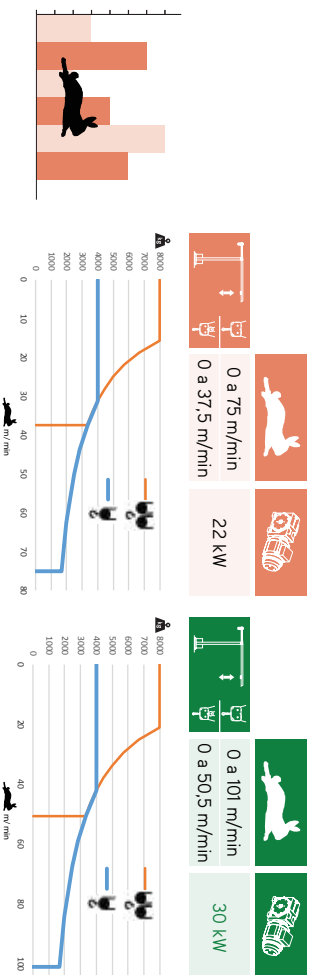
SGT 6515TL

Characteristics . Características . Eigenschaften
Característiques . Características . Caratteristiche
Özellikler . ХАРАКТЕРИСТИКИ

65m - 1.500kg

8.000Kg

	
0 a 1 r.p.m.	2x6,5 daNm
0 a 60 m/min	5,5 kW
0-10 m/min	2x4 kW

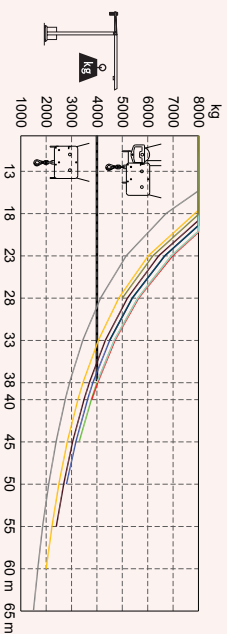



48 kVA
400 V +- 5% (50/60 Hz)














58 kVA
400 V +- 5% (50/60 Hz)

Velocidade de elevação . Hoisting speed . Hubgeschwindigkeit . Viesses d'élevation .
Velocidad de elevación . Velocità di sollevamento . Kaldırma hızı (m/min) .
Скорость подъема (м/мин)



28 — 33 — 38 — 40 — 45 — 50 — 55 — 60 — 65

Elementos . Parts . Teile . Éléments . Elementos . Elemento . Parçalar . ЭЛЕМЕНТЫ

		A (mm)	B (mm)	C (mm)		Code
L68		11970	1900	2900	5050	531 60 15
L69		11960	1160	2260	1650	
L73		5230	1160	2260	750	
L70		6200	1160	1950	680	
L56		5200	1160	1930	590	
L76		5180	1160	1610	370	
L65		5110	1160	1610	2x330 660	
L66		5110	1160	1610	2x300 600	
RS9 R19		2505	1700	1950	4650	
P8		2230	1300	820	830	
CL15		1850	1300	2280	985	704 10 00
CL4		11400	1500	500	4000	
CP3		1160	165	3140	1000	
CP2		1160	330	3140	9x2000 18000	
TOTAL					39815	704 20 00
B1		12000	1620	1620	3450	508 12 00
B1		6130	1620	1620	1800	508 06 00
B1		3195	1620	1620	1070	508 06 01
B1		3195	1830	1830	1100	508 06 03
B1		1775	1600	1600	650	508 06 02
TOTAL					3750	608 00 01
B1		6620	500	1040	1850	608 00 01
B1		3210	340	1040	2x950 1900	